


LIFTING JIB



**Quick mounting on forks.
Approved by an inspection body.
2 models.**

⚠ ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

LIFTING JIB

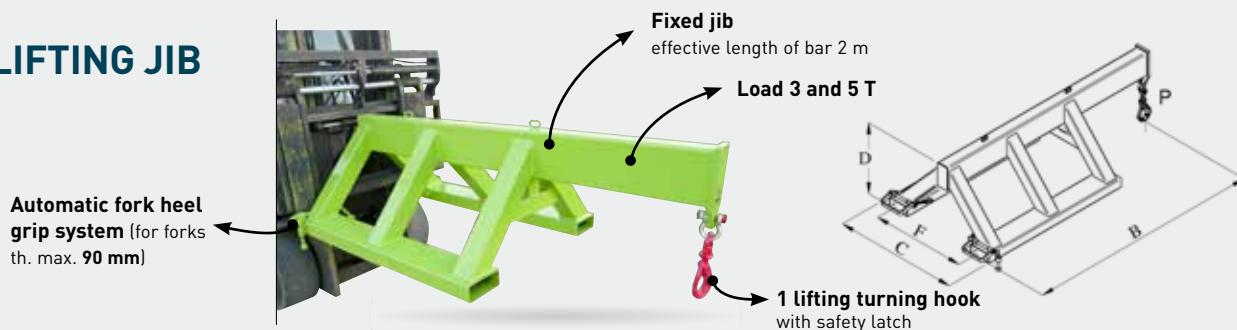


CHARACTERISTICS

**Ref. CRP31300 – 3T
Ref. CRP31500 – 5T**
— Raised beam to save lifting height

Load kg	B	C	D	F	Fork sleeves ins.	Weight kg	Painted ref.
3000	2000	1060	615	800	192 x 112	160	CRP31300
5000	2000	1080	615	800	192 x 112	181	CRP31500

Dimensions in mm for basic model (for guidance only).

ADJUSTABLE LIFTING JIB

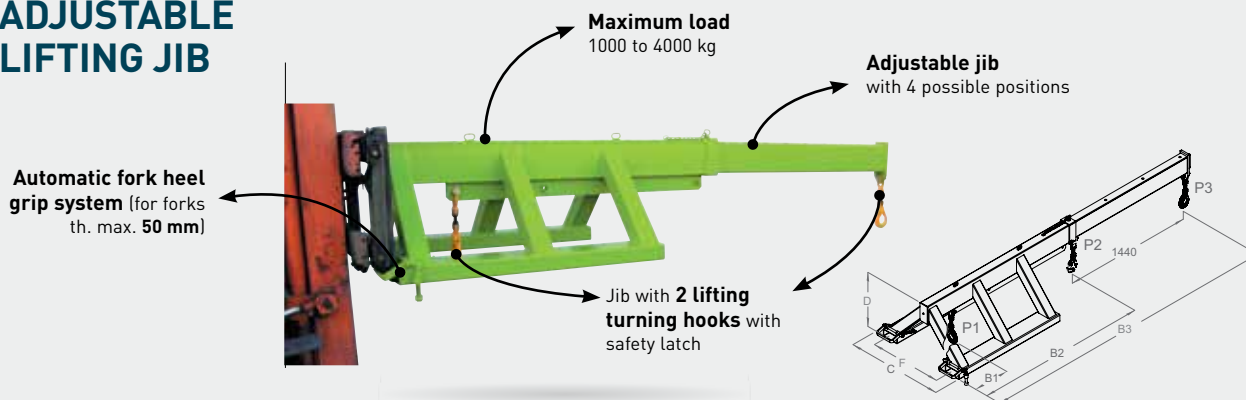

CHARACTERISTICS

Ref. CRP30000
— Adjustable jib : 1960 to 3400 mm
— Maximum load : 1000 to 4000 kg (see table for details)
— Check forklift capacity and suitability before use

B1	B2	B3	C	D	F
395	1960	3400	1060	635	800
Fork sleeves ins.		Weight kg	Painted ref.		
170 x 70		216	CRP30000		

Dimensions in mm for basic model (for guidance only).

