


TIPPING SKIP

POLYETHYLENE



Corrosion proof.
Ideal for liquids or wet products.
Painted, galvanized or stainless steel chassis.

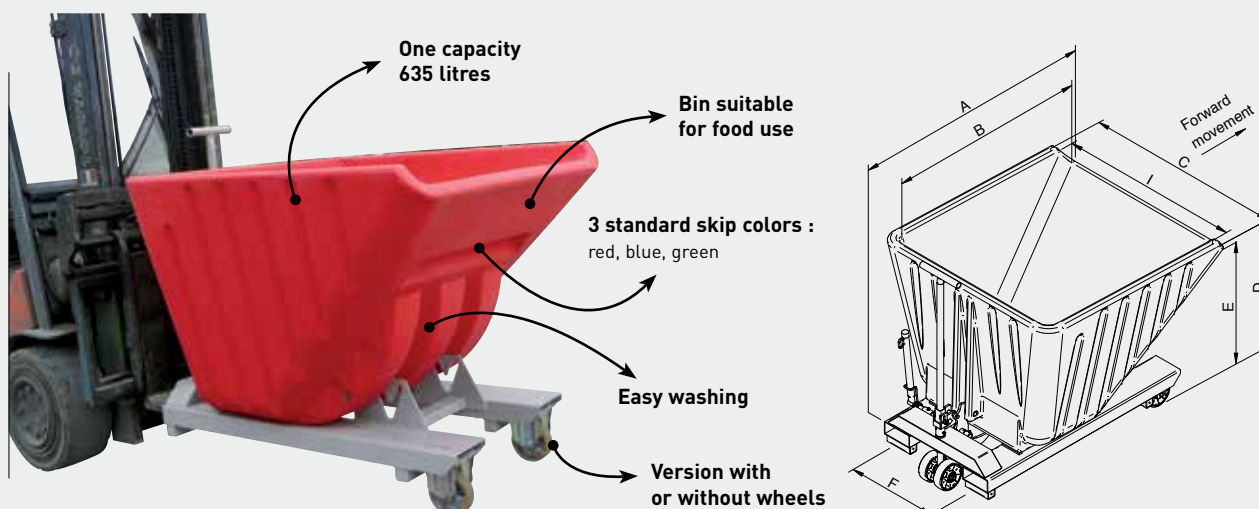

CHARACTERISTICS

- Load capacity : 1000 kg
- Robust, double-walled, PE skip thickness 8 mm
- Safety tipping lock prevents unintended use
- Tipping starts automatically on contact and manually by pulling the lever
- Skip is tipped by tilting the forklift mast forward
- Automatically returns to locked position when tilting mast backwards
- Fork sleeves : Aperture : 170 x 70 mm. Spacing (F) : 560 mm
- Pedestal mounted models (no use of pallet truck)
- Castor-mounted models have 2 fixed and 2 twinned castors, Ø160 aluminium polyurethane with steering bar – front movement
- Supplied with 1 safety chain
- Options: mounting onto nylon, treaded or steel wheels, attachment of coupling bar

Capacity litres	Load kg	Castors Ø	Skip color	A	B	C	I	D	E	F	Weight kg	Painted chassis ref.
635	1000	-	red	1510	1200	1200	1080	1035	945	560	150	GMP03000
635	1000	160	red	1510	1200	1200	1080	1120	1030	560	162	GMP03161
635	1000	-	blue	1510	1200	1200	1080	1035	945	560	150	GMP05000
635	1000	160	blue	1510	1200	1200	1080	1120	1030	560	162	GMP05161
635	1000	-	green	1510	1200	1200	1080	1035	945	560	150	GMP06000
635	1000	160	green	1510	1200	1200	1080	1120	1030	560	162	GMP06161

Dimensions in mm for basic model (for guidance only).