


LOADING SHOVEL

HYDRAULIC TILTING



For use with forklift.
Hydraulic tipping.
Comfort of use.
For loading bulk products from ground level.

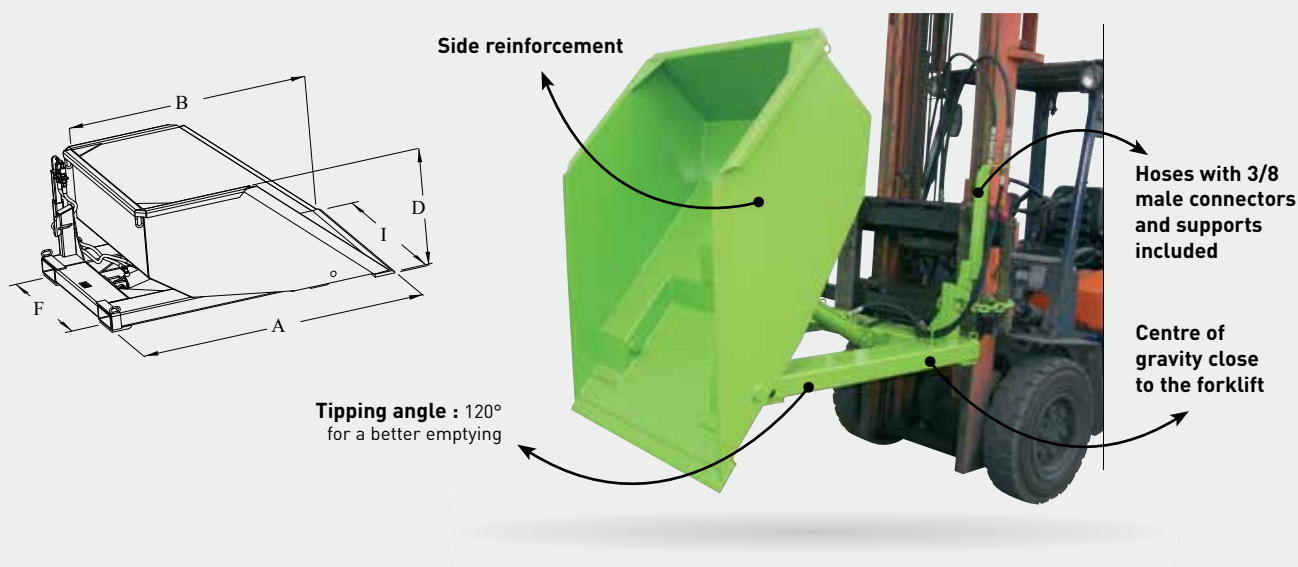

CHARACTERISTICS

- Capacity : 0.25 m³ to 4 m³
- Flat bottom : 5 and 6 mm following capacities
- Beveled blade, 400 HB, 15 mm sheet metal
- Hydraulic dumping : connect a double-acting cylinder to forklift (side shift carriage) 4 m³ model has 2 cylinders
- Hoses with 3/8 male connectors and supports included

Capacity m ³	Load kg	A	B	I	D	F	Fork sleeves ins.	Fork CDG	Weight kg	Painted ref.
0.25	1000	1590	1270	750	450	535	170 x 70	850	210	PHP07502
0.5	1500	1590	1300	1000	650	785	170 x 70	700	256	PHP10005
0.8	2000	1620	1300	1300	740	700	170 x 70	720	309	PHP13010
1.2	2000	1790	1500	1500	820	900	170 x 70	780	395	PHP15015
1,7	2500	1790	1500	2150	820	900	170 x 70	800	457	PHP20020
2	3000	1790	1500	2150	1020	900	170 x 70	780	488	PHP20025
2,5	3000	1880	1700	2150	1070	900	170 x 70	750	584	PHP20030
3	3500	1880	1700	2500	1220	1000	170 x 70	700	704	PHP25040

Dimensions in mm for basic model (for guidance only).