


# LOADING SHOVEL

## MECHANICAL TILTING



**For use with forklift.**  
**Manual tipping.**  
**For loading bulk products from ground level.**

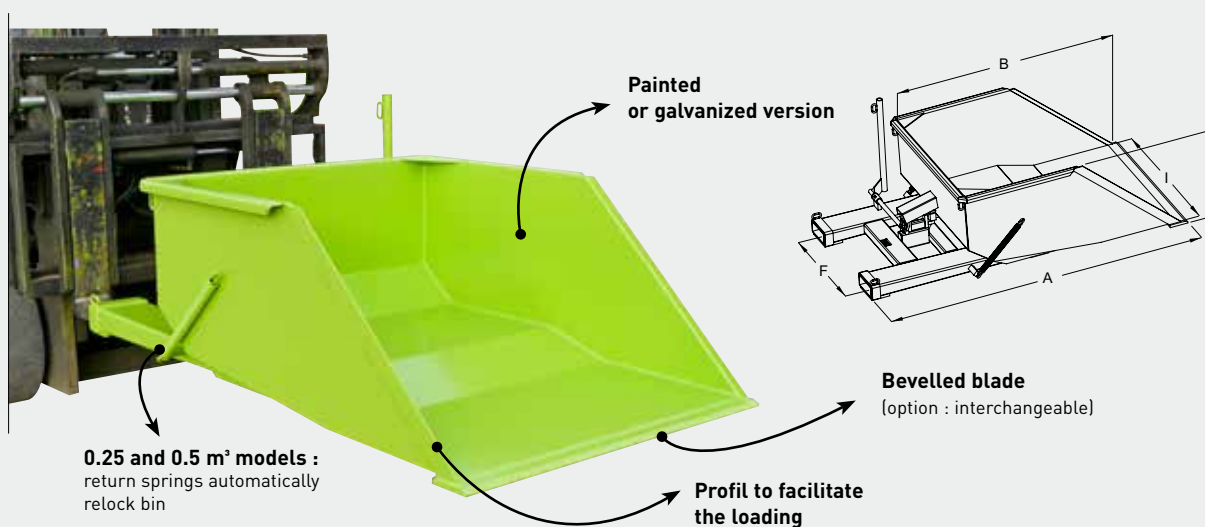

Flat bottom  
reinforced by  
folding and gussets



Bottom relocks when  
it strikes the ground



Chassis reinforced  
by double crossbar

### CHARACTERISTICS

- Capacity 0.25 to 2.5 m<sup>3</sup>
- Flat bottom : 5 mm sheet metal (0.25 m<sup>3</sup> to 0.8 m<sup>3</sup> models) or 6 mm sheet metal (1.5 m<sup>3</sup> to 4 m<sup>3</sup> models)
- Beveled blade, 400 HB, 15 mm sheet metal
- Welded band reinforces fork sleeves entry points
- Tipping angle : 120°
- Metal casing protects locking spring and hook
- Safety chain included

| Capacity<br>m <sup>3</sup> | Load<br>kg | A    | B    | I    | D    | F   | Fork<br>sleeves<br>ins. | Fork<br>CDG | Weight<br>kg | Painted<br>ref. |
|----------------------------|------------|------|------|------|------|-----|-------------------------|-------------|--------------|-----------------|
| 0.25                       | 1000       | 1720 | 1100 | 750  | 490  | 470 | 170 x 65                | 1060        | 168          | PMP07502        |
| 0.5                        | 1500       | 1940 | 1300 | 1000 | 560  | 700 | 170 x 65                | 1060        | 220          | PMP10005        |
| 0.8                        | 2000       | 1950 | 1300 | 1300 | 760  | 700 | 170 x 65                | 1060        | 270          | PMP13010        |
| 1.3                        | 2000       | 1950 | 1500 | 1500 | 800  | 900 | 170 x 65                | 1110        | 353          | PMP15015        |
| 1,8                        | 2500       | 1855 | 1500 | 2150 | 800  | 900 | 170 x 70                | 1050        | 445          | PMP20020        |
| 2                          | 2500       | 1855 | 1500 | 2150 | 1010 | 900 | 170 x 70                | 1030        | 470          | PMP20025        |

Dimensions in mm for basic model (for guidance only).