

# MULTI-FUNCTION HITCHING


AM



All-in-one tool – inspection body approved  
For fitting on forklift forks.  
2 models


## AMP30000 Model

FOR CLASS III and II

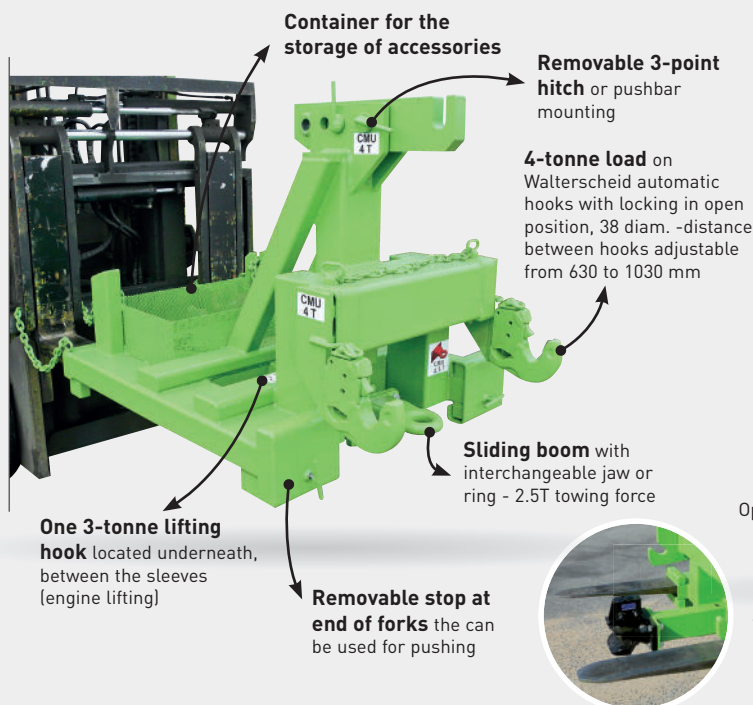

## Réf. AMP05000

For towing and lifting

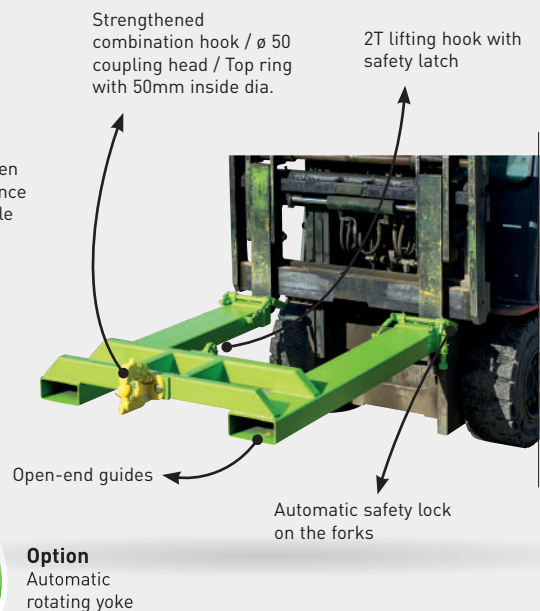

**! ATTENTION :** Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

### CHARACTERISTICS

#### AMP30000

- Handling of agricultural machines
- Made-to-measure according to the application from the basic version, AMP30000.
- Forklift truck fork grip
- Three-point towing with hooks and adjustable push bar boom
- Telescopic boom with hook for towing trailer, spreader, etc...
- Type-approved by a regulatory control body
- Options: hydraulic fork grip and removable boom arm



### CHARACTERISTICS

#### AMP05000

- Fork pick-up in guides with an inside section of 170x70 – centre distance 800mm
- Static vertical load on the combination hook: 375kg
- Maximum towable load on the ball hitch: 3T5
- 2T load on the inner lifting hook
- Fork guides, length 1250mm
- Weight 80kg