
TIPPING FRAME







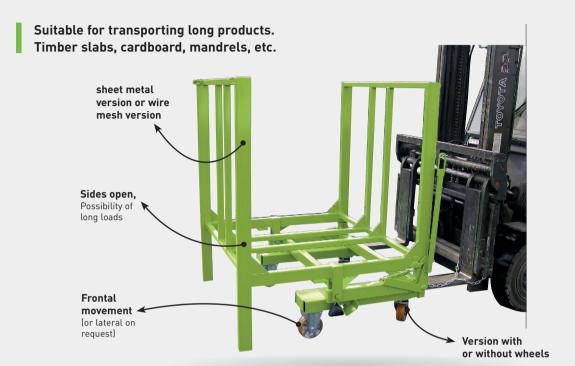

CHARACTERISTICS

- Volume : 1300 dm 3
- Tubular frame with gusset plates
- Safety latch for transport (disengage before tipping)
- Lever for manual tipping
- Fork sleeves can be modified on request.
 5mm sheet metal. Aperture: 170 x 70mm.
 Spacing: 900mm.
- Pedestal-mounted models can be used with pallet trucks between fork sleeves
- Castor-mounted models (forward movement) have 2 fixed + 2 pivoting Ø160mm alu/polyurethane castors and a bandrail
- Safety chain included
- For customised products, please contact us.
- Options on request

Capacité dm³	Load kg	Castors Ø	Latéral		Frontal		Overall	Weight	Painted
			Overall	Interior	Overall	Interior	height	kg	ref.
1300	2000	-	1265	1050	1300	1200	1400	148	GCP00000
1300	1800	160	1265	1050	1300	1200	1520	160	GCP00161

Dimensions in mm for basic model (for guidance only).

