


# LOADING SHOVEL

## MECHANICAL TILTING



For use with forklift.  
Manual tipping.  
For loading bulk products from ground level.

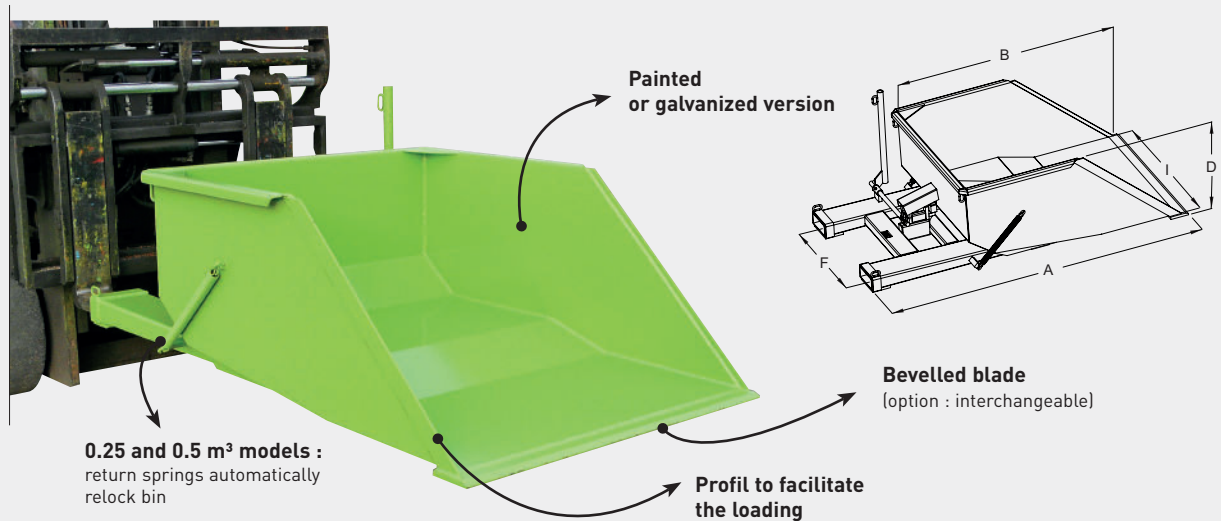

### CHARACTERISTICS

- Capacity 0.25 to 2.5 m<sup>3</sup>
- Flat bottom : 5 mm sheet metal (0.25 m<sup>3</sup> to 0.8 m<sup>3</sup> models) or 6 mm sheet metal (1.5 m<sup>3</sup> to 4 m<sup>3</sup> models)
- Bevelled blade, 400 HB, 15 mm sheet metal
- Welded band reinforces fork sleeves entry points
- Tipping angle : 120°
- Metal casing protects locking spring and hook
- Safety chain included

Capacity m <sup>3</sup>	Load kg	A	B	I	D	F	Fork sleeves ins.	Fork CDG	Weight kg	Painted ref.
0.25	1000	1720	1100	750	490	470	170 x 65	1060	168	PMP07502
0.5	1500	1940	1300	1000	560	700	170 x 65	1060	220	PMP10005
0.8	2000	1950	1300	1300	760	700	170 x 65	1060	270	PMP13010
1.5	2000	1950	1500	1500	800	900	170 x 65	1110	353	PMP15015
2	2500	1855	1500	2150	800	900	170 x 70	1050	445	PMP20020
2.5	2500	1855	1500	2150	1010	900	170 x 70	1030	470	PMP20025

Dimensions in mm for basic model. (for guidance only).