

HUMANS EXPERTISE SOLUTIONS

A large, bright green metal skip is shown in a close-up, angled view, highlighting its heavy-duty construction and sloped sides. The skip is set against a light grey, textured background.

● SKIPS

● SHOVELS & BUCKETS

● HOPPERS

● ACCESSORIES

● CUSTOM-MADE

● OPTIONS

REACTIVITY

MADE IN FRANCE

ERGONOMICS

SELECTIVE SORTING / ENVIRONMENT

HANDLING

CONFIDENCE

QUALITY

SAFETY

MADE TO MEASURE

INNOVATION

ROBUSTNESS

ADVICE

KNOWHOW

Confidence increases as time passes :

Airbus, Arcelor, Areva, Beneteau, Bonduelle, Carbone Savoie, Cointreau, Fenwick, Gedimat, La Plateforme du Bâtiment, Lafarge, Lapeyre, Manitou, Michelin, Nestlé, Point P, RATP, Saint-Gobain, Sita, SNCF, Suez, Tefal, Terrena, Valeo, Véolia, ...

A FAMILY WITH GREAT IDEAS IN THE SERVICE OF BUSINESSES

1938 : Louis Goubard, visionary businessman, founds in Chevigné (49) his company for manufacturing agricultural equipment, first in wood and then in steel (wagons, tumbrels, barrels, tractor trailers etc).



1968 : Pascal Goubard, son of the founder, joins the company with his wife Monique. With his eye for innovation, he designs the first tipping trailers for refuse, including a version, capable of being held by a forklift, for use in the wood industry.



1974 : Goubard plays an active part in the Paris International Handling Equipment Fair. The «dare to be different» nature of its products is noted, and marketing of Goubard trailers extends nationwide. The trailers adopt their green colour as a sign of recognition of the make.

1992 : The company moves to a new site at Seiches-sur-le-Loir (49) and steps up its industrial production (total of 10 employees).

1993 : Early death of Pascal Goubard Gérard Toulhier, brother of Monique Goubard, takes over and becomes the manager.

2005 : Already a leader in France, Goubard branches out to international level, extending into Europe.

2018 : Goubard now employs 59 people, produces over 6,000 items a year and offers the widest range available on the market, with 70 different skips, hoppers, buckets, shovels plus lifting and handling accessories.



ALWAYS OFFER THE BEST SOLUTIONS

Ever since it was founded, Goubard has been distinguished by its readiness to offer each client the solutions best adapted to their needs.

Our in-depth knowledge, our sense of innovation and our capacity for made-to-measure manufacture help us meet all your expectations.



THE WIDEST CHOICE ON THE MARKET

As France's leading manufacturer of skips, Goubard can provide over 600 references, standard or made to measure, with 70 different skips, hoppers, buckets, shovels and spades, plus lifting and handling accessories.

This is what makes the Goubard products' reputation :

- **Quality and reliability**
- **Robustness and safety**
- **Reactive and made to measure**
- **100% French design and manufacture, in our workshops at Seiches-sur-le-Loir**
- **Compliance with European standards**
- **Innovation and exclusive patents**



RESEARCH AND DEVELOPMENT

A five-strong team in our study office is continually working to improve our products, by always looking out for changes in your needs. Goubard thus endeavours every day to design and develop innovative technical responses that meet the specific demands of your area of work in every way.

Goubard cares about your experience as a user.

Can't find a standard model that suits you? Always ready to listen to you, we will provide you with made-to-measure manufactured items by developing optimised solutions for your each and every need.



OUR COMMITMENT

In a constructive and transparent relationship with its clients, Goubard will accompany you on a daily basis, in a spirit of long-term partnership based on fundamental values and assets such as :

- High-quality work
- Desire for client satisfaction
- A sense of innovation
- Human values
- Flexibility of adaptation
- Ongoing client assistance

THE TEST A UNIQUELY Goubard OFFER

To ensure that you are sure of your choice, Goubard offers you a chance to test before you commit.

95% of clients who test our products later buy them!

To find out about test methods and test an item of Goubard equipment, call :

+33 2 41 76 36 52



www.goubard.fr

Go on line to find all our products and options, more photos, and demonstration videos... All the information needed for making the right choice!



MEN AND WOMEN BY YOUR SIDE

Z.A. de Suzerolle nord
CS 80035
49140 Seiches-sur-le-Loir, France

T. +33 (0)2 41 76 36 52
F. +33 (0)2 41 76 63 33
export@goubard.fr
www.goubard.fr

**Your contacts are always ready
to listen to you by phone,
Monday to Friday.**



A TEAM AT THE HEART OF YOUR PROJECTS



Depending on where you are located, contact directly

EXPORTS

Martine FAUQUEREAU

RESEARCH & DEVELOPMENT, MADE TO MEASURE PRODUCTS

Jérémie BOURDILLON
Technical Manager

BUSINESS SECTOR


Dépt. EVEN-NUMBERED*

Martine FAUQUEREAU, Sector Manager
Amélie ZAMPARO, Business Manager

Dépt. IODD-NUMBERED*

Nathalie CHAUVELLIER, Sector Manager
Sandrine JUMEAU, Business Manager

* Département No



OUR SOLUTIONS



SOLUTIONS WITH PEOPLE IN MIND...

The safety of the operative and their working conditions have always been at the core of the design of our products.

Several innovations and patents have strengthened active and passive safety :

- Automatic unlocking of tilting by switch
- Fork locking
- Slide limiter
- Safety latch

All our products are compliant with the health and safety requirements of European Directive 2006/42/EC of 17 May 2006.



...AND THE ENVIRONMENT

Fully involved in your environmental procedures, **through our products, we help optimize the collection and sorting of waste in your company.**

With a genuine understanding of the realities of your business, we integrate your industrial processes and the regulatory constraints of your equipment to provide you with effective and sustainable solutions, while reconciling cost savings, productivity and technical expertise.



CONSTANT INNOVATION

Our technical teams design and develop new products to anticipate the expectations of the various markets and standards. They are highly committed to research and development in order to design and manufacture solutions that you can trust. With our historical and local know-how, we are cultivating the « Made in France » mentality.



CUSTOMISED SOLUTIONS FOR ALL REQUIREMENTS

Build the product that best meets your requirements in complete freedom :


- Dozens of options adapted to all requirements
- Painted, galvanized or stainless steel finish
- Choice of colour
- Option of special tailor-made products



For information on all the details and terms and conditions for made-to-measure ordering, refer to page 107 of the catalogue.

SOLUTIONS FOR ALL HANDLING OPERATIONS

Our products are equipped with various type of grips depending on your handling equipment :

- Front forklift fork grips, with rotating head, stacker
- Crane / Spreader / Slings
- Clamp Truck
- Other grippers : grappling hook / telescopic...

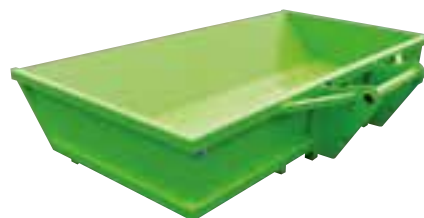





PRACTICAL GUIDE

UNDERSTANDING OUR TECHNICAL DIAGRAMS

Glossary :

- A : overall depth
- B : interior depth
- C : interior depth
- I : interior width
- D : overall height
- D¹ : interior height
- E : maximum loading height
- K : overall height (when emptying)
- F : fork sleeves spacing

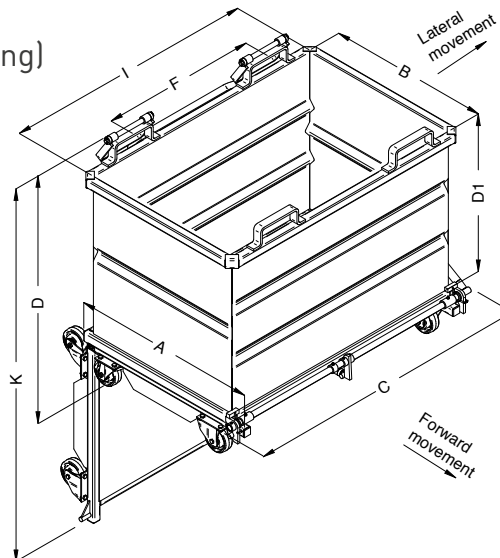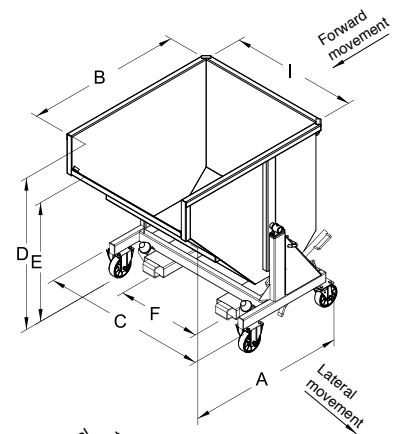



ACCESSORIES

ACCESSORIES

| | | |
|------------------|--|----|
| AM | Muti-function hitching | 67 |
| AT | Trailer for forklift trucks | 66 |
| BP | Pallet tipper | 68 |
| CB | Duct loader | 69 |
| CC | Adjustable rack-system hoist arm | 70 |
| CH | Frame | 72 |
| CHS | Special custom easels | 73 |
| CN | Snow-plow blade | 87 |
| CR-B | Jib for Big-Bag | 74 |
| CR-C | Lifting jib 1 hook | 75 |
| CR-F | Lifting jib | 78 |
| CR-H | Hydraulic spreader for welded wire mesh | 80 |
| CR-T | Jib for welded wire mesh | 79 |
| CRS | Customised lifting accessories | 83 |
| CS-A CS-F | Big-Bag loader | 76 |
| CS-O | Big-Bag loader upper grip | 77 |
| EP | Spur | 82 |
| FQ | Customised forks widener | 71 |
| FR | Fork extension sleeves | 84 |
| MF | Wood bundles trolley | 88 |
| MP | Plasterboard handler | 92 |
| PC | End-of-forks protection | 85 |
| QL | Mobile delivery ramp | 86 |
| RB | Barrel inverter fitted to forklift truck forks | 89 |
| RC | Bin turner bottom grip | 90 |
| RP | Bin turner upper grip | 91 |




TRAILER FOR FORKLIFT TRUCKS


AT

- Safe moving and easily leveling trailer, mobile home, caravan...
- Traffic on private roads.
- Forklift fork grip 1200 length max. in sleeves section int.170x70 – Fork spacing (middle):800mm.
- Compatible with front and telescopic forklift.


Ref. ATP10000

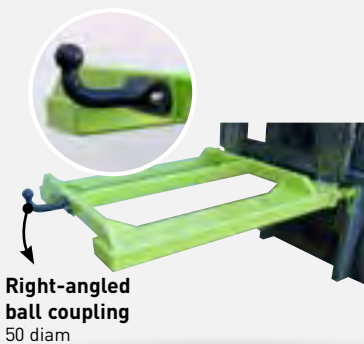

Ref. ATP12000

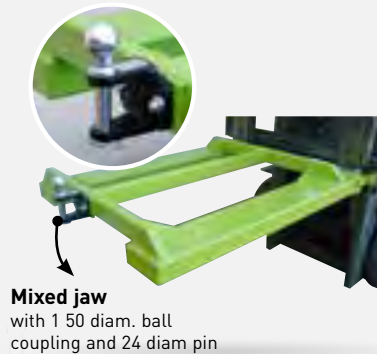

Ref. ATP15000

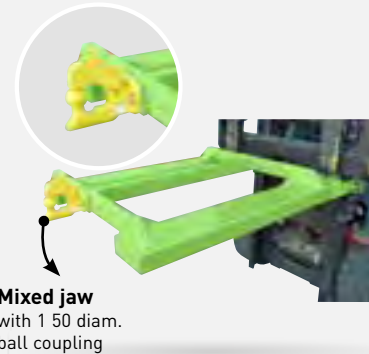

CARACTÉRISTIQUES

Ref. ATP10000


- Model equipped with a right-angled ball coupling
- Enables a wide range of movement
- Vertical static load on the ball : Max. 120 kg
- Towable weight : Max 2T
- Weight 79 kg

Ref. ATP12000


- Model equipped with a combination jaw pin with one ball coupling
- Can be handled via a coupling ball or ring
- Max. Static vertical load :
 - On the ball coupling : 120 kg
 - On the jaw : 120 kg
- Max. towing weight :
 - On the ball coupling : 1.5T
 - On the jaw : 3.5T
- Weight 80 kg

Ref. ATP15000

- Model equipped with a reinforced mixed hook
- Prized by professionals for its safety and robustness
- Usable for trailers with ring and with coupling head
- The mixed hook with its nippers and coupling allows 2 uses
- Reinforced attachment to the heels of the forks
- Static vertical load on the ball hook: 375 kg
- Maximum towable load on the ball hook: 3T5
- Weight 83 kg

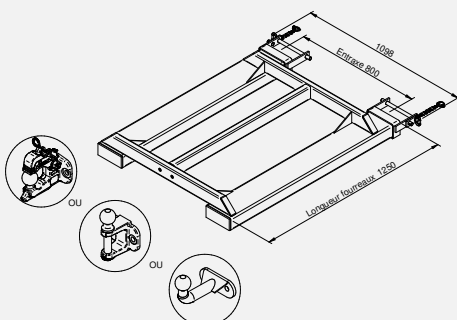

Quick mounting with safety lock at the heels of the forks



Secure hooking with mixed hook


MULTI-FUNCTION HITCHING

AM




- Handles agricultural machinery.
- Fits onto forklift truck forks.
- Three-point towing.

AMP30000 Model FOR CLASS III

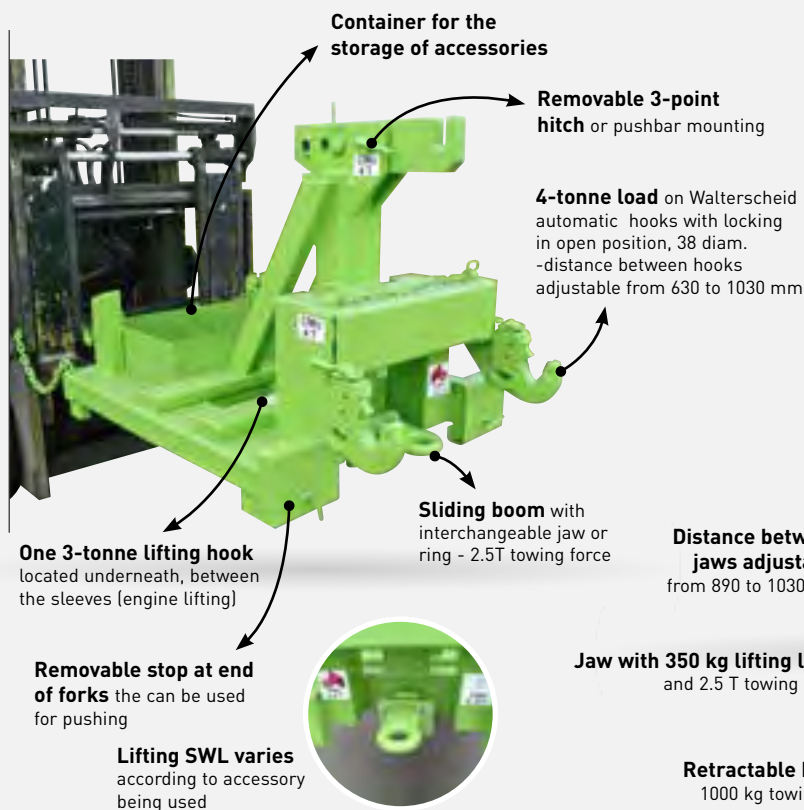

AMP20000 Model FOR CLASS II

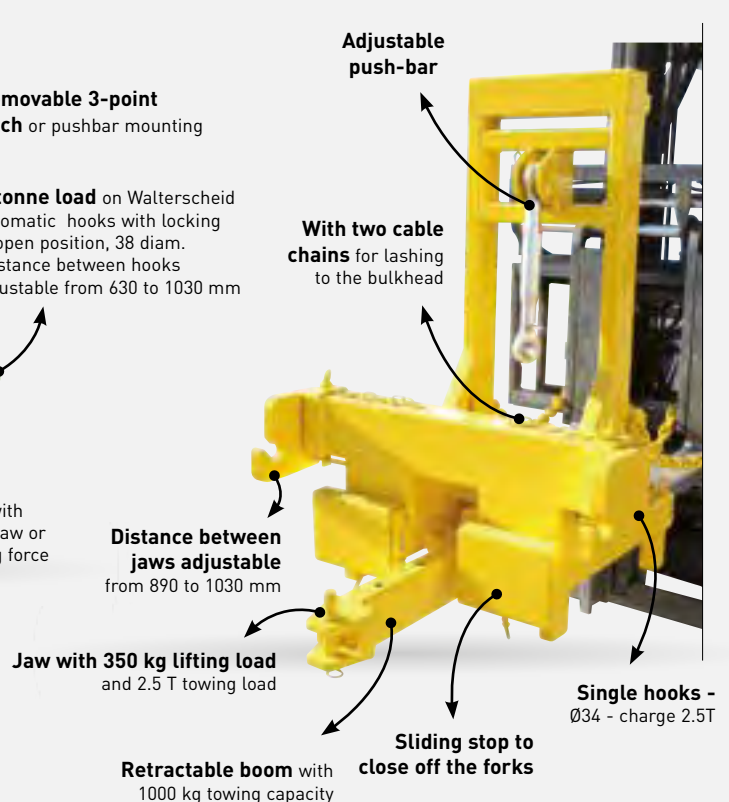

CHARACTERISTICS

2 standard versions AMP20000 and AMP30000

- Forklift truck fork grip
- Three-point towing with hooks and adjustable push bar boom
- Telescopic boom with hook for towing trailer, spreader, etc...
- Type-approved by a regulatory control body
- Options: hydraulic fork grip and removable boom arm

⚠ ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.



PALLET TIPPER




Effortless pallet unloading.
For use with forklift.
Pallet securely held.



CHARACTERISTICS

Patented model - Ref. BPP05000

- Overall dimensions : 580 x 1745 x 465 mm
- Weight 125 kg
- Maximum length of the charge on the pallet : 1100 mm (clearance for the claws)
- Lever for manual tipping
- Fork sleeves aperture : 145 x 55 mm. Spacing : 388 mm
- 2 end-stop limit cables

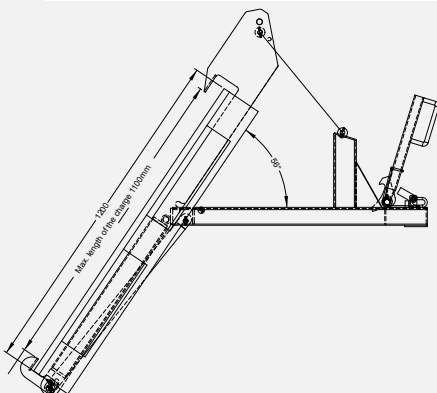

UNLOAD PALLET CONTENTS EFFORTLESSLY (BUNDLED BOXES, PLASTICS, BAGS, ETC.).




DUCT LOADER

CB



Easy to use with forklift.
Transport multiple ducts simultaneously.
Approved by an inspection body.

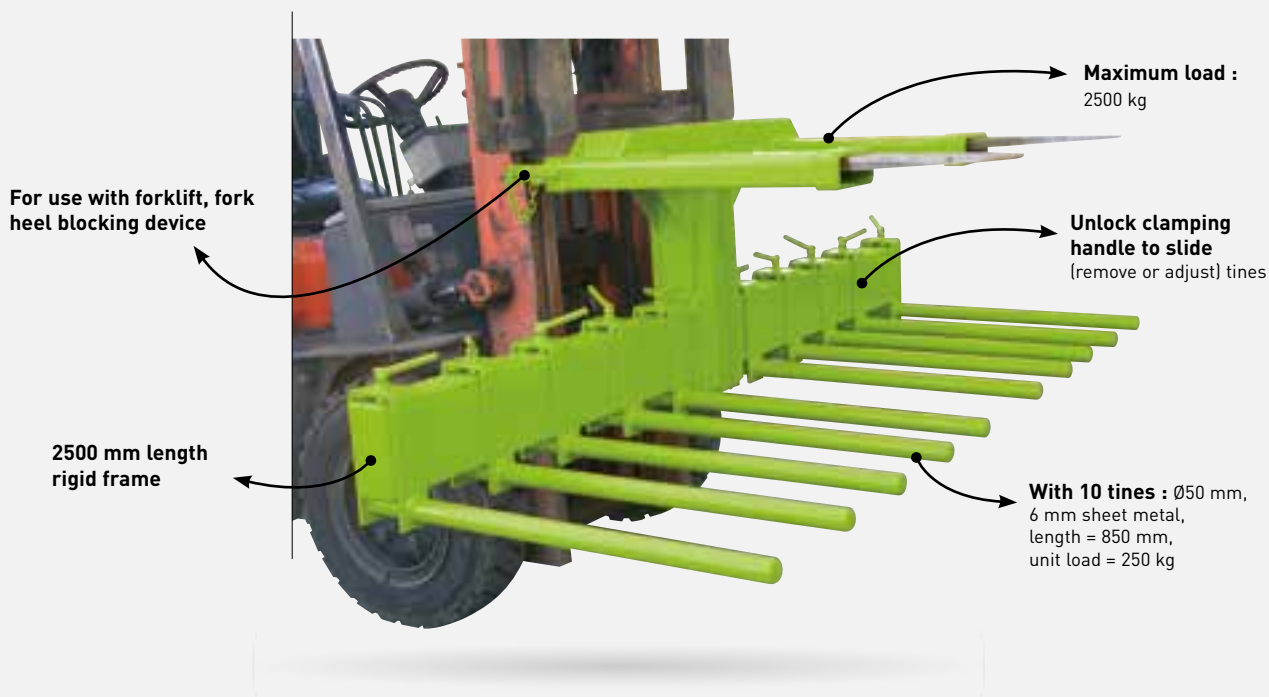

ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

CHARACTERISTICS

Ref. CBP10000

- Maximum load 2500 kg
- Fork sleeves aperture : 170 x 60 mm. Spacing (F) : 760 mm (can be modified on request)
- Load should be evenly distributed over axle
- Weight : 268 kg
- For customised products or specific tine quantity, please contact us.

LOADING 8 $\varnothing 300$ DUCTS




ADJUSTABLE RACK-SYSTEM HOIST ARM


CC

Secure handling of long loads :
piles, metal sheets, timber, bundles, etc.
Type-approved by regulatory body.

Manufactured to request.
Tailor-made to your requirements !

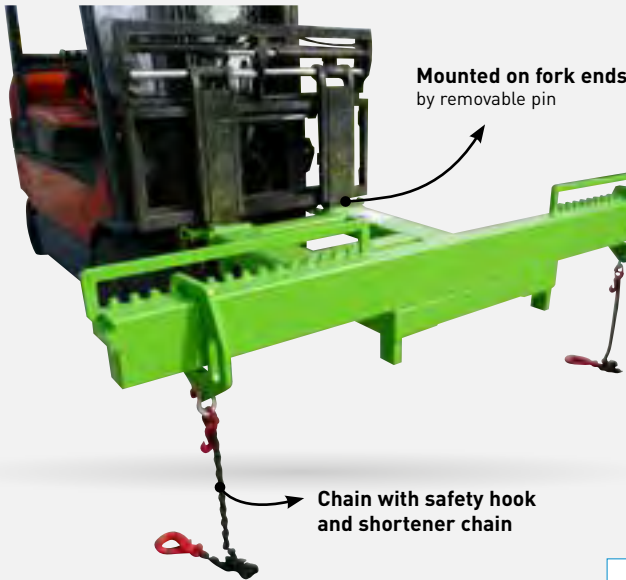

Adjustable side plates on rack

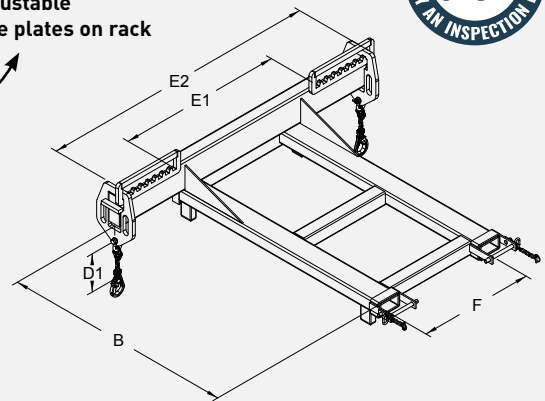

ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.



TABLE TO BE COMPLETED AND SENT TO US FOR A FREE QUOTATION


| Distance from the bulkhead to the hooks (mm) | Min. separation between hooks (mm) | Max. separation between hooks (mm) | Chain length required (mm) | Distance between sleeves (mm) | Forklift capacity (tonne) | Cross-section and length of forklift forks (mm) | Type of load | Dimensions (mm) L x W | Weight of the load (kg) |
|--|------------------------------------|------------------------------------|----------------------------|-------------------------------|---------------------------|---|--------------|--------------------------|-------------------------|
| B | E1 | E2 | D1 | F | | | | | |
| | | | | | | | | | |

This table can be downloaded from the CC page of the website.


CUSTOMISED FORKS WIDENER



Secure handling of long loads: packets sheets, wood etc...
Economical purchase compared to a hydraulic system.
Locking system on the heels of the forks.

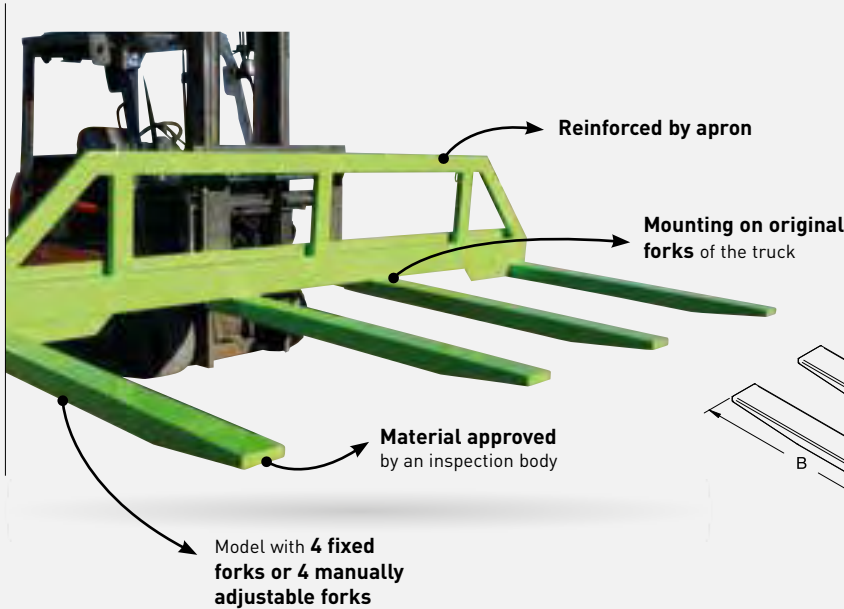

Made to measure.
Send us your technical requirements for achieving customised to suit your needs!

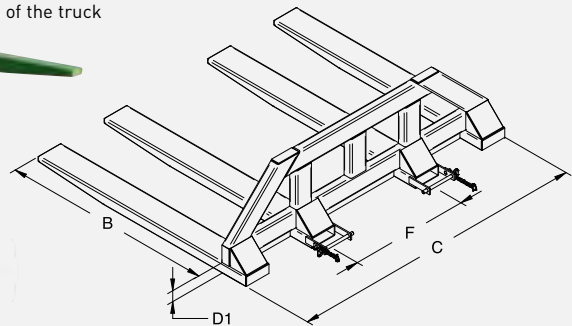

ATTENTION : Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.



TABLE TO COMPLETE AND RETURN TO US FOR A FREE QUOTATION

| Effective length (mm) | Effective Height under pallet (mm) | Overall width (mm) | Max spacing of carriage (mm) | Truck capacity (tonne) | Forks section and length (mm) | Type of load | Dimensions (mm) | Weight Load (kg) |
|-----------------------|------------------------------------|--------------------|------------------------------|------------------------|-------------------------------|--------------|-----------------|------------------|
| B | D1 | C | F | | | | L x W | |
| | | | | | | | | |

Table to download from our website (see FQ page).



For safely handling and transporting joinery, plates, etc.
Approved by inspection authority.
3 models.

Ref. CHP15000

Maximum load 3000 kg

1 central crane loading point ring



Forks inserted into fork sleeves aperture 170 x 70 mm

2 vertical side ramps for fitting slings

Ref. CHP25000

Maximum load 1500 kg

2 cranes loading rings with reinforcement brackets



Total depth 1700 mm

Support side rails and cross-members covered with interchangeable rubber section

Ref. CHP08000

Maximum load 800 kg

1 central crane loading ring with reinforcement brackets



Frame with vertical supports

2 support plates of 1700 mm total depth with anti-slip edge

CHARACTERISTICS

Ref. CHP15000

- Easel with inclined supports
- Support side rails and cross-members covered with interchangeable rubber section
- Special manufacturing on request

Ref. CHP25000

- Easel with inclined supports
- Forklift uses lower loops with 200 x 80 mm apert. and spacing (F) can be changed on request
- 2 vertical side ramps for fitting slings


Ref. CHP08000

- Forklift uses lower loops with 200 x 80 mm apert. and spacing (F) can be changed on request
- Cross-members covered with interchangeable rubber section
- 4 side loops for slings



Handling truck

- Reinforced frame on 4 wheels (2 fixed + 2 pivoting with brake Ø 160 alu/polyurethane or 200 iron/polyurethane for CHP16202) to move the loaded frame easily
- Handling truck Ref. CHP18161 for CHP08000
- Handling truck Ref. CHP16161 for CHP25000
- Handling truck Ref. CHP16202 for CHP15000

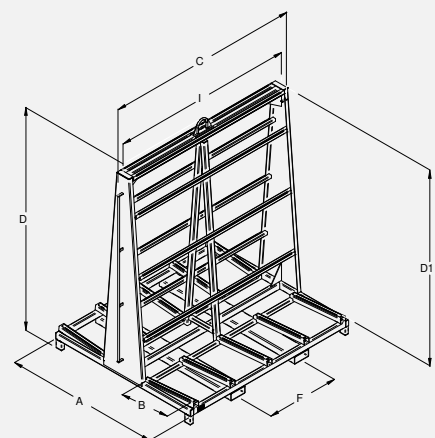

| Load kg | A | B | C | I | D | D1 | F | Fork sleeves ins. | Weight kg | Painted ref. |
|---------|------|-----|------|------|------|------|-----|-------------------|-----------|--------------|
| 800 | 1200 | 560 | 2330 | 2210 | 2400 | 2100 | 800 | 200 x 80 | 175 | CHP08000 |
| 1500 | 1700 | 600 | 2120 | 2000 | 2430 | 2130 | 800 | 200 x 80 | 215 | CHP25000 |
| 3000 | 1700 | 580 | 2120 | 2000 | 2430 | 2130 | 800 | 170 x 70 | 305 | CHP15000 |

Dimensions in mm for basic model (for guidance only).


SPECIAL CUSTOM EASELS



Send us your technical requirements and we will make the easel to fit!

Security, comfort, efficiency.
Easel with forks grip or crane grip.
Loading and transport in security.

Storage facility.
Easy handling for wood frame panels,
woodworking, metal, glass...

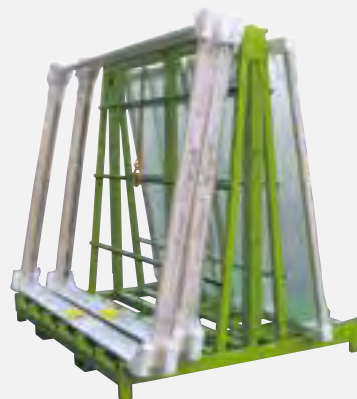

LIFTING CROSS FOR BIG-BAG



Secure handling.
Approved by a control organization.
2 models.


ATTENTION : Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.



CROSS LIFTING BY CRANE

Cleats restraint
straps (height 100 mm)

Maximum load :
1700 kg

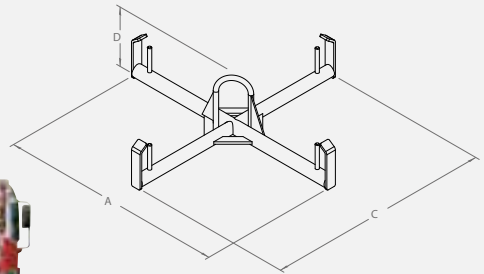

CHARACTERISTICS

Ref. CRP40000

- For loading and unloading bigbag with crane truck or handling hoist
- Manufacturing in round tube \varnothing 45 mm
- For custom designed products, contact us



| Load kg | A | C | D | Weight kg | Painted ref. |
|---------|-----|-----|-----|-----------|--------------|
| 1700 | 915 | 915 | 230 | 18 | CRP40000 |

Dimensions in mm for basic model (for guidance only).

LIFTING FORKS GRIP

Ref. CRP50000
4 hooks
with safety latch

Ref. CRP51000
4 hooks
with quick release

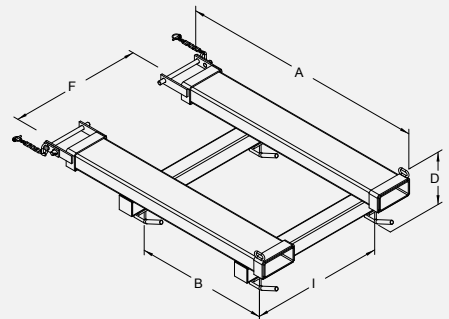

Maximum load :
2000 kg

CHARACTERISTICS

REF. CRP50000 & CRP51000

- Direct mounting on forks with fork heel locking device
- Fork sleeves 170 x 70 mm and fork spacing [F] can be modified on request

| Load kg | A | B | C | I | D | F | Weight kg | Painted ref. |
|---------|------|-----|------|-----|-----|-----|-----------|--------------|
| 2000 | 1300 | 700 | 1000 | 700 | 250 | 700 | 80 | CRP50000 |
| 2000 | 1300 | 700 | 1000 | 700 | 280 | 700 | 80 | CRP51000 |

Dimensions in mm for basic model (for guidance only).

LIFTING JIB

1 HOOK





Quickly transforms your forklift into a lifting device.
 Quick mounting on forks.
 Approved by an inspection body.
 2 models.

! ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.





Ref. CRP20000

Maximum load 3000 kg

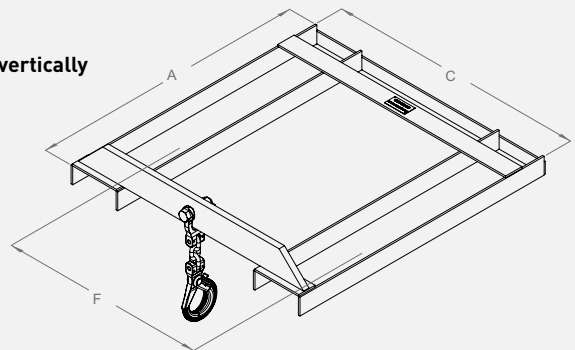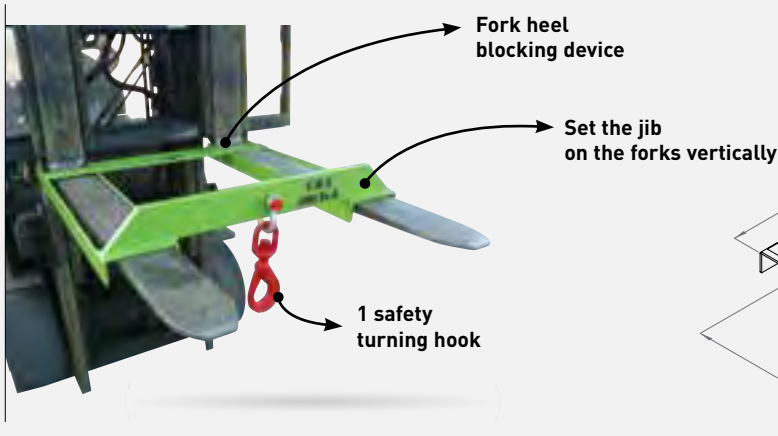

Ref. CRP25000

Maximum load 5000 kg

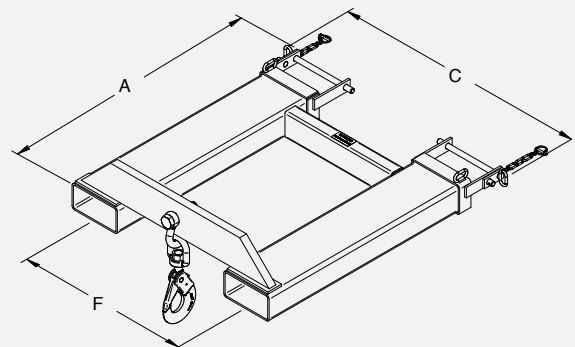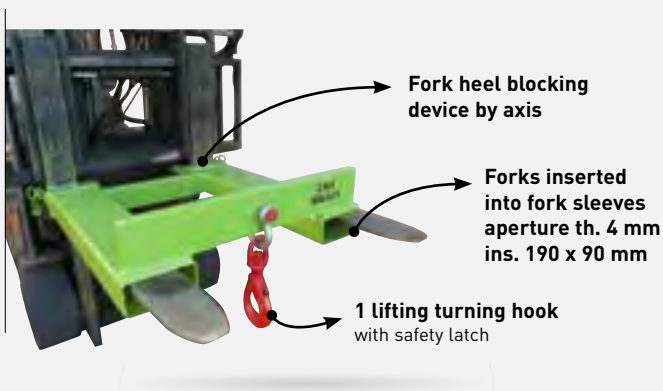

| Load kg | A | C | F | Fork sleeves ins. | Weight kg | Painted ref. |
|---------|------|-----|-----|-------------------|-----------|--------------|
| 3000 | 915 | 845 | 670 | 160 x 60 | 30 | CRP20000 |
| 5000 | 1045 | 985 | 670 | 190 x 90 | 75 | CRP25000 |

Dimensions in mm for basic model (for guidance only).

BIG-BAG LOADER





For transporting Big-Bags.
Direct mounting on forks of forklift truck.
Approved by an inspection body.

ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

MODEL CS-A

With or without hooks versions


Bar ext. Ø : 118 mm
Effective length : 1.70 m

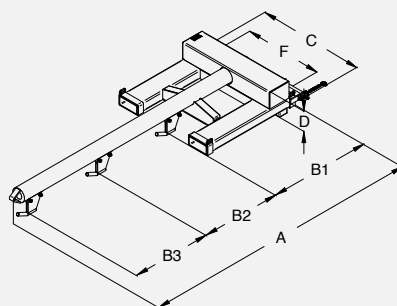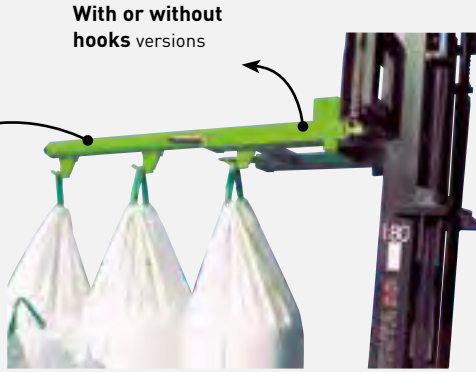

MODEL CS-F

Forward loading
2 hooks

Load 2 x 1T



CHARACTERISTICS

- Maximum load 2000 kg
- 1 Fork heel blocking device
- Fork sleeves aperture and spacing (F) can be modified on request
- For customised products, please contact us

Model CS-A

| Nber hooks | Load kg | A | B1 | B2 | B3 | C | D | F | Fork sleeves ins. | Weight kg | Painted ref. |
|------------|----------|------|-------------------|------|-----|-----|-----|-----|-------------------|-----------|--------------|
| 0 | 2000 | 2520 | Bar without hooks | | | 950 | 235 | 700 | 170 x 70 | 227 | CSP20000 |
| 2 | 2 x 1000 | 2520 | 955 | 1050 | - | 950 | 290 | 700 | 170 x 70 | 230 | CSP22000 |
| 3 | 3 x 660 | 2520 | 780 | 700 | 700 | 950 | 290 | 700 | 170 x 70 | 235 | CSP23000 |

Dimensions in mm for basic model (for guidance only).

Model CS-F

| Load kg | A | I | D | F | Fork sleeves ins. | Weight kg | Painted ref. |
|----------|------|-----|-----|-----|-------------------|-----------|--------------|
| 2 x 1000 | 1370 | 800 | 250 | 380 | 170 x 70 | 77 | CSP52000 |

Dimensions in mm for basic model (for guidance only).


BIG-BAG LOADER UPPER GRIP




Safe handling of Big-Bags.
Direct mounting on forks.
2 models with 1 or 2 hooks.
Approved by an inspection body.

ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

Ref. CSP31000 Load 1T on 1 hook



Ref. CSP32000 Load 2T on 2 hooks

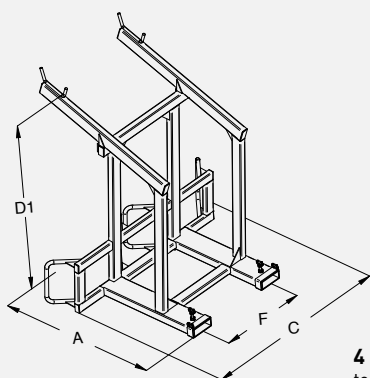

| Load kg | A | C | D1 | 1200 fork CG | Fork sleeves ins. | F | Weight kg | Painted ref. |
|---------|------|------|------|--------------|-------------------|-----|-----------|--------------|
| 1T | 1310 | 890 | 1570 | 605 | 165 x 55 | 700 | 102 | CSP31000 |
| 2 x 1T | 1310 | 1580 | 1570 | 626 | 165 x 55 | 700 | 137 | CSP32000 |

Fork sleeves aperture and spacing [F] can be modified on request - Dimensions in mm for basic model (for guidance only).


LIFTING JIB



**Quick mounting on forks.
Approved by an inspection body.
2 models.**

ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

LIFTING JIB

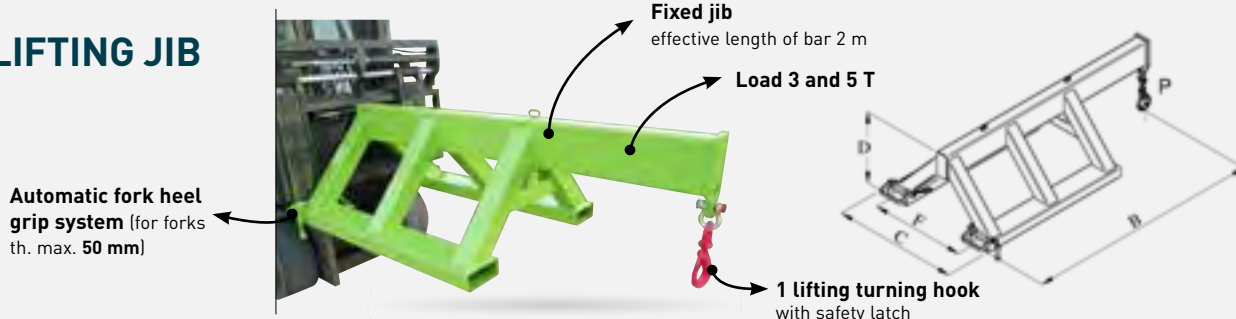


CHARACTERISTICS

**Ref. CRP31300 – 3T
Ref. CRP31500 – 5T**
— Raised beam to save lifting height

| Load kg | B | C | D | F | Fork sleeves ins. | Weight kg | Painted ref. |
|---------|------|------|-----|-----|-------------------|-----------|--------------|
| 3000 | 2000 | 1060 | 615 | 800 | 192 x 112 | 160 | CRP31300 |
| 5000 | 2000 | 1080 | 615 | 800 | 192 x 112 | 181 | CRP31500 |

Dimensions in mm for basic model (for guidance only).

ADJUSTABLE LIFTING JIB

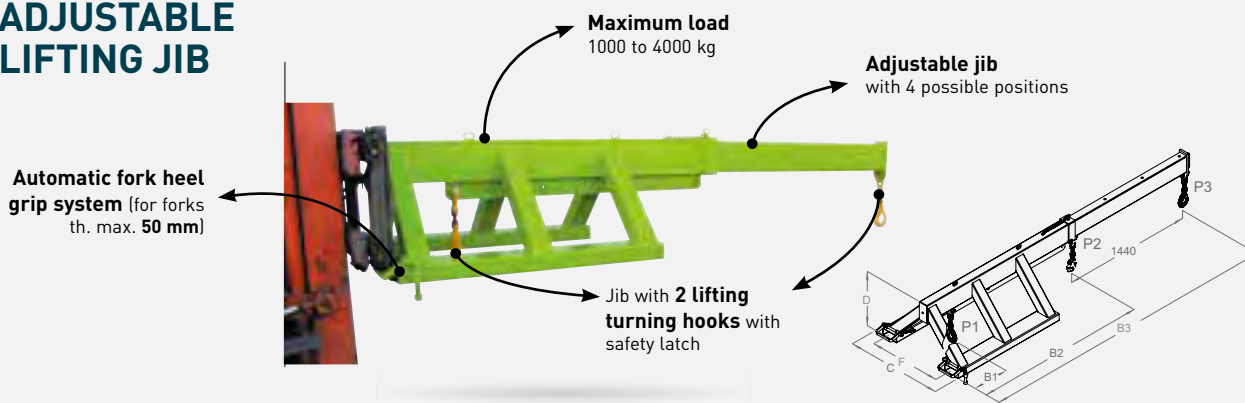

CHARACTERISTICS

Ref. CRP30000
— Adjustable jib : 1960 to 3400 mm
— Maximum load : 1000 to 4000 kg (see table for details)
— Check forklift capacity and suitability before use

| B1 | B2 | B3 | C | D | F | Fork sleeves ins. | Weight kg | Painted ref. |
|-----|------|------|------|-----|-----|-------------------|-----------|--------------|
| 395 | 1960 | 3400 | 1060 | 635 | 800 | 170 x 70 | 216 | CRP30000 |

| Maximum load in kg | | | | |
|--------------------|------------|------------|-----------------------------------|------------------|
| On 1 hook | | | Evenly distributed across 2 hooks | |
| Position 1 | Position 2 | Position 3 | Position 1 and 2 | Position 1 and 3 |
| 3000 | 2000 | 1000 | 4000 | 2000 |


Dimensions in mm for basic model (for guidance only).

JIB FOR WELDED WIRE MESH

CR-T



Safe and user-friendly handling of welded wire mesh.
Approved by an inspection body.

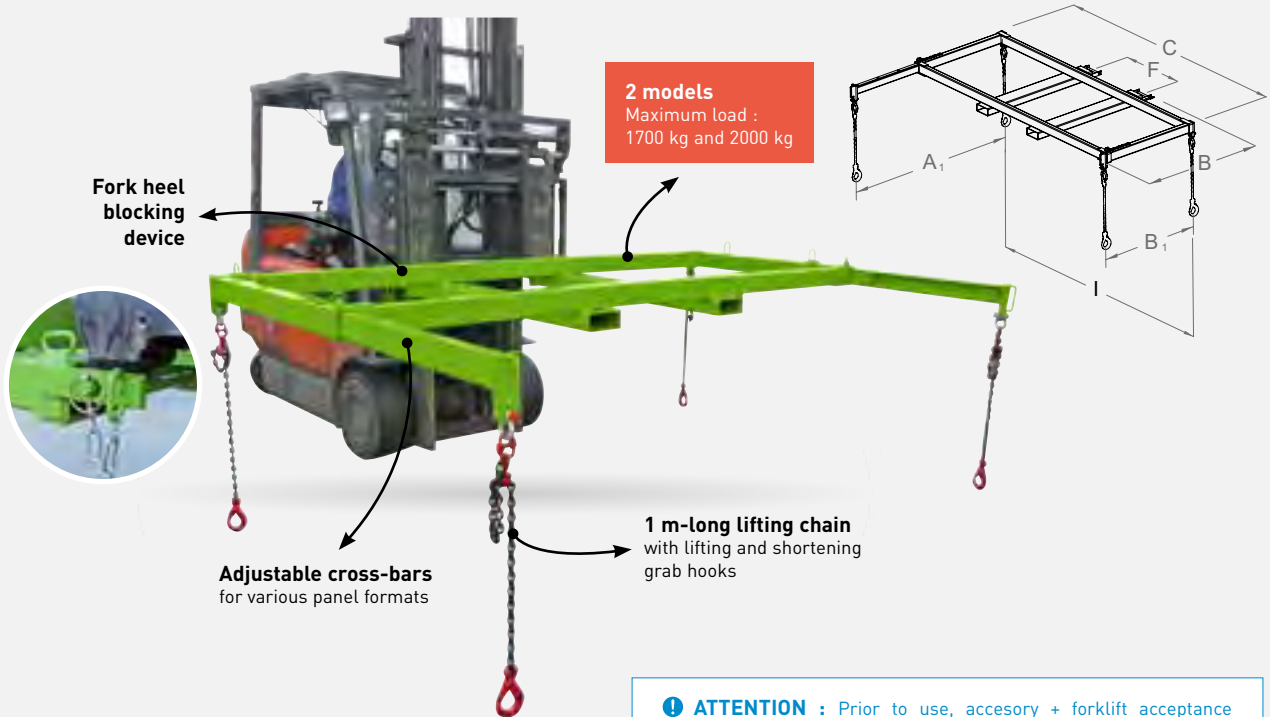

! ATTENTION : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.



CHARACTERISTICS

- Maximum load : 1700 kg and 2000 kg
- Jib width : 3000 mm
- 2 adjustable cross-bars : 1200 to 2000 mm with latch (4 fixed positions)
- Fork sleeves aperture: 170 x 70 mm in 5 mm sheet metal. Spacing : see F in table. Can be modified on request




| Load kg | B1 | B | A1 | C | I | F | Fork sleeves ins. | Weight kg | Painted ref. |
|---------|------|------|------|------|------|-----|-------------------|-----------|--------------|
| 1700 | 1170 | 1500 | 2000 | 3080 | 3000 | 800 | 170 x 70 | 207 | CRP17000 |
| 2000 | 1170 | 1500 | 2000 | 3080 | 3000 | 800 | 170 x 70 | 245 | CRP27000 |

Dimensions in mm for basic model (for guidance only).

HYDRAULIC SPREADER FOR WELDED WIRE MESH



- Quick and secure unloading of trucks.
- Can handle piles.
- Type-approved by regulatory body.

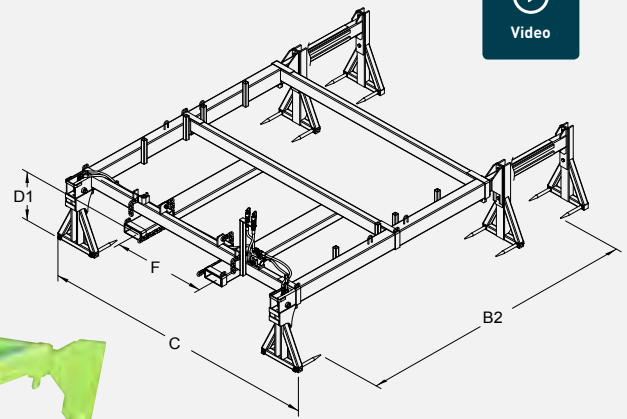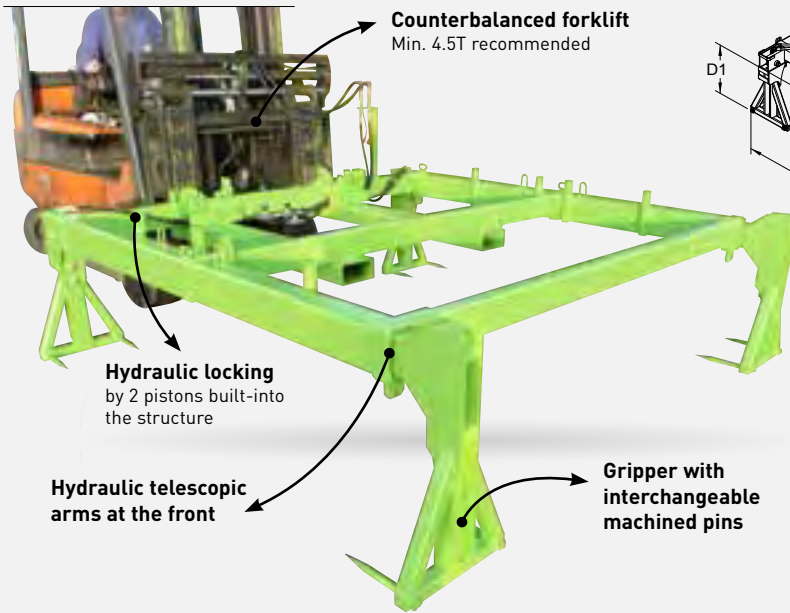

! ATTENTION :

Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

! The most popular model !

The versatile CRP57000 model can move all types of stacks, but for loads longer than 4.80 m, careful of bending when stacking !

! Can accommodate large sizes

The CRP77000/CRP780000 is used to load, unload and stack piles longer than 4.80 m. Only the CRP78000 can sometimes hold loads longer than 3.6 m in length.

CHARACTERISTICS

- Permissible weight 2000 kg
- Can be fitted to counterbalanced or telescopic forklift truck forks
- Enables 2.40 m wide piles to be handled (for special 2 m width select the RGP option) and 2 to 6 m long piles, depending on the references
- Supplied with hoses fitted with 3/8 male couplings mounted fitted on support
- Remains securely fitted to the forklift truck by 12 mm diam. chains
- Delivered disassembled with 4 claws to bolt

| For forklift | Recommended wire meshing | B2 | C | D1 | F | Fork sleeves ins. | Weight kg | Painted ref. |
|-----------------|--------------------------|------|------|-----|-----|-------------------|-----------|--------------|
| Counterbalanced | Length from 2 to 4.80 m | 2665 | 2695 | 460 | 900 | 170 x 70 | 490 | CRP57000 |
| | Length from 3.60 to 6 m | 2665 | 3895 | 430 | 900 | 170 x 70 | 670 | CRP78000 |
| | Length from 4.80 to 6 m | 2665 | 3895 | 430 | 900 | 170 x 70 | 590 | CRP77000 |
| Telescopic | Length from 2 to 4.80 m | 2665 | 2695 | 460 | 900 | 170 x 70 | 470 | CRP67000 |
| | Length from 4.80 to 6 m | 2665 | 3895 | 430 | 900 | 170 x 70 | 550 | CRP87000 |

Dimensions stated in mm, excluding options, and not contractually binding.



Locked by 2400 mm end stops




8 machined pins to be able to get under the stack

OPTIONS

AND FUNCTIONS OF USE

CRP78000 model with 3-pin stand
for very long welded wire mesh

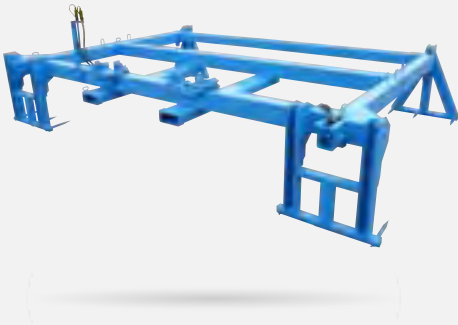

CRP67000
telescopic forklift truck sleeves



Hydraulic assembly
with adjustment for telescopic arm




OPTIONS

- Quick and secure unloading of Adaptation for 4-forks truck
- **ELP** : 4 1m-lifting chains with safety and grab hooks (for retail outlet mesh, manual use as CR-T)
- **RGP** : Set of 4 extendable claws for special size 2m wire mesh, can be fitted on CRP57000 and CRP67000

ELP Option
4-chain lifting kit



RGP Option
Gripper reduction kit

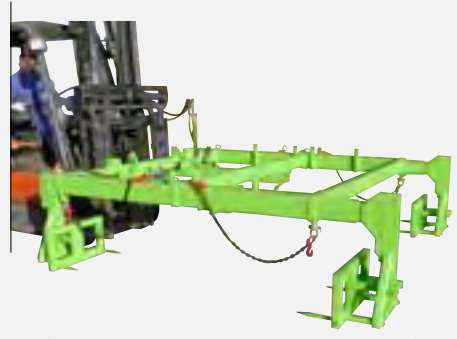

Quick and secure unloading of lorries




SPUR


EP



For transporting carpet rolls, fabric, paper, etc.
Easy to use with forklift.
2 models.

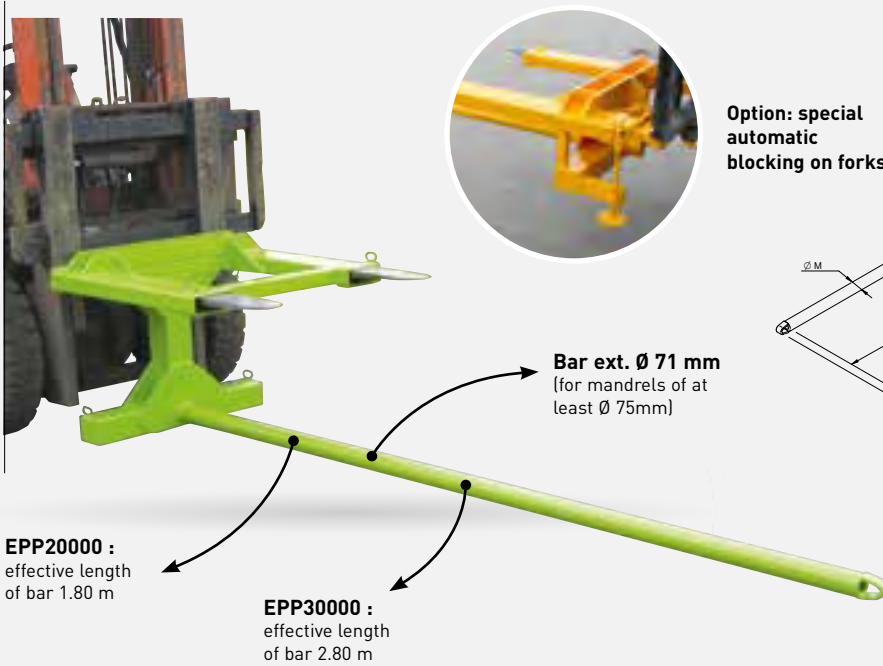

Option: special automatic blocking on forks

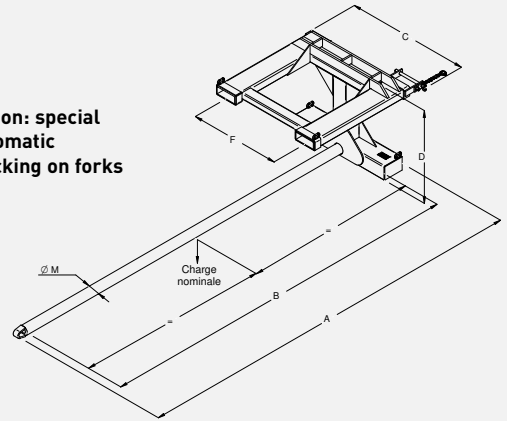

ATTENTION : Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.

CHARACTERISTICS

- Safety by 1 fork heel blocking device
- Fork sleeves aperture and spacing (F) can be modified on request
- For customised products, please contact us
- Approved by an inspection body

| Load kg | A | C | D | F | Fork sleeves ins. | Weight kg | Painted ref. |
|---------|------|-----|-----|-----|-------------------|-----------|--------------|
| 600 | 2200 | 930 | 715 | 700 | 155 x 55 | 137 | EPP20000 |
| 400 | 3200 | 930 | 715 | 700 | 155 x 55 | 160 | EPP30000 |

Dimensions in mm for basic model (for guidance only).

TABLE TO BE COMPLETED AND SENT TO US FOR A FREE QUOTATION

| Effective length required (mm) (mini 3/4 Lg load) | Length of the load (mm) | Outer diameter of the load (mm) | Inside diameter of the load (mm) | Type of load | Weight Load (kg) | Spacing of carriage (mm) | Forks section and length (mm) | Truck capacity (tonne) |
|---|-------------------------|---------------------------------|----------------------------------|--------------|------------------|--------------------------|-------------------------------|------------------------|
| B | | | M | | | F | | |
| | | | | | | | | |

This table can be downloaded from the EP page of the website.





CUSTOMISED LIFTING ACCESSORIES HOOK/SPUR/BEAM

CRS

Send us your technical requirements and we will make the lifting accessory to fit!

Approved by inspection authority.
Safely handles all loads (bigbag, rollers, coils, nozzles, panels, parts, sheeting, netting, etc.).
Easily mounted on forks.
With safety locking mechanism on fork heel.


⚠ ATTENTION : Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.

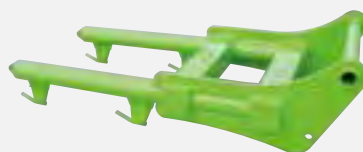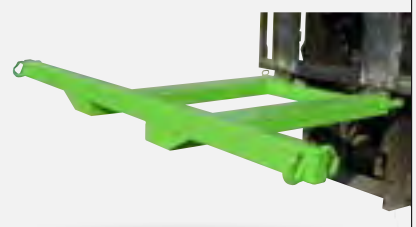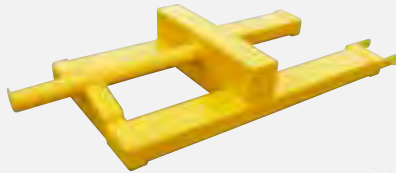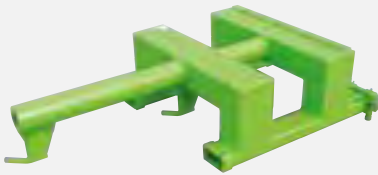

FORK EXTENSION SLEEVES

FR

Quick and secure fit.
Reinforced fork sleeves in th. 5 mm.
Length according to the ISO 13284 standard.

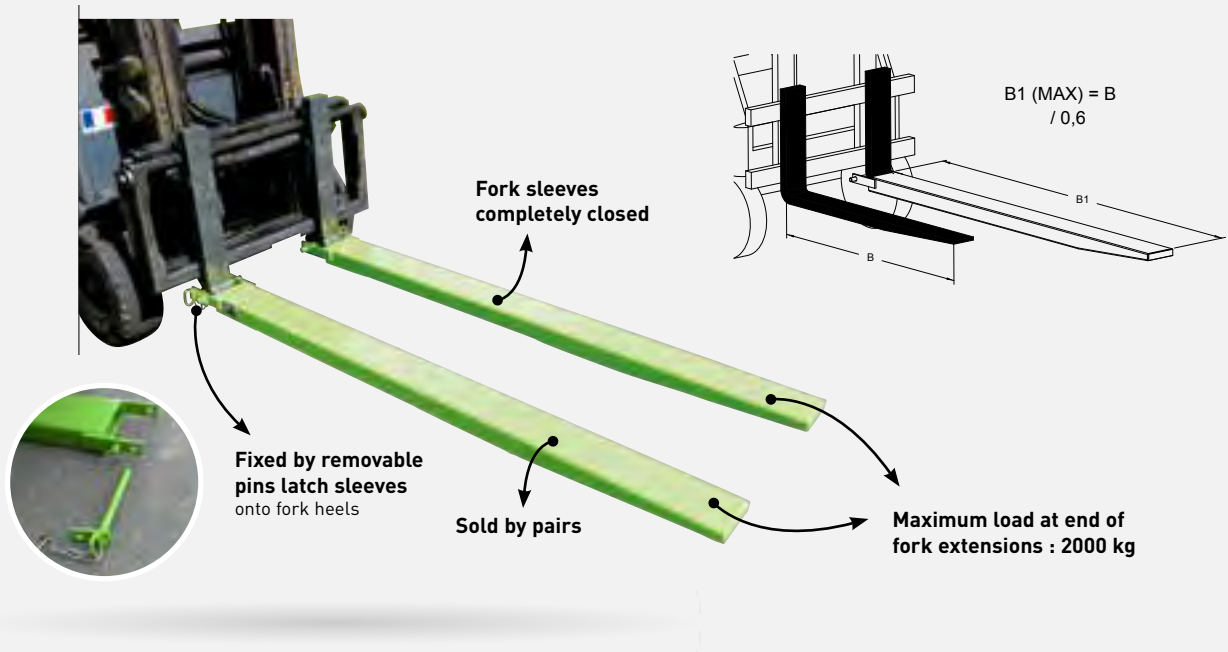

Check the available space behind your fork heel



Forks can enter the sleeves directly



Reinforced fork sleeves th. 5 mm

CHARACTERISTICS

- Select model based on fork dimensions (W x H x L)
- According to the ISO 13284 Standard length extensions must conform to the following formula : Maximum length of extension (B1) = Length of the original truck forks (B) / 0.6
- For customised fork sleeves with other dimensions, please contact us


| Max. fork dimensions | Extension sleeve aperture FR | Length (mm) B1 | Weight kg | Painted ref. (pair) |
|----------------------|------------------------------|----------------|-----------|---------------------|
| 40 x 80 | 50 x 100 | 1500 | 38 | FRP10015 |
| 45 x 100 | 55 X 120 | 1700 | 49 | FRP12017 |
| | 55 X 120 | 2000 | 58 | FRP12020 |
| 45 x 125 | 60 x 145 | 1700 | 57 | FRP14517 |
| | 60 x 145 | 2000 | 67 | FRP14520 |
| 50 x 150 | 65 x 170 | 2000 | 77 | FRP17020 |

Dimensions in mm for basic model (for guidance only).

END-OF-FORKS PROTECTION

PC

Forks protected during movements of forklift trucks when unladen, on traffic lanes.
Safety guaranteed.

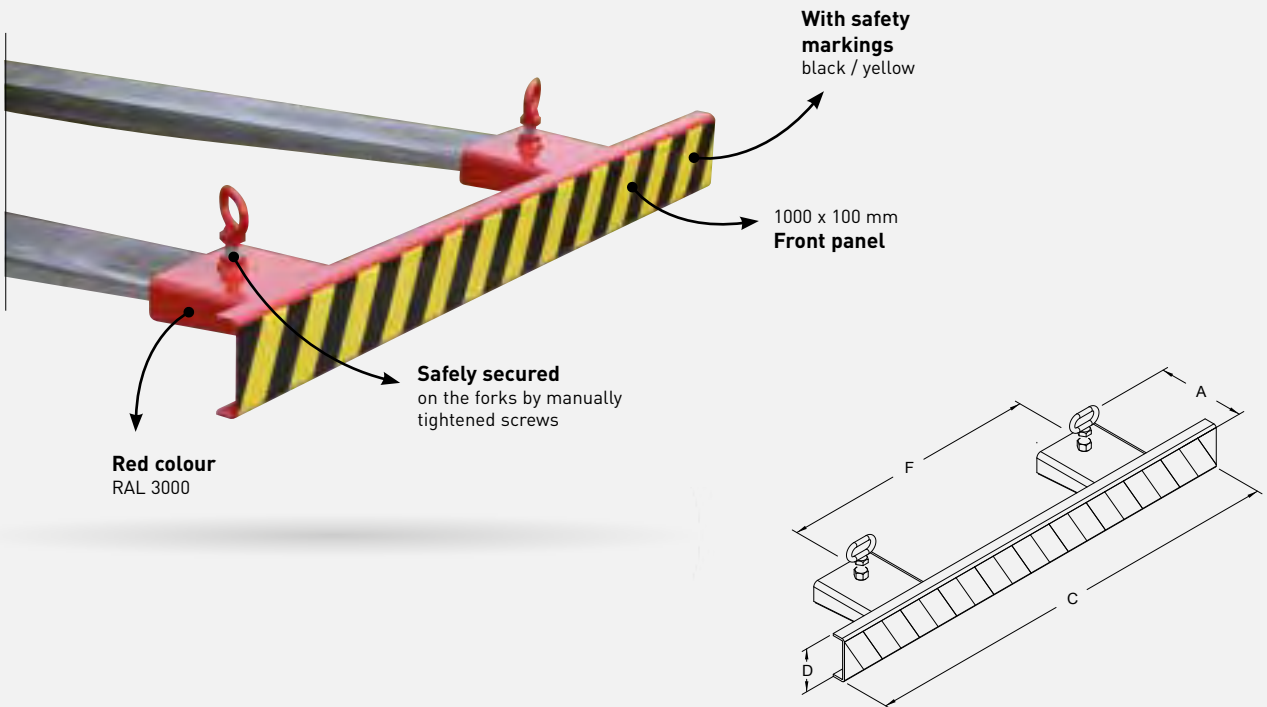

CHARACTERISTICS

- Sleeve inlet cross-section of 145 x 40 mm and distance between sleeves (F) can be adjusted on request
- Robust construction, 5 mm thick
- Other dimensions can be made-to-measure : talk to us


| A | C | D | F | Fork sleeves ins. | Weight kg | Painted ref. |
|-----|------|-----|-----|-------------------|-----------|--------------|
| 205 | 1000 | 100 | 600 | 145 x 40 | 12 | PCP10000 |

Dimensions in mm for basic model (for guidance only).

MOBILE DELIVERY RAMP

QL

Quick and secure unloading of pallets of materials at sites where access is difficult. Forklift grip + pallet lift.

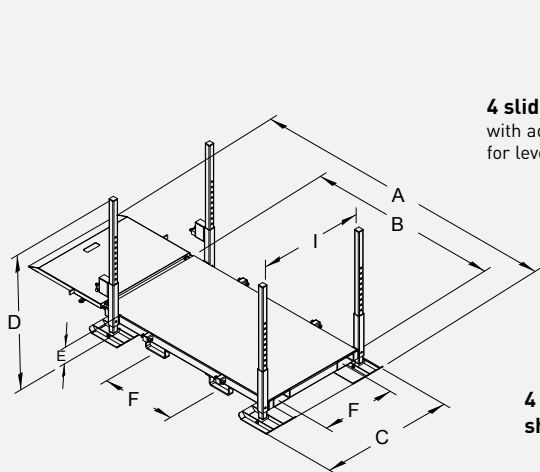

4 sliding feet
with adjustable base
for levelling

Articulated platform and ramp lockable,
made from 3/5
teardrop plate
panel (anti-slip)

4 adjustable shoes

Permissible load
2000 kg

Lifting loops section
section 200x80 ins.

! Use

- The ramp enables you to pass above ground drainage or trenches and compensate for uneven ground.
- It enables a pallet to be delivered to a garage or enclosed area.
- Unload, wherever you wish, in spite of difficult to access sites or sites that are difficult to move around.
- Once the platform is stabilised, remove your pallet with your pallet lift/truck cranes.
- Unload using your pallet truck.

| Load kg | A | B | C | I | D | E | F | Fork sleeves ins. | Weight kg | Painted ref. |
|---------|------|------|------|-----|------|-----|-----|-------------------|-----------|--------------|
| 2000 | 2790 | 1800 | 1260 | 980 | 1300 | 190 | 700 | 170 x 70 | 270 | QLP20000 |

Dimensions in mm for basic model (for guidance only).



- Unloading by
pallet lift
- 4 lashing points
for ratchet-straps



Pallet is
positioned
on the ramp




Pallet unloaded
at difficult
to access site



Can be moved
unladen with forklift
in 170 x 70
sleeves, set
distance between
arms of 700 mm



Stabilised by
adjustable feet
every 50 mm




Can also be made
with 2 removable
mesh drop panels and
1 steel-panel bottom

SNOW-PLOW BLADE

CN

- Metal or rubber blade interchangeable.
- Easy to use with forklift.
- Quick and efficient snow clearance.

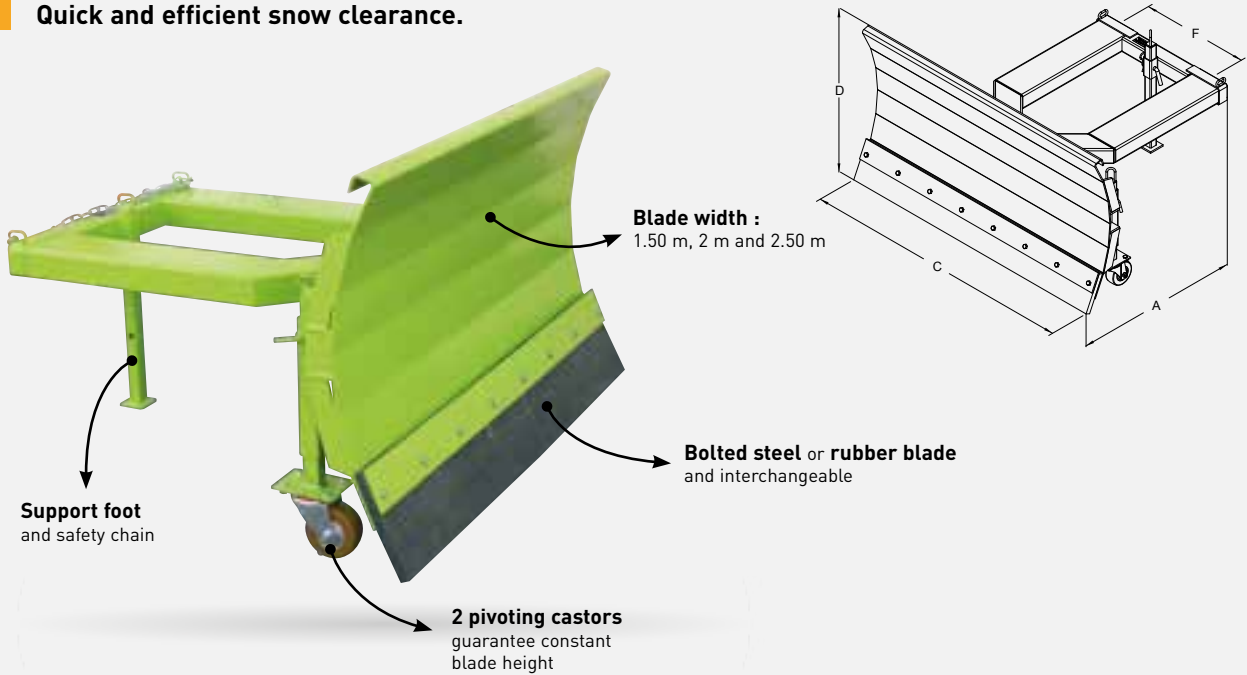

CHARACTERISTICS

2 MODELS :

- With highly-resistant rubber scrapper (65 shores), 2 pivoting castors guarantee constant blade height. Prevents ground damage when clearing snow. Blade height (D) 825 mm
- With bolted steel blade (400 HB), can be uses throughout the year for leveling, clearing or cleaning surfaces
- Blade height (D) 800 mm

| Length blade mm (C) | Castors Ø | A | F | Fork sleeves ins. | Weight kg | Steel blade ref. | Rubber blade ref. |
|---------------------|-----------|------|-----|-------------------|-----------|------------------|-------------------|
| 1500 | - | 1270 | 600 | 170 x 70 | 180 | CNP15000 | - |
| 1500 | 125 | 1270 | 600 | 170 x 70 | 190 | CNP15121 | CNP16121 |
| 2000 | - | 1270 | 600 | 170 x 70 | 215 | CNP20000 | - |
| 2000 | 125 | 1270 | 600 | 170 x 70 | 225 | CNP20121 | CNP21121 |
| 2500 | - | 1270 | 600 | 170 x 70 | 250 | CNP25000 | - |
| 2500 | 125 | 1270 | 600 | 170 x 70 | 260 | CNP25121 | CNP26121 |

Dimensions in mm for basic model (for guidance only).



WOOD BUNDLES TROLLEY

MF

For transporting bundles of timber slabs.

Fagot can be directly forklifted.

Maximum load : 1200 kg.

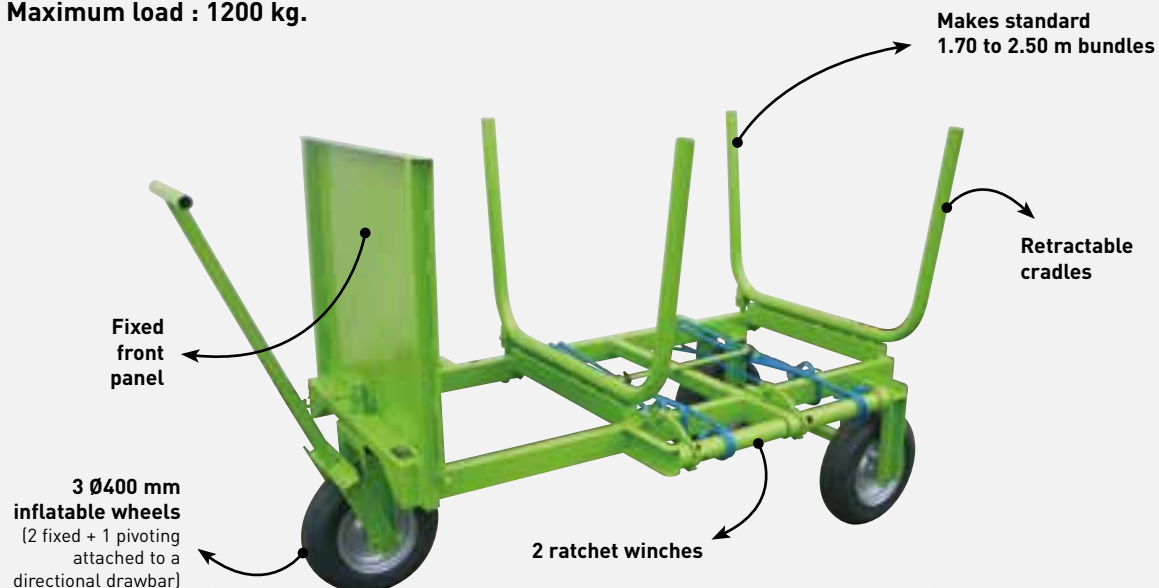

CHARACTERISTICS

Ref. MFP18004

- Interior cradle dimensions : 910 x 700 mm
- Chassis length : 1700 mm
- Weight 130 kg
- For customised products (alternate chassis length, fixed cradle, with or without winch, etc.), please contact us



BARREL INVERTER

FITTED TO FORKLIFT TRUCK FORKS

RB

For standard metal barrels, 572 mm in diam.
 For handling, transportation and controlled draining of barrels.
 3 models.

CHARACTERISTICS


COMMON TO THE 3 MODELS :

- Permissible load 350 kg
- Fork grip in sleeves with a int. cross-section of 170 x 70 mm
- Fork end grip safety system with removable pin
- Barrel is held in position by articulated steel belt and adjustable eccentric closure with safety pin
- 360 degree rotation with stops in all positions
- Options on RBP20000 : remote control by chain steering wheel, special distance between forks, different barrel diameters (on request) depending on options


Ref. RBP30000

Lower centre-section grip tilter - Weight 80 kg

Tilted by reduction gearing
 (20 turns of the hand-wheel to move 90 degrees) with automatic braking system

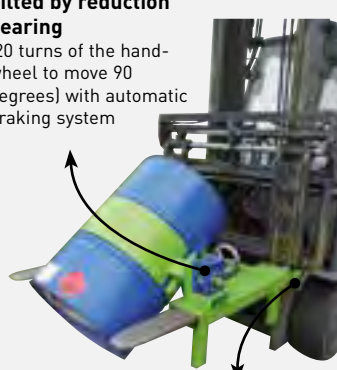

Safety system on fork end
 provided by removable pin

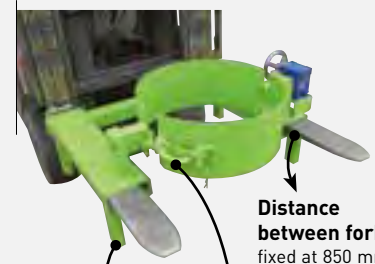

Height of feet adapted to the central and vertical grip of the barrel

Adjustable eccentric closure

Distance between forks
 fixed at 850 mm


Ref. RBP20000

Upper grip inverter - Weight 130 kg



Ref. RBP10000

Barrel inverter for rotating head forklift - Weight 70 kg

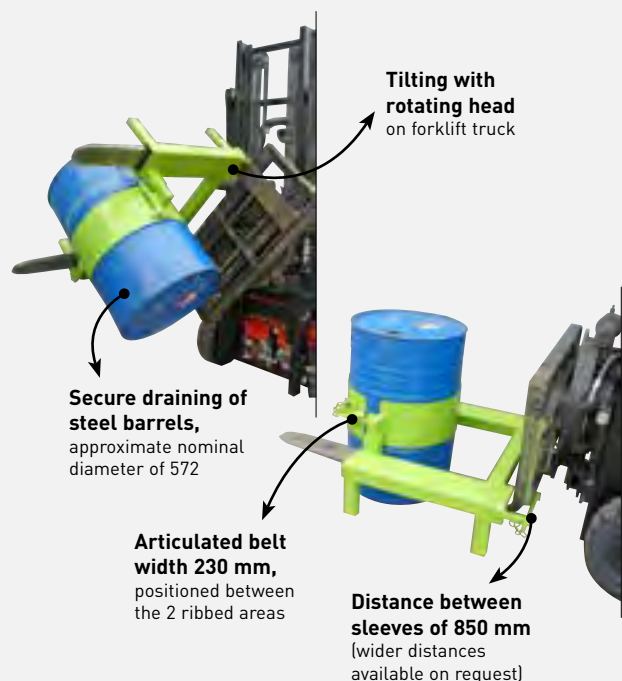

BIN TURNER

BOTTOM GRIP

RC

Perfect for reduced lift height.
Bottom scoop by forks.
Calibrated for your bins.
Max. load 500 kg.




Video



! INFORMATION REQUIRED FOR FEASIBILITY

Please indicate : The dimensions of your case, the section and length of the forks of your forklift truck (plan below to complete).

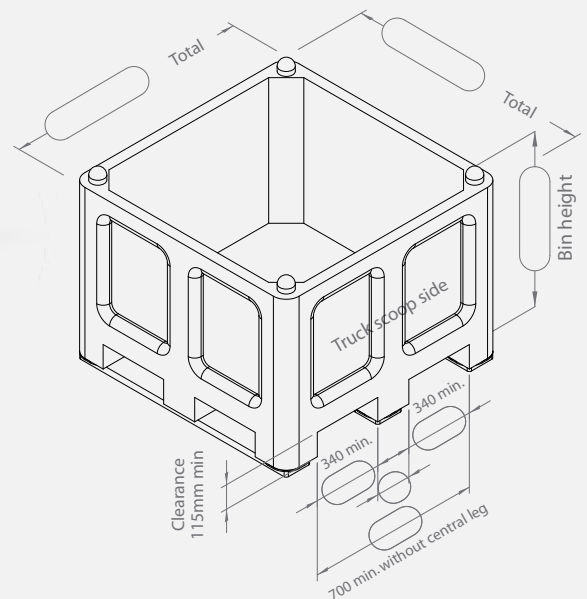

CHARACTERISTICS

Ref. RCP00000 – Weight 193 kg

- Manual control over closing the frame and tipping by lever
- Springs dampen the end of travel
- Fork sleeves aperture 170 x 70 and spacing 375 mm
- Safety locking mechanism on 1 fork heel

Table to download from our website (see RC page).
One of your bin is necessary to fit our RC.



BIN TURNER

UPPER GRIP

RP

Suitable for all types of cases.
Upper lifting using forklift truck.
Load 500kg mini to 1T5 depending on model.



Video


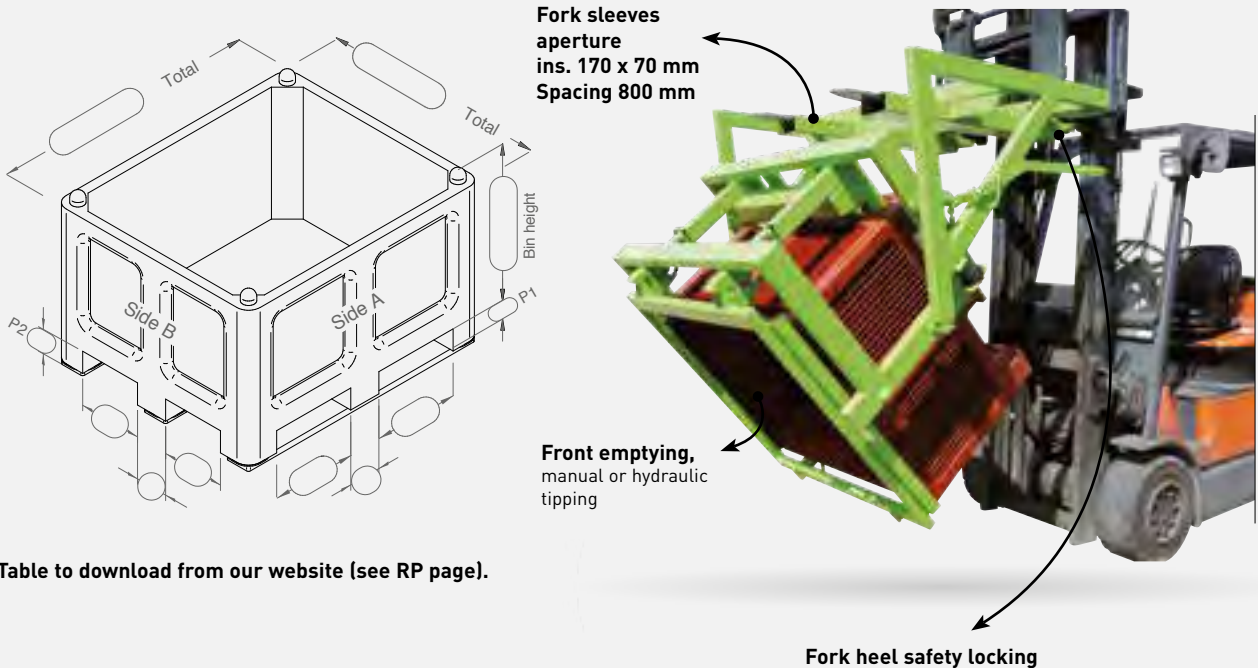


Table to download from our website (see RP page).

! INFORMATION REQUIRED FOR FEASIBILITY

Please indicate : The dimensions of your case by filling in the above diagram. - forklift side indicated by A or B, bearing in mind there must be a minimum gap of 90mm (mark P1-P2). Cross section of your forks - Lifting height of forklift mast - Height of container.

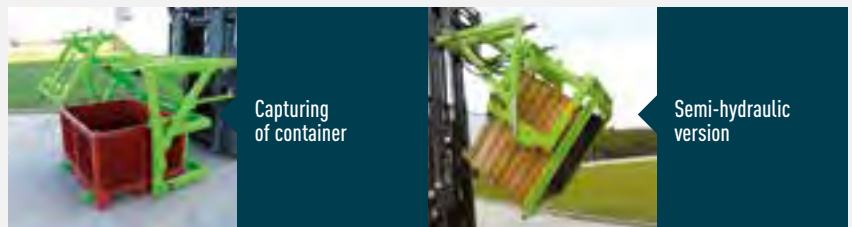

CHARACTERISTICS

One of your bin is necessary to fit our RP.
Load required 500 kg minimum - if lower load contact us.

3 MODELS :

Manual version
Ref. RPP00000 - Weight 300 kg

- Load capacity 1000 kg
- Case stays inside the mobile frame mobile, fitted with 4 gas struts
- Frame closing and tipping controlled manually by lever

Semi-hydraulic version
Ref. RPP20000 - Weight 320 kg

- Load capacity 1500 kg
- Works exactly like the manual version with regards to the mobile frame.
- Hydraulic switch actuated by 2 double-action jacks (to connect to forklift).

Fully hydraulic version
Ref. RPP30000

- Larger frame and hydraulic tipping (to connect to forklift)
- Customised production available - Contact us

PLASTERBOARD HANDLER

MP

Facilitates distribution of single units by sliding plasterboards of different thicknesses.
An innovative feature that prevents musculoskeletal problems.
Approved by a regulatory body.
Vertical storage.




CHARACTERISTICS

Board carrier trolley

Ref. MPP20000

- Permissible load 2000 kg
- Trolley with 4 high-density polyethylene feet
- Two forklift truck fork grips in 165 x 55 int. sleeves, distance between sleeves 660 mm
- 1 central grip for handling with the spreader
- Removal support arms with polyurethane wheels
- Painted equipment - Weight 244 kg

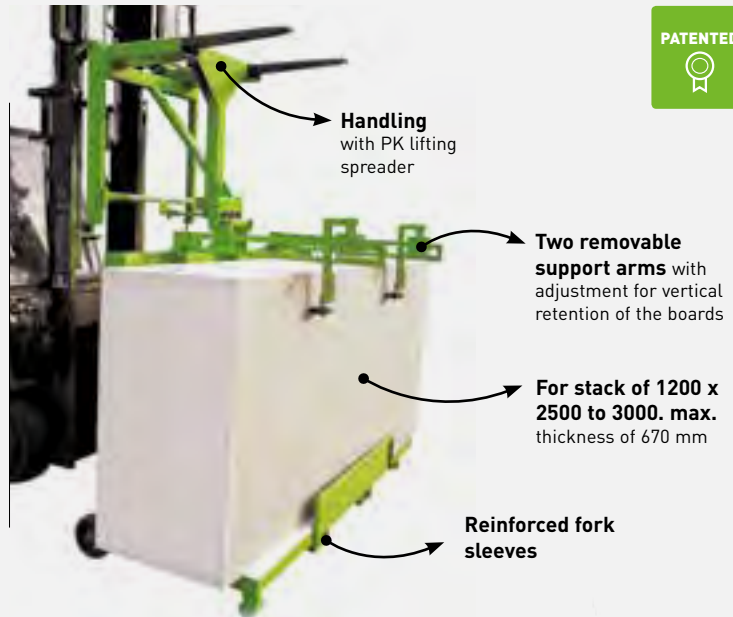


CHARACTERISTICS

Handling spreader

Ref. PKP20000

- 1 single spreader can manage a range of board holder trolleys
- Fork grips in 170 x 70 int. sleeves, distance between sleeves 660 mm
- Gripping hook with automatic locking system and manual unlocking lever located next to the bulkhead
- Weight 86 kg

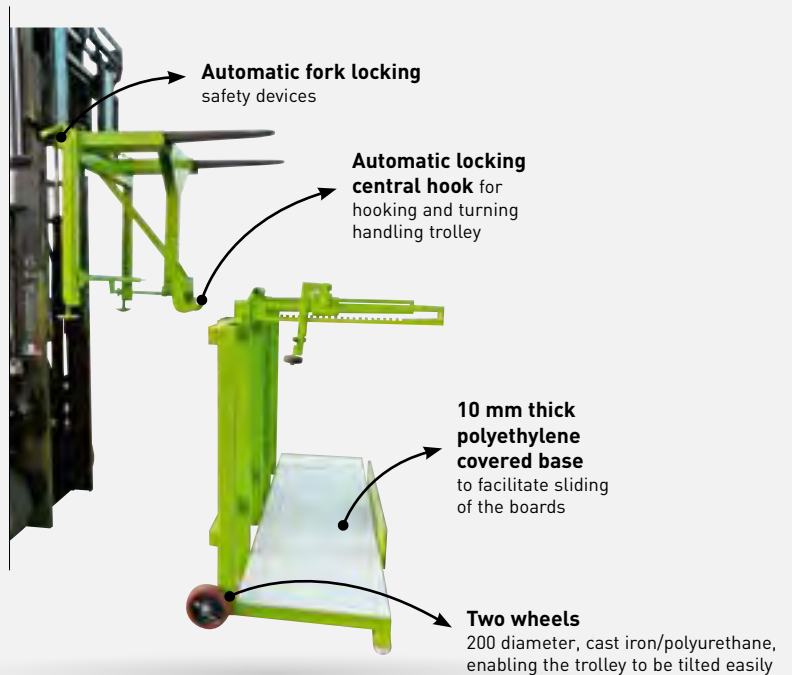

VISUAL AND KINEMATIC DESCRIPTION OF THE USE OF THE BOARD HANDLER



Boards are loaded onto the trolley



Stack placed on trolley



Adjustable retaining arms fitted



PK spreader put on forklift truck



Handling trolley gripped by the spreader - Lever is unclipped by automatic locking of the hook onto the handling trolley with no intervention from the forklift driver



Trolley tilted vertically, the 4 high-density polyethylene feet prevent the ground from being marked



Trolley in unloading position before removal of the PK spreader



Lever clipped on to enable the spreader to be unhooked and removed




Easy loading by just sliding the boards to the right - After loading, the adjustment arms need to be repositioned to hold the remaining boards



A close-up, grayscale photograph of a metal hinge mechanism on a door or panel. The hinge is a heavy-duty, industrial-style design with a central cylindrical pin and two curved arms. The metal has a matte, slightly textured finish. The background is a plain, light-colored surface, possibly the door or panel itself, showing some structural details like a recessed edge and a small latch or stop.

OPTIONS



OPTIONS

FINISH/BLOCKING/RELEASE

Finishing choice :

Stainless steel, galvanized version or customised paintwork



Blocking on forks (BFP)



Automatic release (DAP) :

by pressure, by contact, by drawbar



OPTIONS

LIDS

Sliding lid (CLP)
plastic strips or metal version



Dead-light
(OPP)




Hinged two parts lid
(COP)



Folding lid
on BR



Custom removable lid
(COS)

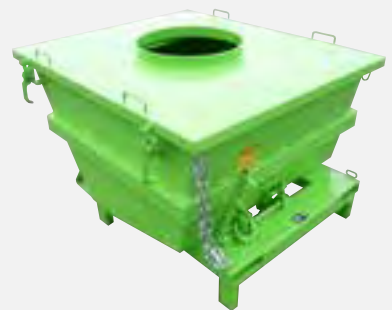

Fixed lid
with virole (CVP)



Articulated lid
with 1 ferrule (VIP)



Special cover
Lockable, opening with gas compass



OPTIONS

SPECIAL SLEEVES

For stacker



Clamps hold
on tipping bin



Clamps hold
on drop bottom skip



3 points
for tractor



Fork sleeves on 3 sides
(PTP)



Opening limiter
(LOP)



Guide flanges
(FLP)



Locked bin tilted
(BBP)



OPTIONS OTHERS


Grille and drain tap
(GRP)




Leakproof door
with foam seal (FEP)



Adhesive letters
(MAP)

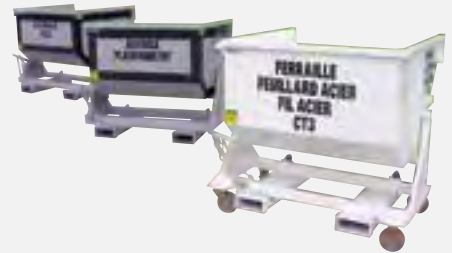

Trailer drawbar
(TRP10000)



Deceleration cylinder
for end of tipping process (VRP)



Hydraulic tipping
1 or 2 cylinders (BHP)



OPTIONS OTHERS

4 lifting lugs
(BAP)



Security by screw



Special leakproof inspection window
(in steel or plexiglass on request)

Tarpaulin or netting
(FBP)



Cross fork sleeves
on FAP/CAP models (FVP)



Lid
with aluminum roller shutter




Customized leak-proof lid
with ferrule on tipping skip



**OTHER OPTIONS
CONSULT US**

CUSTOM MADE PRODUCTS

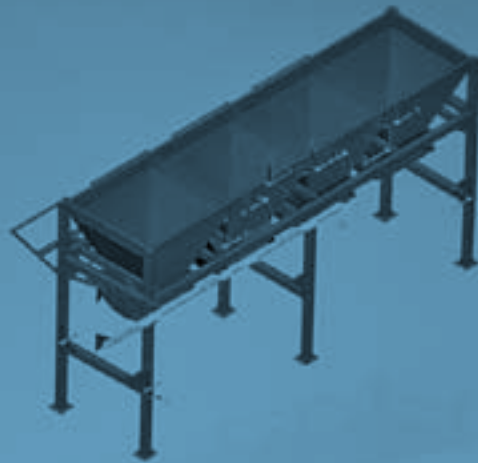

CUSTOM MADE PRODUCTS



IMAGINE, INNOVATE, CREATE, GAIN YOUR TRUST...


With **recognized know-how**, an ability to listen and professional expertise, we add to our wide range of standard products with tailor-made products to become your ideal partner and offer you :

- **Unique expertise in the analysis of your requirements**
- **Personalised advice**
- **Solutions to each of your issues**
- **A proactive service**
- **Guaranteed quality, reliability and safety**

Our design office works every day to invent and develop products to provide you with solutions adapted to your requirements and the regulations (EC).

The contract manager is your contact with all the company's services. They guide you through the development of your project and answer all of your questions.

Talk to us and benefit from our experience.

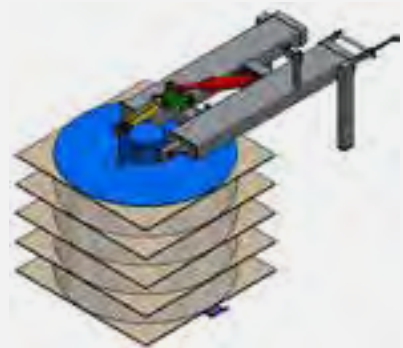

A tailor-made product designed to meet all your requirements !

CUSTOM MADE PRODUCTS

Multi-compartment skip

Tilting or opening bottom



Wire mesh version



Adaptation

with hinged tipping



Bin with opercule

or special glass hatch



CUSTOM MADE PRODUCTS

Adaptation fork sleeves

For lift truck with clamps



Hydraulic nipper

nipper



Tilting frame

For making wood faggots



BR-C skip

with command of opening lid with pedal



Special jib stacker grip

for storage platform




Hydraulic tilting

specific



Autonomous tilting device

12 volts - for plastic bin

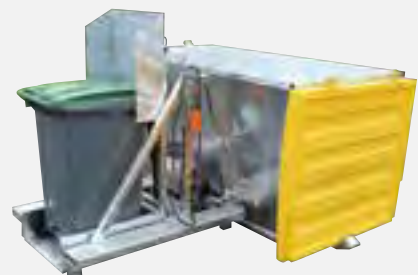

CUSTOM MADE PRODUCTS

Mobile ramp
special QL



Mounting on specific wheels
For use with or without



Truck
for fire equipment



Truck
Handling




Open-bottom skip
with special lid



CUSTOM MADE PRODUCTS

Special skip
for telescopic truck

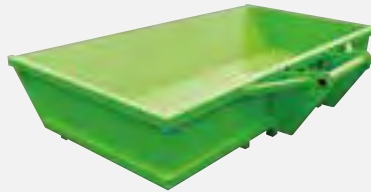



Grab point



Coupling with drawbar



Open sides
for long products

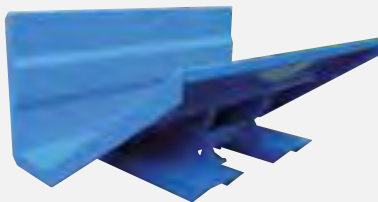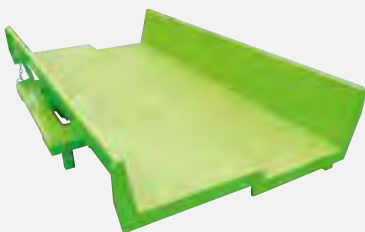

Skip
with double-axle steering



CUSTOM MADE PRODUCTS

Reinforced skips

Steelworks / foundry / aspiration






Hydraulic tilting

on tipping skip



Skip

for machine environment

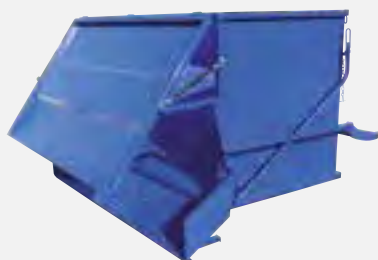

Sloped bottom skip

special

TELL US WHAT YOU NEED AND WE'LL MAKE THE SKIP TO FIT!



FOR A FREE ESTIMATE, PLEASE FILL IN THE FORM BELOW AND RETURN IT TO US.

Company :

Contact/Name :

Address :

Post code : City :

Tel. : Fax : E-mail :

Sphere of activity :

YOUR TECHNICAL REQUIREMENTS

Type of products handled :

Estimated load :

FINISH : Painted galvanized Stainless steel Food-safe paint Leak proof bin

TYPE : Pedestal-mounted model Castor-mounted model 2 fixed + 2 pivoting 4 pivoting
Forward movement Lateral movement

For use with : Forklift Stacker

Tipping system : Manual Hydraulic

QUANTITY :

DESIRED OPTIONS AND/OR COMMENTS :

DIMENSIONS REQUIRED

A (overall depth) :

or

B (interior depth) :

C (overall width) :


or

I (interior width) :

D (overall height) :

F (fork sleeves spacing) :

Dimensions of your forks : X

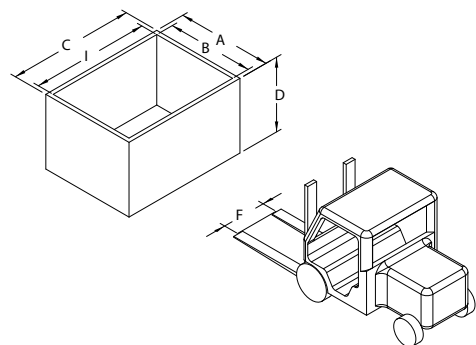

INFORMATION REQUIRED FOR A SUITABLE SOLUTION

INFORMATION ON YOUR NEED

- Choice of the equipment : skip, shovel, hopper, accessorie...
- Nature of products / handled waste
- Density or estimated load
- Capacity (in liters), desired dimensions
- Version on base / on wheels
- Finish : painted / galva / stainless steel...
- Quantity
- Options
- Other constraints to respect



INFORMATION ON THE HANDLING

- Prehension by : forklift truck, stacking truck, crane....
- Place of emptying
- Diverse constraints
- Section and spacing forks
- Load, lifting height of the forklitf truck

Well expressed choices facilitate selection !

ADD COLOUR YOUR WORKING ENVIRONMENT !

Our products are coated with a green polyurethane paint. As standard, we also offer the range of RAL colours below. Other RAL colours are available as an option so that our products can integrate seamlessly into your environment.



GREEN
Standard



YELLOW RAL
1003



YELLOW RAL
1028



ORANGE RAL
2004



RED RAL
3000



BLUE RAL
5015



GREEN RAL
6029



GREY RAL
7036



BROWN RAL
8004




BLACK RAL
9005



WHITE RAL
9010





Goubard

Z.A. de Suzerolle nord

CS 80035

49140 Seiches-sur-le-Loir, France

T. +33 (0)2 41 76 36 52

F. +33 (0)2 41 76 63 33

export@goubard.fr

www.goubard.fr