

# Facilitating your handling.

SKIPS

SHOVELS & BUCKETS

HOPPERS

ACCESSORIES

CUSTOM-MADE





# A family with ideas for improving handling.

## Goubard was born in the agricultural France of 1938.

At a time when more than one in four French people worked in agriculture most of the work was done using the muscular force of humans and animals, and with very basic machines. The Second World War broke out in Europe, people moved to live in the towns, and agriculture which was losing labour continued its mechanization that had started during the industrial revolution.

It was to help labour-starved farmers save time that the optimistic entrepreneur, Louis Goubard, created his small business manufacturing farm equipment, first in wood and later in steel (carts, tumbrils, barrels, tractor trailers, etc.). By the quality of its equipment and its sense of service, the company earned a very good reputation in the Maine-et-Loire department. This helped it to withstand the tumult of the historical and economic events of the first decades of its existence.

## 1968, creation of the first tipping skips.

The young Pascal Goubard, son of the founder, joined the family business with his wife Monique in May 1968, when France was in the grip of the most widespread general strike in history. During the "Thirty Glorious Years" when industry was regal, Pascal Goubard was inventive: he imagined the first tipping waste skips, including a forklift version for the wood industry.

The invention of skips with suction systems for collecting dust and chips from the wood industry followed.



## 1970s and 1980s, Goubard's conquest of the French market.

In the 1970s and 1980s Pascal Goubard and Gérard Toulrier, Monique's brother, were present at the International Handling Show in Paris.

The innovative audacity of the Goubard products was noticed and the marketing of the skips, now green, extended throughout France. In 1992, Goubard settled in larger premises on the site in Seiches-sur-le-Loir. But a year later, shock and pain! - Pascal Goubard died prematurely, leaving behind him a rapidly growing company. Gérard Toulrier succeeded Pascal Goubard at the head of the company.



## 1993 to 2021, the expansion of Goubard.

True to the vision of his predecessor, Gérard Toulrier surrounded himself with staff committed to Goubard's growth. Whereas one after the other companies were relocating abroad, Goubard continued to grow, by always listening carefully to its customers and being very present on the web. In 2005, Goubard, who was already leader in the French market, expanded its presence internationally into Europe.

By 2020, Goubard which was managed prudently by Gérard Toulrier, had become a major player in local employment. The company now employs 59 people, produces more than 6000 items a year and offers the broadest range of products on the market. On his retirement Gérard Toulrier chose to pass Goubard on to its employees. This was a great demonstration of trust in those who had helped him develop the company during the 27 years he had spent in charge of it.

## 2021, Goubard is purchased by its employees.

By various chance events the significant dates Goubard's history correspond with those of History, challenging our management and staff to double their efforts to provide you with ever more satisfaction. Continuing the company's tradition it was at the height of the Covid crisis that Gérard Toulrier handed the reins of the company over to his imperturbable and audacious 32 year old Technical Manager, Jérémie Bourdillon.

With his associates, Nathalie Chauvellier, Sales and Communication Manager in the company for nearly 30 years; Martine Fauquereau, Sales Manager who initiated our export drive in 2005; Pascal Jouselin, Administration and Finance Manager and all the employees participating in the capital, they are honed to the activity and ready to assist you with your handling challenges of tomorrow.



## The next phase: Audacious and faithful to the Goubard spirit.

The spirit and the teams at Goubard are still the same following the departure of Gérard Toulrier. Except for one major difference: the decisions and the vision of the company now fall on the shoulders of Jérémie Bourdillon. He is familiar with the market, always in search of ingenious solutions, and he carries high human values. He constantly inspires all the company teams with this energy with one aim only: facilitating your handling!





# Listening to you and understanding you, to serve you better.

## A sales team at the heart of your projects.

Our sales staff regularly **contribute to the design of Goubard equipment, since they understand it and its uses perfectly.**

**They will ask you about the essential requirements of your project** and will be able to give you the right advice on the equipment and services that best fit your specifications.

## Don't hesitate to contact us!

We are at your disposal from 8.00 am to 12.00  
and 1.30 pm to 5.30 pm.

### Even departments\*

Martine FAUQUEREAU, Area Manager  
Loan VINCENDEAU, Account Manager


### Odd departments\*

Nathalie CHAUVELLIER, Area Manager  
Sandrine JUMEAU, Account Manager

### EXPORT

Martine FAUQUEREAU, Export Manager

\*Department numbers

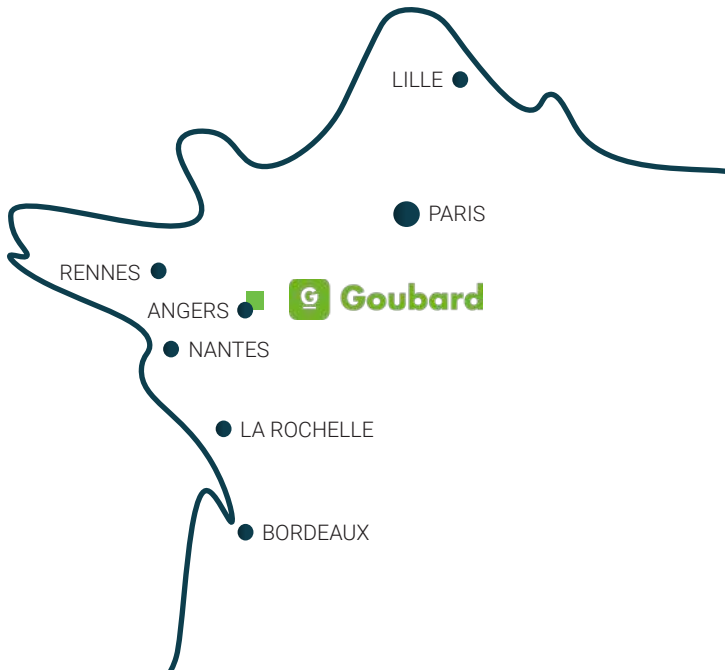

## Expertise for custom projects

You have a project that requires tailor made  
expertise and a visit to your premises?

### Custom R&D

Matthieu ROUSSEAU  
Field Sales Engineer

Z.A. de Suzerolle nord  
49140 Seiches-sur-le-Loir

T. +33 (2) 41 76 36 52  
M. [export@goubard.fr](mailto:export@goubard.fr)  
[www.goubard.fr](http://www.goubard.fr)

# In your daily work on the web.

## Follow our news on **Linkedin!**

LINKEDIN



YOUTUBE

## View your demo videos on **YouTube!**

The trick? Activate the bell to be  
alerted at every product release!



SITE WEB



Find our complete catalogue  
on [www.goubard.fr](http://www.goubard.fr)




# The user, at the heart of our innovation action.

## Innovation centred on the customer’s needs

Operator safety and worker comfort are at the heart of the design of our products.  
**This is why we pay special attention to ergonomics.**  
Several inventions and patents strengthen active and passive safety

- Automatic tip unlocking by contact
- Fork locking
- Slip limiter
- Safety latch

 All our products comply with the health and safety requirements of European Directive 2006/42/EC.



## Tailor made.

Among your requests 30% are specific and require an appropriate reply.

Goubard is perfectly organised to respond to your most demanding requirements and to call on the capacities of Matthieu Rousseau, our Field Sales Engineer, and the 4 Design Office Engineers.

Consideration of the smallest detail and invention of exceptional solutions is the daily life in the Goubard design office.

Rapidity of response is another of our trump cards, Matthieu Rousseau’s motto is **“At Goubard custom design has no effect on manufacturing lead times”**.

## Continuous innovation.

Goubard offers a wide choice of products for all types of handling recognized for their Quality and Long life. Our current products are the result of more than 80 years of experience and are constantly evolving. For safety reasons we never innovate alone. **Goubard has the support of the CETIM and Bureau Veritas to ensure compliance with changes in standards**, and that of many faithful users who participate actively in the evolutions of Products by the feedback of their experience. As a result, we have several dozen product improvement action plans per year, ensuring a constantly improving product range.

# You Lease your vehicles? You can also Lease your Goubard equipment!

Without penalizing your borrowing capacity.  
Have the right resources available at the right time (technical changes, changes in regulations, etc.).  
Optimise the comfort and productivity of your sites with efficient equipment.  
Outsource the management of your end-of-life waste.

Our partner  GreenFlex can accompany you in your project.

1

### Sharing and collecting information

Identification of uses and needs.

2

### Deployment of new equipment

Sizing and expression of needs.

3

### Setting up a leasing contract

Off balance sheet according to accountancy standards

Without penalizing your borrowing capacity

Adapted to equipment usage durations.

4

### Equipment control

View and management of your fleet throughout the service life of your equipment

Disposal of end-of-life equipment (reuse or recycling)

## The solution for reducing your carbon footprint.

For many years now we have been closely associated with the industry’s environmental activities. **Since the introduction of selective collection and sorting of waste Goubard has been participating in its optimization, via its products.**

**We understand the realities of your operations and we believe that the most environmentally friendly equipment is that which is reliable, durable and repairable and adapts perfectly to your needs. That is why we are launching this leasing service. Throughout the duration of your contract, you will have the support of our Service Department so that your equipment stands the test of time.**



# Details we need to offer you the ideal solution.



## Information on the application.

- ☐ Choice of equipment: Skips, buckets, accessories, etc.
- ☐ Nature of products / waste handled
- ☐ Estimated density or load
- ☐ Capacity (litres) and dimensions required
- ☐ Base-mounting / wheeled version
- ☐ Finish: Painted / galvanised / stainless steel, etc.
- ☐ Quantity
- ☐ Options
- ☐ Constraints to be respected



## Handling information.

- ☐ Lifting by: forklift, stacker, turner, crane, etc.
- ☐ Emptying location
- ☐ Miscellaneous constraints
- ☐ Fork section / centre distance
- ☐ Working load, fork lift height
- ☐ Miscellaneous constraints to be respected

**You have fixed your specifications?  
Contact us!**

**+33 (2) 41 76 36 52**

For any specific request,  
complete the custom form on page 107.

# Testing: A unique Goubard offer!

**Nothing can replace the possibility of testing a product.**  
This remains the best way to test quality and reliability.

**Would you like a test? Nothing could be simpler.**

Contact our sales team on **+33 (2) 41 76 36 52**

They will guide you in the best choice and define with you  
the loan conditions for the equipment according to your specific requirements.

## 95% of the customers who tested our products ordered them!

Photograph: Test of the GB big-bag bucket (10 big-bags in 10 minutes), presented on page 65.





# Adapting our equipment to your needs.



## Customized solutions for every situation.

Compose the product that best suits your needs freely:

- Dozens of options to suit all requirements
- Painted, galvanized or stainless steel finish.
- Choice of the colour
- Specific materials and coating: perforated sheet, wire mesh, antinoise coating, etc.




## Solutions for all handling situations.

Our products are equipped for different types of hitching depending on your handling equipment:



- Frontal fork guides
- Rotary head fork guides
- Stacker fork guides
- Crane lifting points
- Hoist lifting points
- Strap slinging points
- Clamp forklift gripping points
- Other types of gripping: grabs, telehandlers, etc.

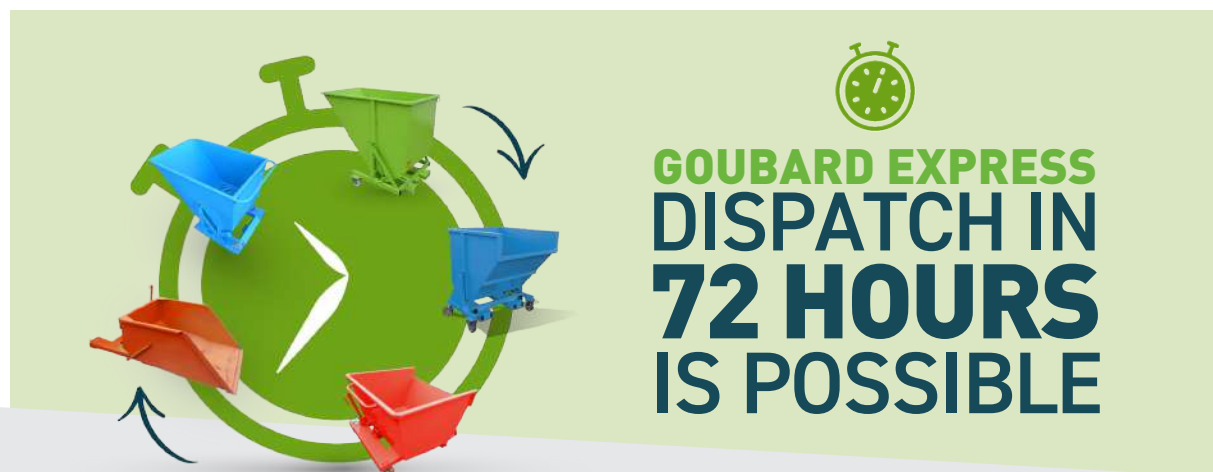

\*Offer valid for 5 part numbers with additional shipping costs.  
Other part numbers 1 week ex-works – Consult us.

# Spare parts, servicing or troubleshooting? Our Service Department: a service +

The local production of GOUBARD products guarantees **reactivity** when it comes to maintenance and repair.

The stock of accessories, replacement parts and consumables is **regularly replenished** to ensure the optimal operation of your equipment over time.

Goubard also offers a **preventive and curative maintenance service**, a complete package ranging from the simple supply of original parts right up to sending a **member of staff to your site**, whether for a repair or service. A reassuring and convenient solution for our customers.



**Reliable, durable and repairable**  
**Our equipment stands the test of time!**

- ✓ Staff who are there to understand your needs
- ✓ Fast response to your request
- ✓ In-depth product knowledge
- ✓ Stock that is regularly replenished



**Don't hesitate to consult us!**





# Purchase in complete safety.

## Accessories approved by the applicable regulations.

All lifting accessories produced by our company are to individually approved by the Bureau Veritas, according to Machinery Directive 2006/42/EC.




The guarantee that your equipment conforms to the standards in force.

# Practical guide understanding our technical diagrams.

## Glossary:

- A : overall depth
- B : interior depth
- C : interior depth
- I : interior width
- D : overall height
- D1 : interior height
- E : maximum loading height
- K : overall height (when emptying)
- F : fork sleeves spacing

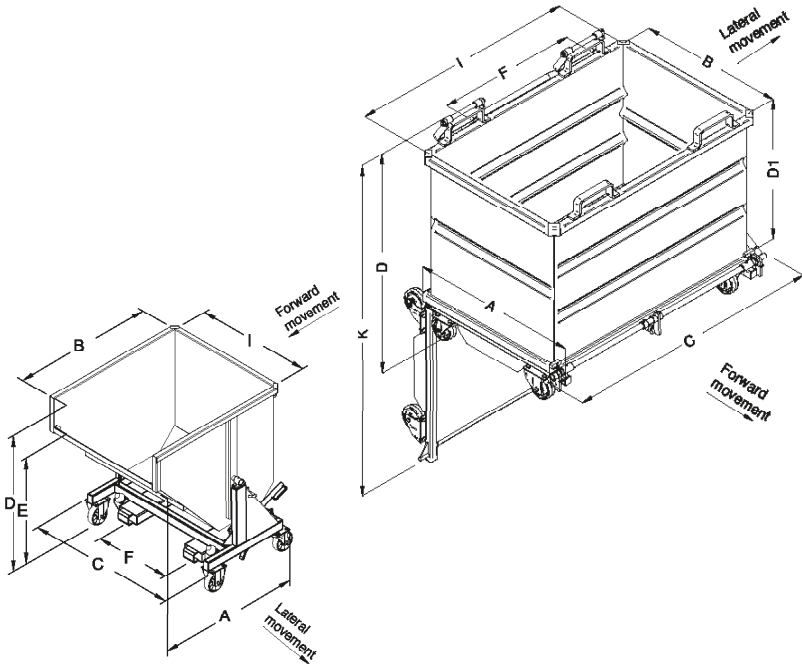

## User manuals for all products to promote good practice.

We have re-worked our operating instructions to make them understandable to all operators. These aids facilitate the daily life of safety personnel when training in the use of our equipment.



## Our references:

MANITOU  
KILOUTOU  
RENAULT,  
EVIAN,  
TEFAL,  
ST GOBAIN,  
POINT.P,  
LAFARGE,  
BOSCH,  
SUEZ,  
VÉOLIA,  
AIRBUS,  
ARCELOR,  
EURODEN...

**⚠ ATTENTION :** Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

## New!

Sometimes, it is only necessary to satisfy the Essentials to perform your handling. That's why some of our equipment now has a simplified equivalent.

“Essential” range equipment covers the basic requirements of the associated products. A simplified design without compromising safety and reliability!

## Spot “Essential” equipment!



This pictogram shows that “Essential” items are present on a product page. At the same time the line corresponding to the product in the specifications table is coloured.

See pages: GIL, GIO, GO, GXO, FAP-E, TB-F, GVT, CR-T.



## HANDLING SKIPS

Automatic, drop-bottom,  
bottom opening, others

Page 06

## HOPPERS

For big-bags on feet,  
guillotine, bottom opening,  
helmet

Page 48

## SHOVELS & BUCKETS

Loading shovel, hydraulic  
bulk bucket

Page 58

## ACCESSORIES

Lifting jib, boom, hook,  
spur, beam

Page 66

## OPTIONS

lids, Stainless steel, for  
stacker, hydraulic version

Page 94

## CUSTOM MADE PRODUCTS

Tailor-made to your  
requirements

Page 100

# FACILITATING YOUR HANDLING.

Customised solutions to meet all your requirements in terms of dumping buckets, hoppers, excavators, buckets and handling and lifting accessories.

A manufacturer with the know-how to offer you an optimum solution.

Work efficiently and in complete safety with our reliable, high-quality equipment, compliant with current EU standards.





Find out more about our range by browsing though the following pages.






# HANDLING SKIPS

## TIPPING SKIP

AG	High-capacity .....	27
AS	Vacuum-ready .....	14
BC	Open .....	32
BN	with front door .....	34
BS	Low tipping skip with front door .....	36
CG	Lifting beam attachment and handle .....	30
CP	Lifting beam .....	28
GA	Vacuum-ready skip - reduced-height .....	15
GCM	Tipping frame .....	31
GIE	Multi-use .....	08
 GIL	Essential small capacity .....	11
GIN	Reinforced .....	12
 GIO	Essential - Load 1000kg .....	10
GIR	For heavy products .....	13
GM	Polyethylene .....	26
 GO	Essential reduced-height .....	20
GS	Reduced-height .....	16
GS-D	Waste disposal .....	22
GSmulti	Compartments - tailor-made .....	23
GSS	Customised version .....	18
GS-V	Reduced-height viticulture .....	21
GX	Automatic .....	24
 GXO	Essential automatic .....	25
IA	Vacuum-ready sloped bottom .....	15
PL	Lifting beam for emptying CP skips .....	29
SQ	Open tipping skip for heavy loads .....	33

## DROP BOTTOM SKIP

CAP	With heel cage safety .....	38
FAP	Hinged stirrup safety .....	39
CAP/FAP	Options .....	40
FAP-C	With cover .....	42
 FAP-E	Essential - Working load 1000kg .....	41
FOP-FIP-FMP	For aggregates .....	43

## MORE MODELS

BR	For forklift with rotating head .....	46
BT	For telescopic fork-lift .....	45
FP	Sloped-bottom skip with front door .....	37
SF	Easel bottom opening .....	44





# TIPPING SKIP



## MULTI-USE



# OPTIONS

## AND FUNCTIONS OF USE

Versatile y maneuverable.  
Front-loading lip.  
Automatic release.

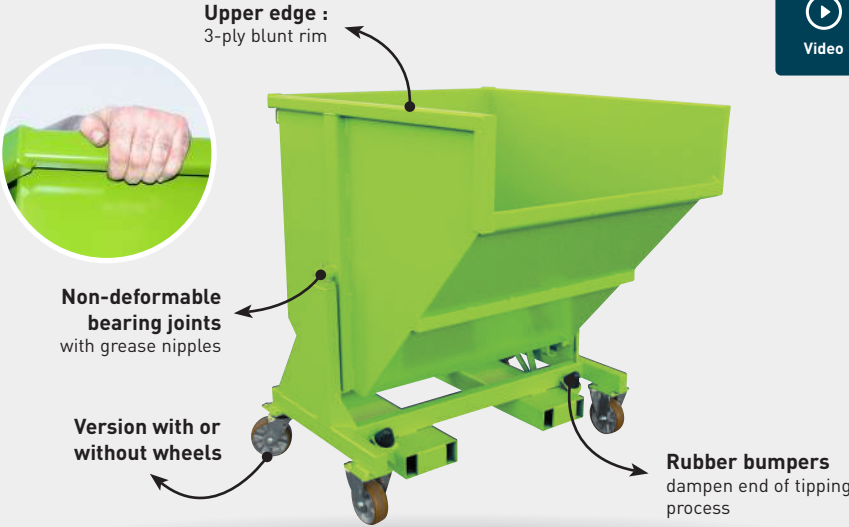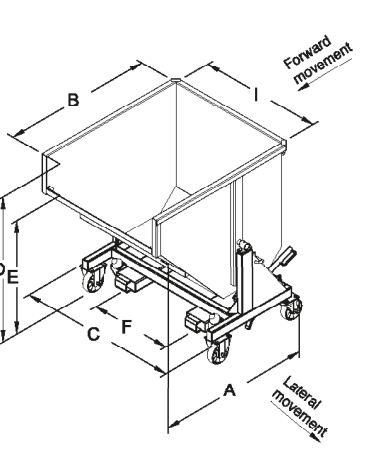

### CHARACTERISTICS

- Capacity : 480 to 2500 litres
- Bin : 3 and 4 mm sheet metal
- Rigid tubular chassis : 4 and 5 mm sheet metal
- Sealed cross-bars (improved interior pipe corrosion resistance)
- Automatically unlocks and tips on contact (anti-slip device). Lever for manual tipping
- Fork sleeves aperture and spacing (F) can be modified on request
- Pedestal-mounted models (except the 480 L model) can be used with pallet trucks (between fork sleeves)
- Castor-mounted models have 2 fixed + 2 pivoting alu/polyurethane castors and a handrail
- Safety chain included
- Options on request

Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	E	F	Fork sleeves aperture	Weight kg	Painted ref.
70 series - Bin height 700 mm													
480	1500	-	-	1250	1185	970	745	1015	835	420	165 x 55	145	IEP05000
480	1200	150	Fwd.	1315	1185	1030	745	1130	950	420	165 x 55	160	IEP05151
640	1500	-	-	1250	1185	1220	995	1015	835	730	165 x 55	160	IEP06000
640	1200	150	Fwd.	1315	1185	1280	995	1130	950	670	165 x 55	175	IEP06151
780	1500	-	-	1250	1185	1475	1250	1015	835	730	165 x 55	180	IEP08000
780	1200	150	Fwd.	1315	1185	1535	1250	1130	950	730	165 x 55	190	IEP08151
960	1800	-	-	1250	1185	1720	1495	1015	835	730	165 x 55	195	IEP09000
960	1800	160	Lat.	1250	1185	1860	1495	1130	950	730	165 x 55	210	IEP09161
100 series - Bin height 1000 mm													
960	1800	-	-	1340	1265	1240	995	1290	1025	740	170 x 70	220	IEP10000
960	1800	160	Fwd.	1395	1265	1295	995	1410	1145	660	170 x 70	235	IEP10161
1440	1800	-	-	1340	1265	1740	1495	1290	1025	900	170 x 70	265	IEP15000
1440	1800	160	Lat.	1340	1265	1830	1495	1410	1145	900	170 x 70	280	IEP15161
1920	1800	-	-	1300	1220	2240	1995	1310	1045	900	170 x 70	310	IEP20000
1920	1800	160	Lat.	1300	1220	2330	1995	1430	1165	900	170 x 70	325	IEP20161
120 series - Bin height 1200 mm													
1250	1800	-	-	1470	1320	1250	995	1530	1180	740	170 x 70	270	IEP12000
1250	1800	160	Fwd.	1470	1320	1295	995	1650	1300	660	170 x 70	285	IEP12161
1870	1800	-	-	1470	1320	1750	1495	1530	1180	900	170 x 70	318	IEP18000
1870	1800	160	Lat.	1470	1320	1830	1495	1650	1300	900	170 x 70	330	IEP18161
2500	1800	-	-	1470	1320	2250	1995	1530	1180	900	170 x 70	368	IEP25000
2500	1800	160	Lat.	1470	1320	2340	1995	1650	1300	900	170 x 70	380	IEP25161

Dimensions in mm for basic model (for guidance only). Lat.: Lateral movement - Fwd.: Forward movement.



Hinged double lid



Sliding lid



Customised fork sleeves for stackers



Galvanized pedestal-mounted model



Special sleeves catch carriage with clamps



Articulated lid with ring



Lateral movement (or frontal according to reference)



# AUTO TIPPING SKIP

## ESSENTIAL - LOAD 1000KG




# AUTO TIPPING SKIP


## ESSENTIAL - SMALL CAPACITY



Low-cost.  
Versatile.  
Automatic release.

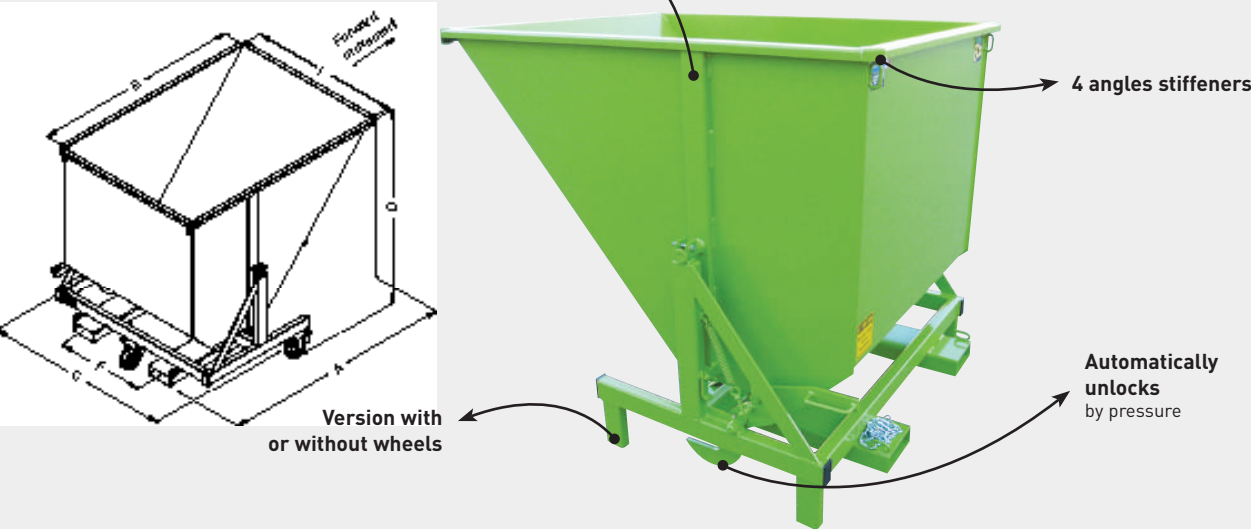

For light products – Load 750 kg.  
Low-cost.  
With automatic release.

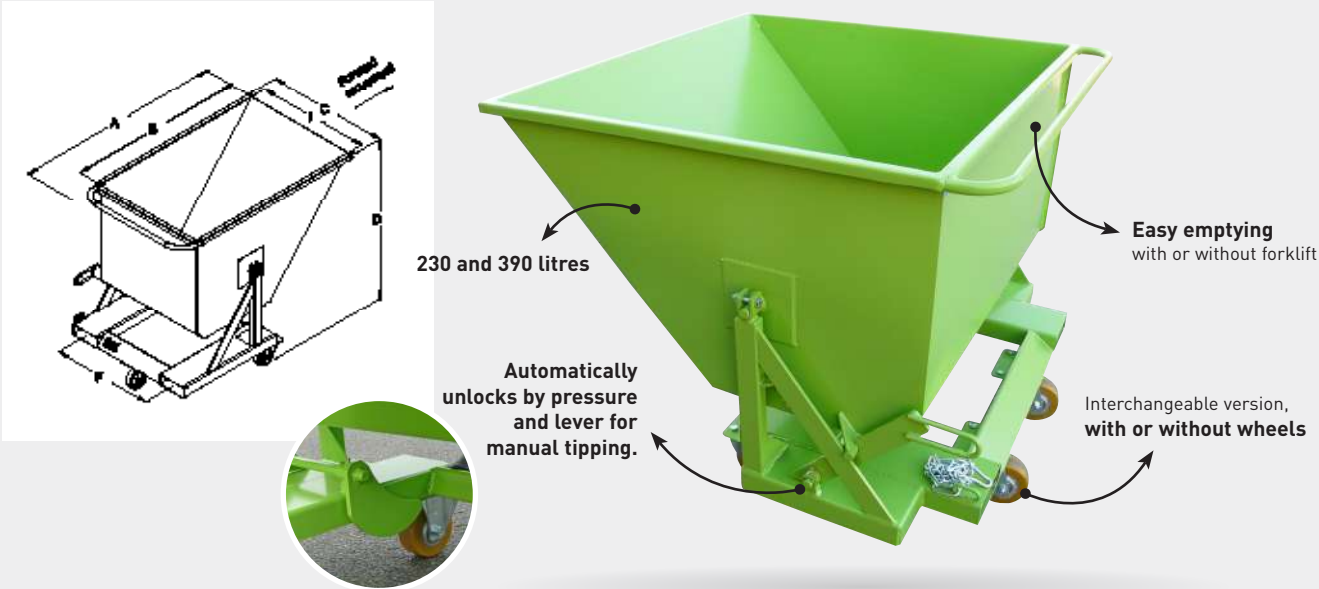

CHARACTERISTICS												
Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
685	1000	-		1500	1355	965	750	1265	400	165 x 55	160	IOP07000
685	1000	125	Fwd.	1500	1355	1020	750	1265	400	165 x 55	165	IOP07123
910	1000	-		1500	1355	1215	1000	1265	600	165 x 55	180	IOP09000
910	1000	125	Fwd.	1500	1355	1270	1000	1265	600	165 x 55	185	IOP09123
1140	1000	-		1500	1355	1465	1250	1265	600	165 x 55	200	IOP11000
1140	1000	125	Fwd.	1500	1355	1520	1250	1265	600	165 x 55	205	IOP11123
1370	1000	-		1500	1355	1715	1500	1265	600	165 x 55	220	IOP14000
1370	1000	125	Fwd.	1500	1355	1770	1500	1265	600	165 x 55	225	IOP14123

Dimensions in mm for basic model (for guidance only).

CHARACTERISTICS												
Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
230	750	-	-	1100	950	715	600	840	540	142 x 52	64	ILP02000
230	750	125	Fwd.	1100	950	715	600	930	540	142 x 52	70	ILP02121
390	750	-	-	1100	950	1120	1000	840	700	142 x 52	84	ILP04000
390	750	125	Fwd.	1100	950	1120	1000	930	700	142 x 52	90	ILP04121

Dimensions in mm for basic model (for guidance only).




# REINFORCED AUTO TIPPING SKIP




# AUTO TIPPING SKIP FOR HEAVY PRODUCTS



For heavy waste.  
(rubble, waste of building site, metals).  
Catch with the heel of the forks.

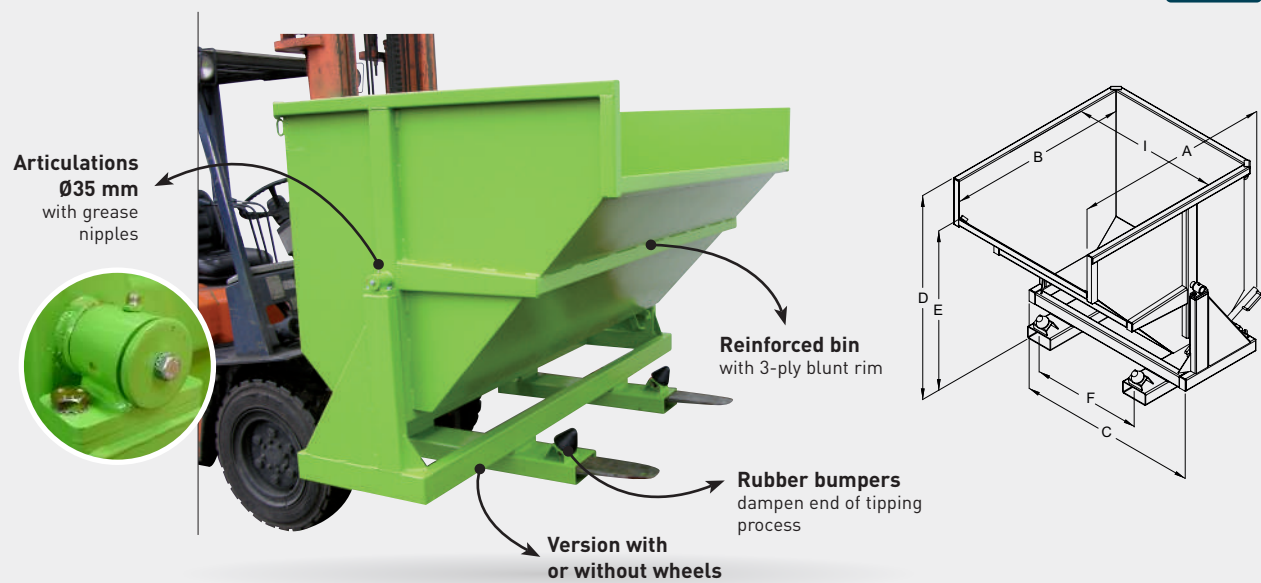

Intense use.  
Ideal for scrap, waste from demolition, block hones...  
Strong impact resistance.

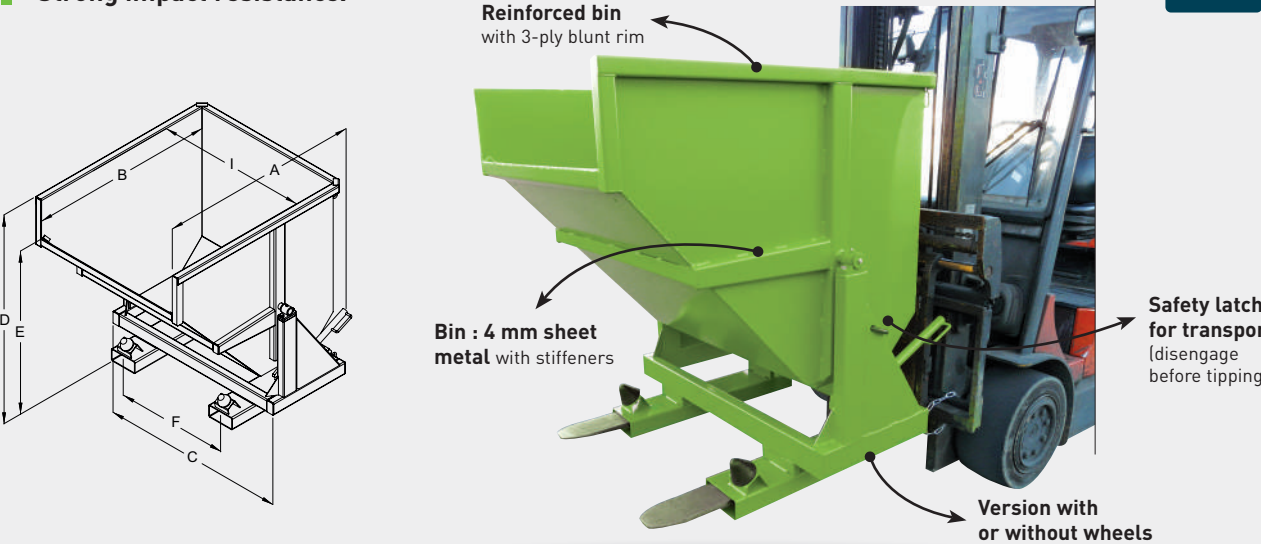

CHARACTERISTICS													
Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	E	F	Weight kg	Painted ref.	
80 series - Bin height 800 mm													
550	2000	-		1250	1200	1000	750	1250	1080	740	180	INP05000	
550	1800	160 P	Fwd.	1280	1200	1000	750	1295	1125	310	194	INP05161	
750	2000	-		1250	1200	1250	1000	1250	1080	740	205	INP08000	
750	1800	160 P	Fwd.	1280	1200	1250	1000	1295	1125	560	217	INP08161	
950	2500	-		1250	1200	1500	1250	1250	1080	900	220	INP10000	
950	2400	160 F	Lat.	1280	1200	1500	1250	1295	1125	810	240	INP10162	
1150	2500	-		1250	1200	1750	1500	1250	1080	900	240	INP12000	
1150	2400	160 F	Lat.	1280	1200	1750	1500	1295	1125	900	260	INP12162	
100 series - Bin height 1000 mm													
950	2500	-		1300	1220	1250	1000	1400	1140	740	230	INP11000	
950	2400	160 F	Fwd.	1330	1220	1250	1000	1460	1210	560	250	INP11162	
1450	2800	-		1300	1220	1750	1500	1400	1140	900	285	INP15000	
1450	2400	160 F	Lat.	1330	1220	1750	1500	1460	1210	900	305	INP15162	
1950	3000	-		1300	1220	2250	2000	1400	1140	900	320	INP20000	
1950	2400	160 F	Lat.	1330	1220	2250	2000	1460	1210	900	340	INP20162	
120 series - Bin height 1200 mm													
2500	3000	-		1470	1325	2250	2000	1625	1280	900	372	INP25000	

Lat. : Lateral movement - Fwd. : Forward movement - Castors : P=Alu/polyurethane, C=Cast iron/polyurethane  
Dimensions in mm for basic model (for guidance only).

CHARACTERISTICS													
Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	E	F	Weight kg	Painted ref.	
80 series - Bin height 800 mm													
550	2500	-		1250	1200	1000	750	1250	1080	740	210	IRP05000	
550	2400	160 F	Fwd.	1280	1200	1000	750	1295	1125	310	230	IRP05162	
750	2500	-		1250	1200	1250	1000	1250	1080	740	235	IRP08000	
750	2400	160 F	Fwd.	1280	1200	1250	1000	1295	1125	560	255	IRP08162	
950	3000	-		1250	1200	1500	1250	1250	1080	900	285	IRP10000	
950	2400	160 F	Lat.	1280	1200	1500	1250	1295	1125	810	305	IRP10162	
1150	3000	-		1250	1200	1750	1500	1250	1080	900	320	IRP12000	
1150	2400	160 F	Lat.	1280	1200	1750	1500	1295	1125	900	340	IRP12162	

Lat. : Lateral movement - Fwd. : Forward movement - Dimensions in mm for basic model (for guidance only).




# VACUUM-READY SKIP TIPPING VERSION



# VACUUM-READY TIPPING SKIP



Dust/chip collector for vacuum extractor.  
Withstands up to 40 kPa.  
Versatile connections.

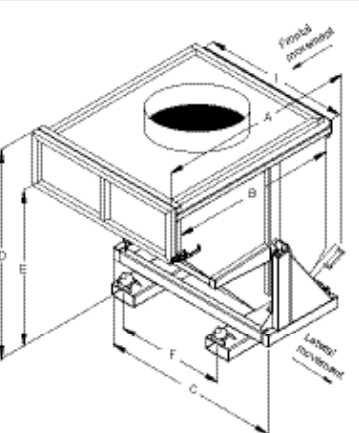

## CHARACTERISTICS

- Capacity : 550 to 1950 Litres
- Leakproof bin : 3 mm sheet metal with 4 mm non-deformable reinforcements
- Non-deformable bearing joints have grease nipples
- Safety latch for transport (disengage before tipping)
- Lever for manual tipping
- For specific connections, please contact us
- Fork sleeves can be modified on request. Aperture : 170 x 70 mm. Spacing : see F in table
- Safety chain included
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Castor-mounted models have 2 fixed + 2 pivoting Ø160 mm castors and a handrail

Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
550	2000	-	-	1380	1200	1000	745	1325	740	170 x 70	305	ASP05000
550	1800	160 P	Fwd.	1380	1200	1000	745	1375	310	170 x 70	317	ASP05161
750	2000	-	-	1380	1200	1250	1000	1325	740	170 x 70	328	ASP08000
750	1800	160 P	Fwd.	1380	1200	1250	1000	1375	560	170 x 70	340	ASP08161
950	2500	-	-	1400	1220	1250	1000	1480	740	170 x 70	398	ASP11000
950	2400	160 C	Fwd.	1400	1220	1250	1000	1545	560	170 x 70	418	ASP11162
1450	2800	-	-	1400	1220	1750	1500	1480	900	170 x 70	510	ASP15000
1450	2400	160 C	Lat.	1400	1220	1750	1500	1545	900	170 x 70	530	ASP15162
1950	3000	-	-	1400	1220	2250	2000	1480	900	170 x 70	609	ASP20000
1950	2400	160 C	Lat.	1400	1220	2250	2000	1545	900	170 x 70	629	ASP20162


Castors : P= Alu/polyurethane, C=Cast iron/polyurethane. D : Overall height not including ferrule. Lat. : Lateral movement - Fwd. : Forward movement  
Dimensions in mm for basic model (for guidance only)

Waste collector for vacuum extractor.  
Withstands up to 40 kPa.  
Versatile connections.

## TIPPING REDUCED-HEIGHT-GA

### CHARACTERISTICS

- Capacity : 520 litres
- Leak-proof bin : 3 and 4 mm sheet metal with non-deformable reinforcements
- Automatically unlocks and tips. Lever for manual tipping
- Pedestal-mounted models can be used with pallet trucks (under fork sleeves)
- Castor-mounted models (forward movement) have a handrail and 2 fixed + 2 pivoting Ø125 mm alu/polyurethane castors
- For customised products, please contact us
- Safety chain included

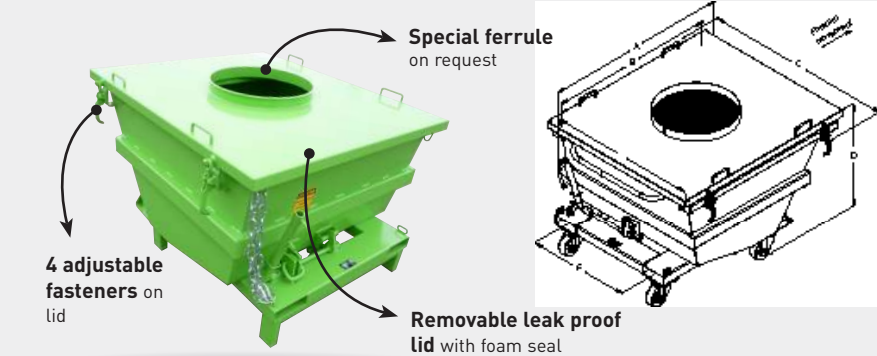


Capacity litres	Load kg	Castors Ø	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
520	1200	-	1370	1160	1200	1000	820	700	165 x 55	205	GAP05000
520	1200	125	1370	1160	1200	1000	850	700	165 x 55	215	GAP05121

Dimensions in mm for basic model (for guidance only). D : overall height not including ferrules

## SLOPED BOTTOM - IA

### CHARACTERISTICS

- Capacity : 530, 1000 and 1500 litres
- Bin : 3 mm sheet metal with 4 mm non-deformable reinforcements
- Fixed welded leak proof lid with rimless ferrule
- Lever for manual door opening
- Safety chain included
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Castor-mounted models (forward movement) have a handrail and 2 fixed + 2 pivoting Ø160 mm alu/polyurethane castors
- For customised products, please contact us

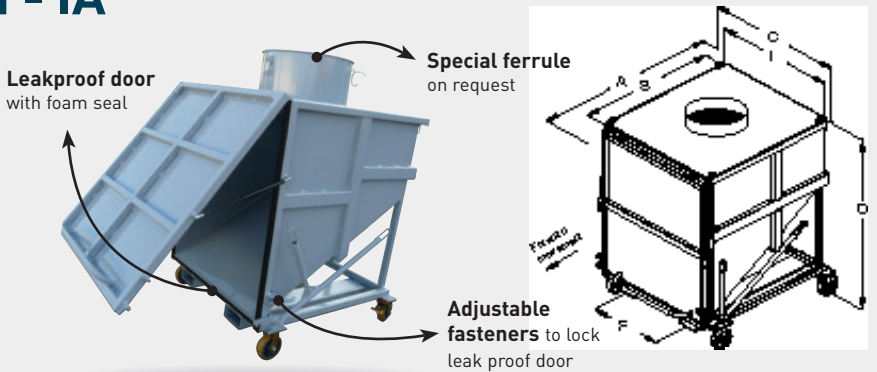

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
530	2000	-	1030	800	1200	1000	1025	740	170 x 70	240	IAP05000
530	1800	160	1110	800	1200	1000	1155	580	170 x 70	252	IAP05161
1000	2000	-	1340	1160	1200	1000	1370	740	170 x 70	337	IAP10000
1000	1800	160	1420	1160	1200	1000	1485	620	170 x 70	349	IAP10161
1500	2000	-	1340	1160	1710	1500	1370	740	170 x 70	400	IAP15000
1500	1800	160	1420	1160	1710	1500	1485	740	170 x 70	412	IAP15161

Dimensions in mm for basic model (for guidance only). D : overall height not including ferrules



# TIPPING SKIP



## REDUCED-HEIGHT



# OPTIONS

## AND FUNCTIONS OF USE

Automatic release.  
Complete emptying (no filling requirements).  
Perfect for collecting machine cuttings, scraps, sludge, marc, etc.

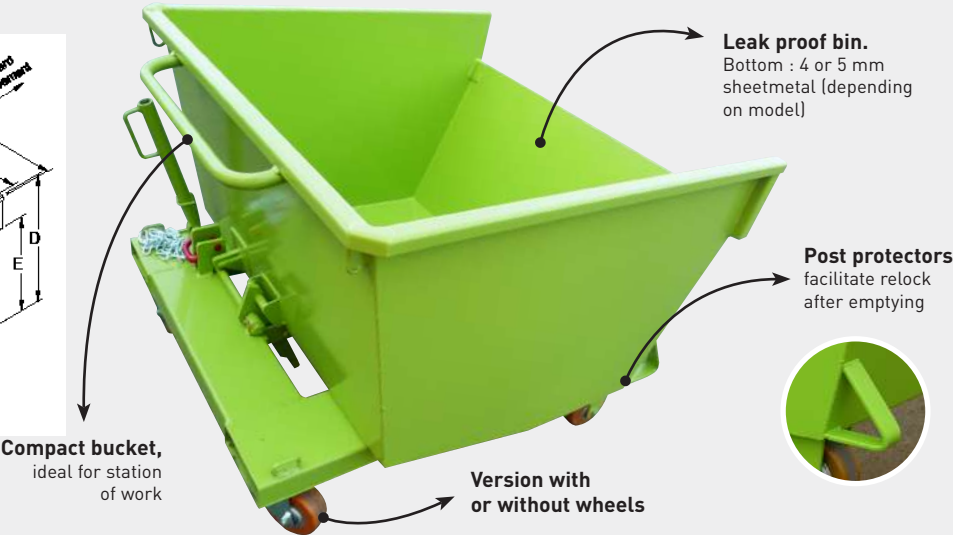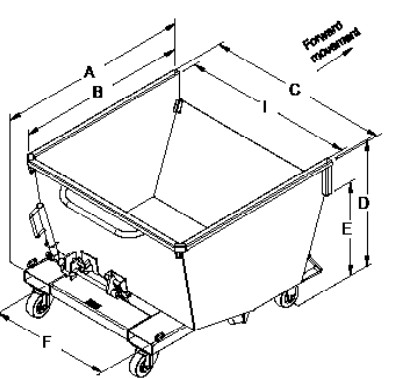

SPECIAL MANUFACTURING  
**CUSTOM-MADE**  
See GSS pages 18-19



### CHARACTERISTICS

- Capacity : 200 to 1500 litres
- Articulation joints at end of fork sleeves have extra-large bearings and grease nipples
- Integrated tubular chassis : 4 and 5 mm sheet metal
- Safety latch for transport (disengage before tipping)
- Automatically unlocks and tips on contact (anti-slip device) and lever for manual tipping
- Fork sleeves and spacing (F) can be modified on request
- Pedestal-mounted models can be used with pallet trucks (under fork sleeves)
- Safety chain included
- Castor-mounted models forward movement with 2 fixed + 2 pivoting castors and a handrail

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	E	F	Fork sleeves ins.	Weight kg	Painted ref.
200	1200	-	955	815	785	720	615	415	480	165 x 55	85	GSP02000
200	1200	125N	955	815	785	720	630	430	480	165 x 55	89	GSP02120
300	1200	-	955	815	915	850	675	475	480	165 x 55	95	GSP03000
300	1200	125N	955	815	915	850	690	485	480	165 x 55	100	GSP03120
500	1200	-	1145	1000	1080	1000	775	620	700	165 x 55	136	GSP05000
500	1200	125P	1145	1000	1080	1000	790	635	700	165 x 55	145	GSP05121
700	1200	-	1170	1035	1280	1200	870	665	700	165 x 55	147	GSP07000
700	1200	125P	1170	1035	1280	1200	890	675	700	165 x 55	156	GSP07121
1000	2000	-	1565	1440	1280	1200	930	785	700	170 x 70	213	GSP10000
1000	1200	150P	1565	1440	1280	1200	985	840	700	170 x 70	223	GSP10151
1500	2000	-	1690	1540	1280	1200	1160	940	700	170 x 70	253	GSP15000
1500	1800	160P	1690	1540	1280	1200	1225	1000	700	170 x 70	264	GSP15161

Dimensions in mm for basic model (for guidance only). Castors: N=nylon RB, P=alu/polyurethane. Loaded skip center of gravity at end of forks.



# TIPPING SKIP

## CUSTOMISED VERSION



Tell us what you need and we'll make the skip to fit !

Versatile, for collecting all kinds of waste (metal scraps, chips, wood, paper, sludge, marc, etc.).  
Various dimensions available.  
Painted, galvanized or stainless steel.  
Pedestal- or castor-mounted.  
Hydraulic or manual tipping.



# GSS SKIP

## CUSTOMISATION FORM



FOR A FREE ESTIMATE, PLEASE FILL IN THE FORM BELOW AND RETURN IT TO US

Company : .....  
Contact/Name : .....  
Adress : .....  
Post code : ..... City : .....  
Tel. : ..... Fax : ..... E-mail : .....

### YOUR TECHNICAL REQUIREMENTS

Type of products handled : .....  
Estimated load : .....


FINISH : Painted ☐ Galvanized ☐ Stainless steel ☐ Food-safe paint ☐  
TYPE : Pedestal-mounted model ☐ Castor-mounted model ☐ 2 fixed + 2 pivoting ☐ 4 pivoting ☐  
Forward movement ☐ Lateral movement ☐

For use with : Forklift ☐ Stackler ☐  
Tipping system : Manual ☐ Hydraulic ☐  
QUANTITY : .....

DESIRED OPTIONS AND/OR COMMENTS : .....  
.....

### DIMENSIONS REQUIRED

A (overall depth) : .....  
or  
B (interior depth) : .....  
C (overall width) : .....  
or  
I (interior width)) : .....  
D (overall height) : .....  
F (fork sleeves spacing) : .....  
Dimensions of your forks : ..... X .....

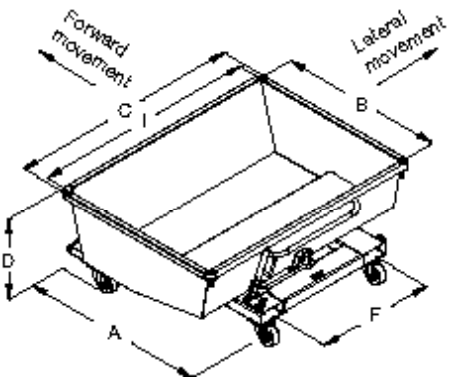



# TIPPING SKIP

## ESSENTIAL - REDUCED-HEIGHT



Automatic release.  
Load capacity = 1000 kg.  
Complete emptying (no filling requirements).  
Low-cost.



### CHARACTERISTICS

- Capacity : 415 to 825 litres
- Bin : 2 and 3 mm sheet metal with reinforcements and 2-ply rims
- Safety latch for transport (disengagement before tipping)
- Rubber bumpers dampen end of tipping process
- Automatically unlocks and tips by pressure and lever for manual tipping
- Fork sleeves and spacing (F) can be modified on request
- Pedestal-mounted models can be used with pallet trucks (under fork sleeves)
- Safety chain included
- Option on request

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
415	1000	-	1255	1090	825	750	790	540	165 x 55	100	GOP04000
415	1000	125	1255	1090	825	750	790	540	165 x 55	108	GOP04120
550	1000	-	1255	1090	1075	1000	790	540	165 x 55	113	GOP05000
550	1000	125	1255	1090	1075	1000	790	540	165 x 55	120	GOP05120
690	1000	-	1255	1090	1325	1250	790	540	165 x 55	126	GOP07000
690	1000	125	1255	1090	1325	1250	790	540	165 x 55	134	GOP07120
825	1000	-	1255	1090	1575	1500	790	540	165 x 55	138	GOP08000
825	1000	125	1255	1090	1575	1500	790	540	165 x 55	146	GOP08120


Dimensions in mm for basic model (for guidance only).

# VITICULTURE TIPPING SKIP

## REDUCED-HEIGHT



Perfect for under presses.  
For all applications with reduced height (shear, massicot, filter presses).  
Prehensible by forks of forklift truck.

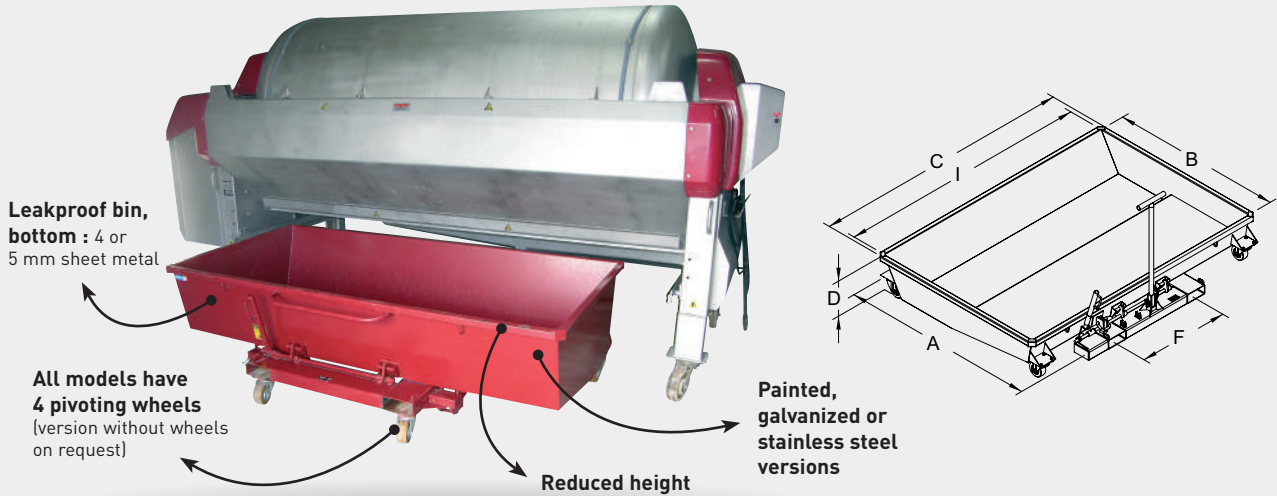

### CHARACTERISTICS

- Capacity : 590 to 1370 litres
- Articulation joints have extra-large bearings and grease nipples
- Safety latch for transport (disengagement before tipping)
- Automatically unlocks and tips on contact (A). Lever for manual tipping (M). See table for details
- Rubber bumpers and springs dampen end of tipping process
- Safety chain included
- Fork sleeves aperture and spacing (F) can be modified on request
- Ø125 mm alu/polyurethane castors. 360 and 450 mm-high skips have a drawbar. 600 mm-high skips have a handrail
- For customised products, please fill in the customization form on page 17
- Available options include: pouring lip, grille with drain and square threaded plug, and polyurethane food-safe paint

Capacity litres	Load kg	Release	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
590	1200	A + M	1280	1100	1585	1500	600	800	170 x 70	170	GSP20421
670	1200	M	1290	1100	2085	2000	450	800	170 x 70	196	GSP21421
785	1200	M	1705	1500	2285	2200	360	800	170 x 70	280	GSP22421
835	1200	M	1290	1100	2585	2500	450	800	170 x 70	235	GSP23421
1075	1200	M	1705	1500	3085	3000	360	800	170 x 70	345	GSP24421
1095	1200	A + M	1680	1500	2085	2000	600	800	170 x 70	275	GSP25421
1370	1200	A + M	1680	1500	2585	2500	600	800	170 x 70	316	GSP26421

Dimensions in mm for basic model (for guidance only). Loaded skip center of gravity at end of forks.



# DUMPING BUCKET WASTE DISPOSAL




# DUMPING BUCKET WITH COMPARTMENTS



Ideal for carrying building waste.  
Low height for emptying into tilting flat-bed trucks.

Ref. GSP90000

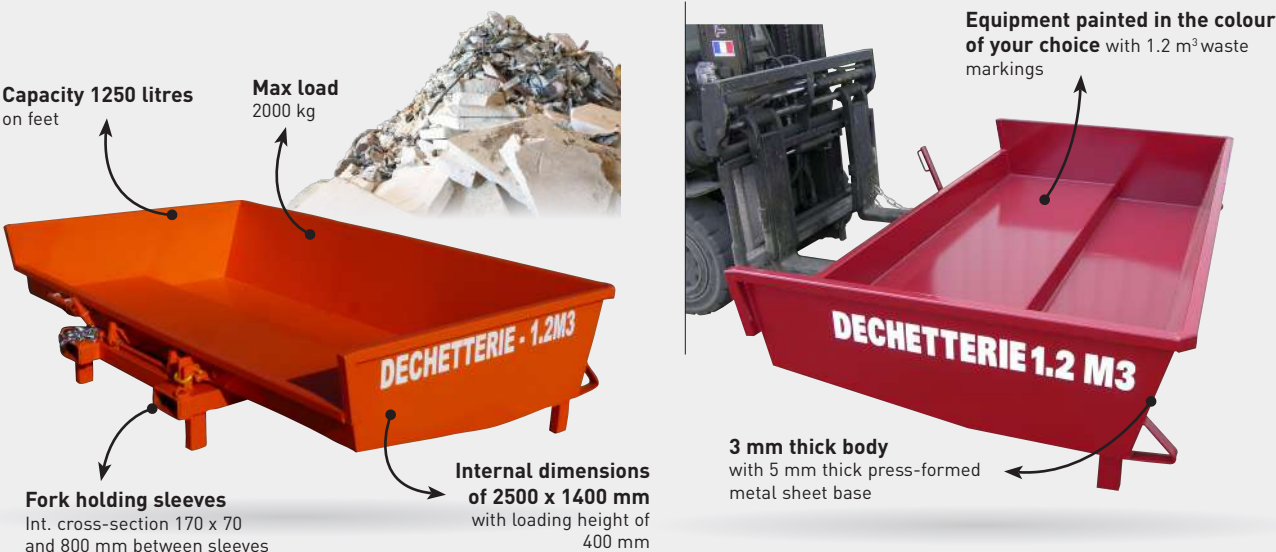

In accordance with the decree of 1st January 2017 implementing Article 93 of the Energy Transition Law published in the Official Journal on 12th March 2016, it is now compulsory to recover building waste.

Tell us your technical requirements and we will make you tailor-made dumping buckets !

Two or three containers on a single chassis.  
Independent tilting by manual control lever.  
Multi-use dumping bucket.  
Painted, galvanized or stainless steel finish.

Version with or without wheels.  
Options on request.  
Made to request.

## TRIPLE BIN VERSION (examples of configurations)



## DOUBLE BIN VERSION (examples of configurations)



### CHARACTERISTICS

- Ref. GSP90000
- Automatic activation of tipping by switch and manual control by lever
- Model on feet with space for pallet truck under the sleeves
- Supplied with one 8 diam. safety chain
- Overall dimensions : 2582 x 1579 x 600 mm high
- With six 10 diam. holes on the base of the body for rainwater drainage
- Weight : 290 kg
- Galvanized version on request
- For a tailor-made product, contact us







# AUTOMATIC SKIP





# AUTOMATIC SKIP ESSENTIAL - LOAD 1000KG



Tips and relocks by forklift mast tilts.  
Automatic release.

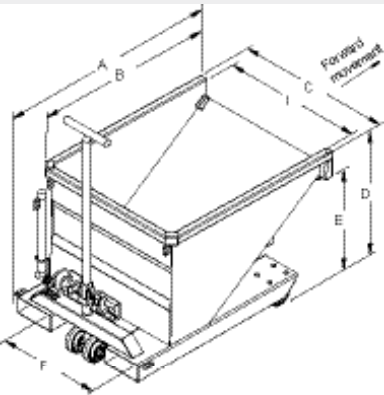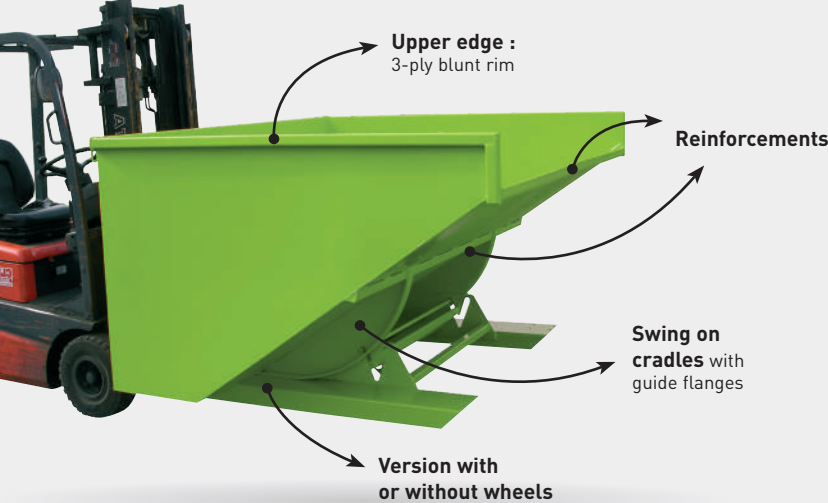

Tips and relocks by forklift mast tilts.  
Automatic release.

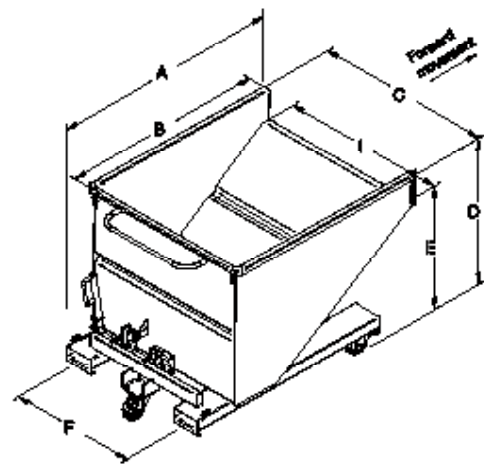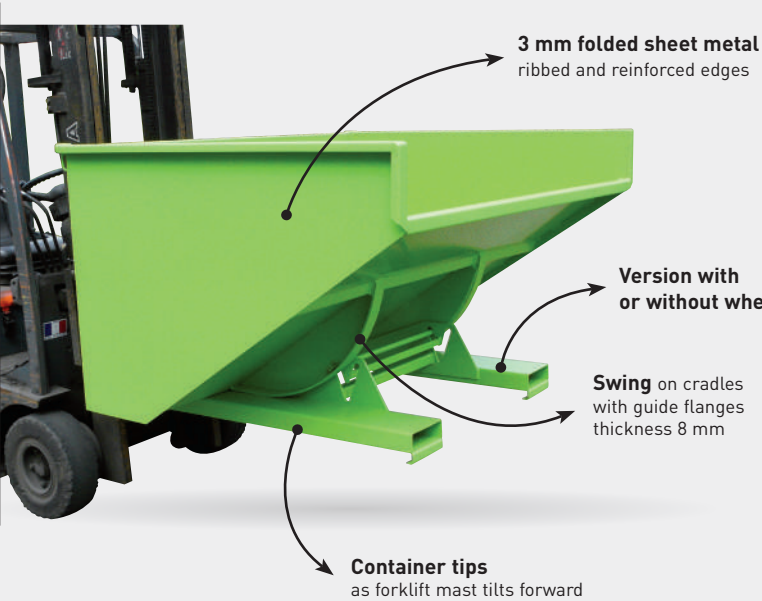

Castor-mounted model with drawbar



Galvanized pedestal-mounted model



Automatic release on contact



Version with 3 wheels and handrail



Automatically unlocks and tips by pressure



Safety tipping latch

## CHARACTERISTICS

- Capacity : 300 to 2550 litres
- Bin : 3 mm sheet metal
- Rigid tubular chassis : 4 mm sheet metal. Guide flanges : 6 or 8 mm sheet metal, integrated end-stop
- Safety latch for transport (disengage before tipping)
- Automatically unlocks and tips on contact (anti-slip device) and lever for manual tipping
- Fork sleeves can be modified on request. Aperture 200 x 80 mm. Spacing : see F in table
- Pedestal-mounted models (except the 300 L model) can be used with pallet trucks (between fork sleeves)
- Castor-mounted models (forward movement) have 2 fixed castors + 2 castors on a directional drawbar
- Safety chain included
- Options on request

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	E	F	Weight kg	Painted ref.
300	1200	-	1180	965	830	750	700	590	545	120	GXP03000
300	1200	125N	1190	965	830	750	770	670	545	130	GXP03120
500	1200	-	1295	1080	1080	1000	790	650	795	155	GXP05000
500	1200	125P	1300	1080	1080	1000	855	720	795	166	GXP05121
850	1500	-	1660	1440	1080	1000	1000	840	795	218	GXP08000
850	1500	160P	1690	1440	1080	1000	1115	960	795	228	GXP08161
1030	1500	-	1660	1440	1280	1200	1000	840	795	230	GXP10000
1030	1500	160P	1690	1440	1280	1200	1105	970	795	243	GXP10161
1270	1800	-	1935	1720	1080	1000	1180	980	795	270	GXP12000
1270	1800	160P	1965	1720	1080	1000	1300	1100	795	285	GXP12161
1530	1800	-	1935	1720	1280	1200	1180	980	795	289	GXP15000
1530	1800	160P	1965	1720	1280	1200	1300	1100	795	300	GXP15161
1910	2000	-	1935	1720	1580	1500	1180	980	795	314	GXP18000
1910	1800	160P	1965	1720	1580	1500	1300	1100	795	326	GXP18161
2550	2000	-	1935	1720	2080	2000	1180	980	795	360	GXP25000
2550	1800	160P	1965	1720	2080	2000	1300	1100	795	373	GXP25161

Dimensions in mm for basic model (for guidance only). Castors : N = Nylon, P = alu/polyurethane

## CHARACTERISTICS

- Capacities from 510 to 1020 litres
- Automatically unlocks and tips on contact with container or manually using lever
- Fork sleeves aperture 165 x 55 mm and spacing (F) can be modified on request
- Pedestal mounted models can be used with pallet trucks between fork sleeves (except the 500 litres model)
- Castor-mounted models equipped with 2 fixed castors and 1 pivoting castor Ø125 nylon, with handrail
- Safety chain included
- Options on request

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	E	F	Weight kg	Painted ref.
510	1000	-	1430	1230	835	750	940	745	540	160	XOP05000
510	1000	125	1430	1230	835	750	1065	870	540	165	XOP05123
680	1000	-	1430	1230	1085	1000	940	745	760	178	XOP07000
680	1000	125	1430	1230	1085	1000	1065	870	760	183	XOP07123
850	1000	-	1430	1230	1335	1250	940	745	760	192	XOP08000
850	1000	125	1430	1230	1335	1250	1065	870	760	197	XOP08123
1020	1000	-	1430	1230	1585	1500	940	745	760	205	XOP10000
1020	1000	125	1430	1230	1585	1500	1065	870	760	210	XOP10123

Dimensions in mm for basic model (for guidance only).



# TIPPING SKIP

## POLYETHYLENE




# TIPPING SKIP

## HIGH-CAPACITY



Corrosion proof.  
Ideal for liquids or wet products.  
Painted, galvanized or stainless steel chassis.

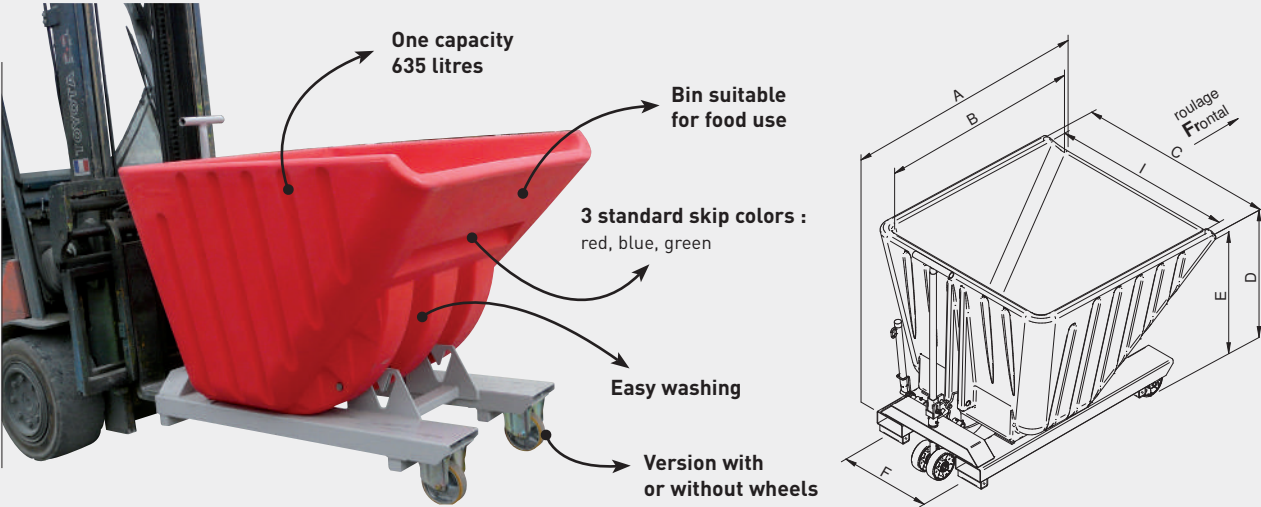


### CHARACTERISTICS

- Load capacity : 1000 kg
- Robust, double-walled, PE skip thickness 8 mm
- Safety tipping lock prevents unintended use
- Tipping starts automatically on contact and manually by pulling the lever
- Skip is tipped by tilting the forklift mast forward
- Automatically returns to locked position when tilting mast backwards
- Fork sleeves : Aperture : 170 x 70 mm. Spacing (F) : 560 mm
- Pedestal mounted models (no use of pallet truck)
- Castor-mounted models have 2 fixed and 2 twinned castors, Ø160 aluminium polyurethane with steering bar – front movement
- Options: mounting onto nylon, treaded or steel wheels, attachment of coupling bar

Capacity litres	Load kg	Castors Ø	Skip color	A	B	C	I	D	E	F	Weight kg	Painted chassis ref.
635	1000	-	red	1510	1200	1200	1080	1035	945	560	150	GMP03000
635	1000	160	red	1510	1200	1200	1080	1120	1030	560	162	GMP03161
635	1000	-	blue	1510	1200	1200	1080	1035	945	560	150	GMP05000
635	1000	160	blue	1510	1200	1200	1080	1120	1030	560	162	GMP05161
635	1000	-	green	1510	1200	1200	1080	1035	945	560	150	GMP06000
635	1000	160	green	1510	1200	1200	1080	1120	1030	560	162	GMP06161

Dimensions in mm for basic model (for guidance only).

High-capacity.  
For low-density, voluminous or bulky waste.

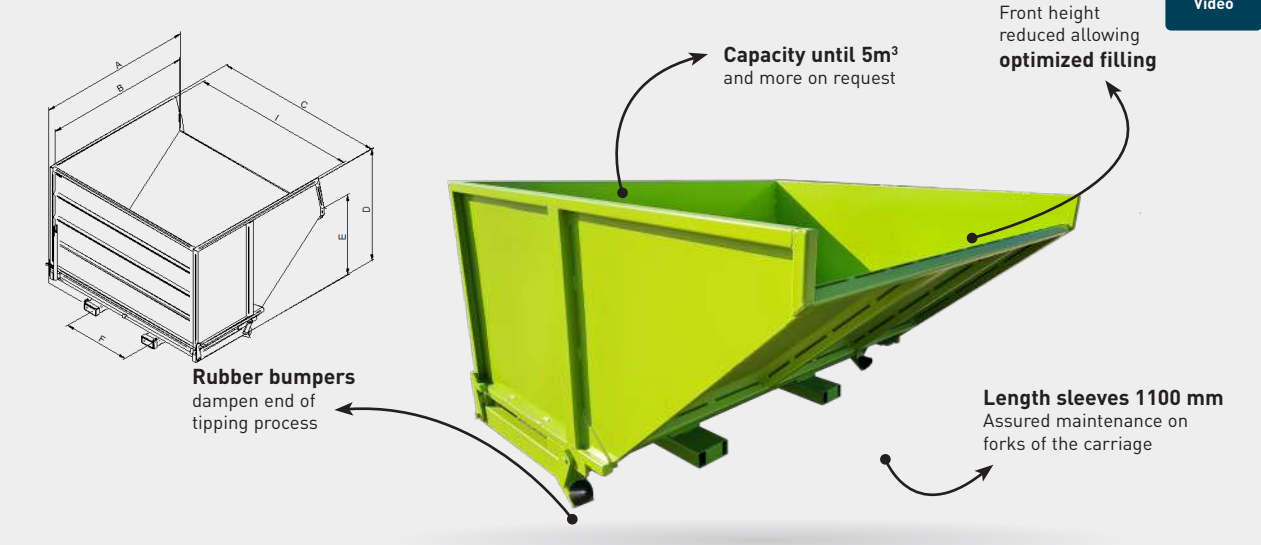

### CHARACTERISTICS

- Capacity : 1300 to 4600 litres
- Bin : 3 mm sheet metal with reinforcements
- Upper edge : 3-ply blunt rim
- Safety latch for transport (disengage before tipping)
- Lever for manual tipping (automatic on request)
- Fork sleeves : reinforced entry points, aperture 170 x 70 mm and fork spacing (F) can be modified on request
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Wheeled model with 2 fixed and 2 swivelling wheels with handrail - front wheel drive
- Options: sliding lid, hydraulic tilting...

Capacity litres	Load kg	Wheels Ø	A	B	C	I	D	E	F	Weight kg	Painted ref.
90 series - Int. bin height 900 mm											
1300	2000	-	2000	1855	1155	1000	1190	1055	730	308	AGP13000
1300	2000	160F	2020	1855	1155	1000	1395	1260	730	330	AGP13162
2000	2000	-	2000	1855	1630	1500	1190	1055	900	362	AGP20000
2000	2000	200F	2020	1855	1630	1500	1290	1155	640	416	AGP20202
2600	2300	-	2000	1855	2130	2000	1190	1055	900	440	AGP30000
2600	2300	200F	2020	1855	2085	2000	1290	1155	900	495	AGP30202
130 series - Int. bin height 1300 mm											
3800	2600	-	2090	1945	2130	2000	1510	1130	900	502	AGP40000
3800	2400	200F	2115	1945	2130	2000	1610	1225	900	556	AGP40202
130 series - Int. bin height 1300 mm											
4600	3000	-	2090	1950	2330	2200	1610	1125	900	569	AGP50000
4600	2400	200F	2115	1950	2330	2200	1710	1225	900	616	AGP50202

Dimensions in mm for basic model (for guidance only). Centre of gravity (1200 forks) = 1000




# TIPPING SKIP WITH LIFTING BEAM



# LIFTING BEAM FOR EMPTYING CP SKIPS



For use with PL lifting beam (emptying).  
Economical.  
Smooth sides.

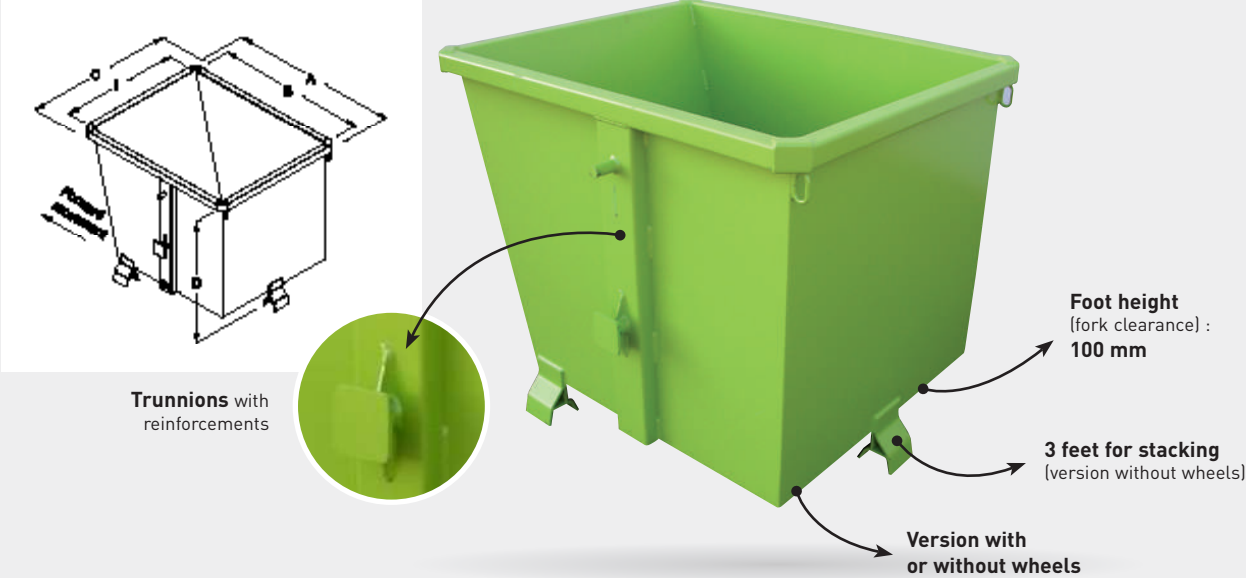

## CHARACTERISTICS

- Capacity : 575 to 1000 litres
- PL lifting beam inverts and empties skip
- Bin : 3 mm reinforced sheet metal
- Smooth sides and sloped front panel facilitate emptying and maintenance
- Fixed-mounted models (3 feet) designed for stacking (3 levels max)
- Castor-mounted models (non-stackable - forward movement) have 2 fixed + 2 pivoting Ø125 alu/polyurethane castors and a handrail
- Options on request

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	Weight kg	Painted ref.
575	2000	-	1110	1000	990	800	900	108	CPP06000
575	1200	125	1165	1000	990	800	965	117	CPP06121
700	2000	-	1310	1200	990	800	900	120	CPP07000
700	1200	125	1365	1200	990	800	965	129	CPP07121
880	2000	-	1310	1200	1190	1000	900	134	CPP09000
880	1200	125	1365	1200	1190	1000	965	143	CPP09121
1000	2000	-	1310	1200	1330	1140	900	143	CPP10000
1000	1200	125	1365	1200	1330	1140	965	152	CPP10121

Dimensions in mm for basic model (for guidance only).

Handling by forks of forklift truck.  
2 models : Upper and lower grip.  
Approved by body of control.

**! ATTENTION :** Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.



## PL model UPPER GRIP SYSTEM




## CHARACTERISTICS

- Standard model used with a CP bin
- Support foot for horizontal stability

Capacity litres skip CP	L	C	K	F	Fork sleeves ins.	Weight kg	Painted ref.
575	1395	1080	1745	765	170 x 70	60	PLP09000
700	1495	1080	1825	765	170 x 70	60	PLP09000
880	1495	1280	1825	765	170 x 70	65	PLP10000
1000	1495	1420	1825	765	170 x 70	76	PLP11000

Fork sleeves and spacing F can be modified on request - Dimensions in mm for basic model (for guidance only)

## PL model LOWER GRIP SYSTEM

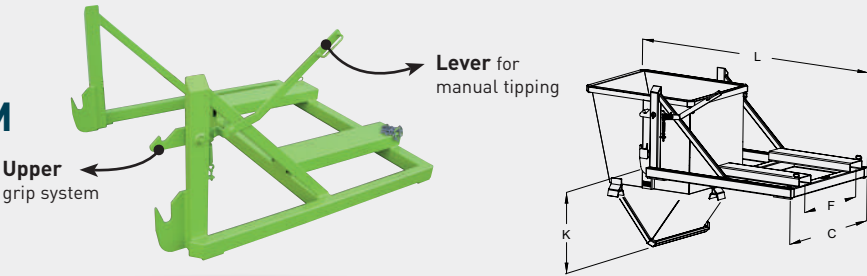

## CHARACTERISTICS

- Use this model when forklift height is insufficient
- Centre of gravity : 1750 mm (check forklift load capacity)

Capacity litres skip CP	L	C	K	F	Fork sleeves ins.	Weight kg	Painted ref.
575	2205	1185	715	785	170 x 70	110	PLP20000
700	2305	1185	855	785	170 x 70	110	PLP20000
880	2305	1380	855	785	170 x 70	114	PLP30000
1000	2305	1520	855	785	170 x 70	117	PLP40000

Fork sleeves and spacing F can be modified on request - Dimensions in mm for basic model (for guidance only)






# SKIP WITH LIFTING BEAM ATTACHMENT AND HANDLE




# TIPPING FRAME



For use with jib crane or bridge crane.  
Secure emptying by inversion.

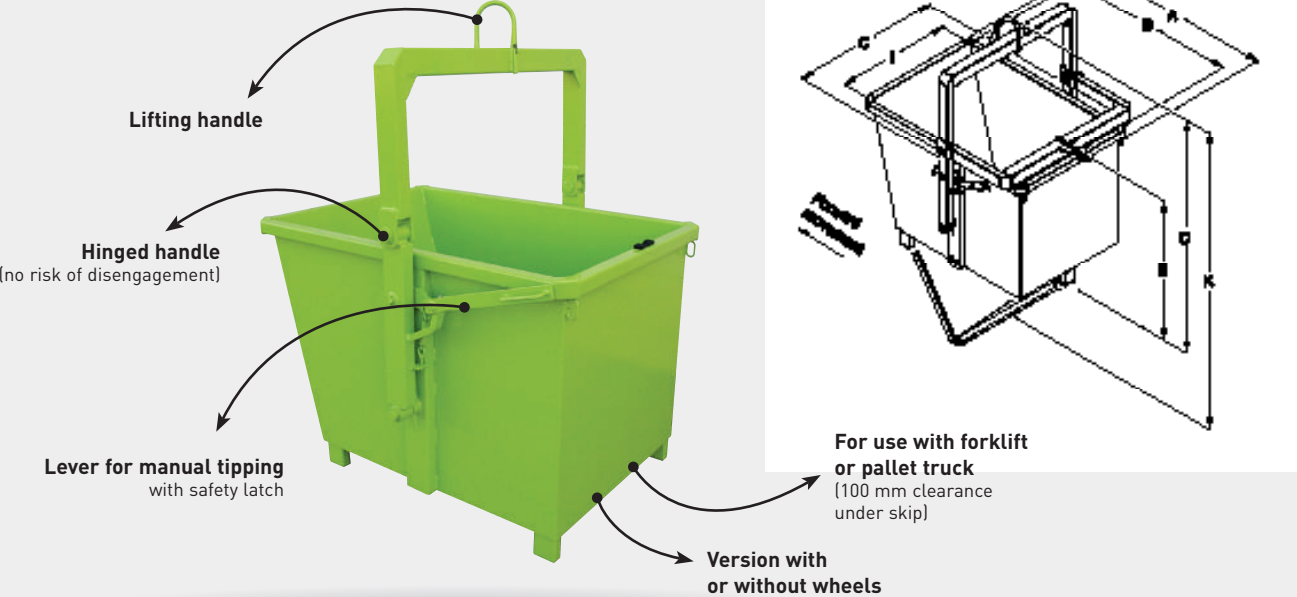

Suitable for transporting long products.  
Timber slabs, cardboard, mandrels, etc.

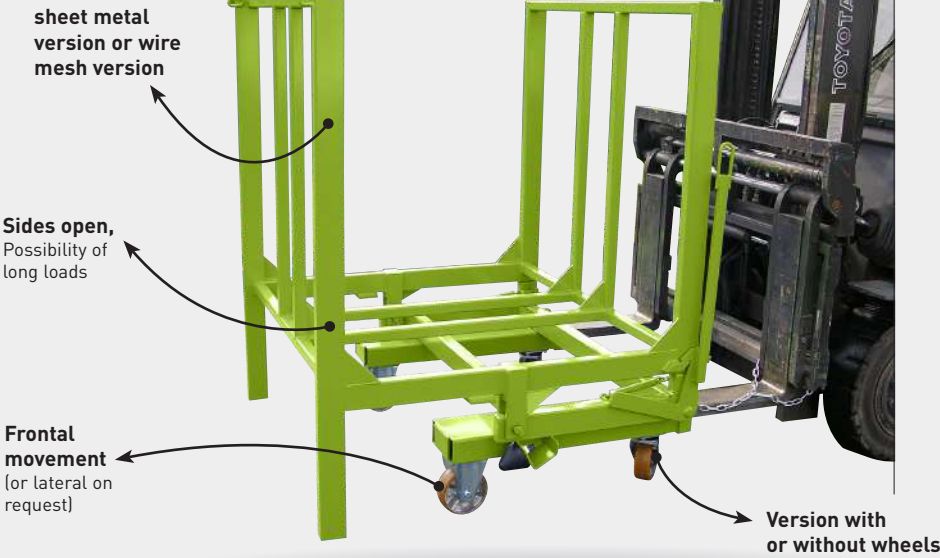

## CHARACTERISTICS

- Volume : 1300 dm<sup>3</sup>
- Tubular frame with gusset plates
- Safety latch for transport (disengage before tipping)
- Lever for manual tipping
- Fork sleeves can be modified on request. 5mm sheet metal. Aperture : 170 x 70mm. Spacing : 900mm.
- Pedestal-mounted models can be used with pallet trucks between fork sleeves
- Castor-mounted models (forward movement) have 2 fixed + 2 pivoting Ø160mm alu/polyurethane castors and a handrail
- Safety chain included
- For customised products, please contact us.
- Options on request

Capacité dm <sup>3</sup>	Load kg	Castors Ø	Latéral		Frontal		Overall height	Weight kg	Painted ref.
			Overall	Interior	Overall	Interior			
1300	2000	-	1265	1050	1300	1200	1400	148	GCP00000
1300	1800	160	1265	1050	1300	1200	1520	160	GCP00161

Dimensions in mm for basic model (for guidance only).

## CHARACTERISTICS

- Capacity : 575 to 1000 litres
- Bin : 3 mm reinforced sheet metal
- Interior bin height : 800 mm
- Model without castor
- Castor-mounted models (forward movement) have 2 fixed + 2 pivoting Ø125 mm alu/polyurethane castors and a handrail

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	K	E	Weight kg	Painted ref.
575	1500	-	1310	1000	1130	795	1620	2025	1015	138	GCP06000
575	1200	125	1310	1000	1130	795	1690	2025	1090	150	GCP06121
700	1500	-	1410	1200	1130	795	1620	2105	1015	150	GCP07000
700	1200	125	1410	1200	1130	795	1690	2105	1090	162	GCP07121
880	1500	-	1410	1200	1330	995	1620	2105	1015	165	GCP09000
880	1200	125	1410	1200	1330	995	1690	2105	1090	180	GCP09121
1000	1500	-	1410	1200	1470	1135	1620	2105	1015	176	GCP10000
1000	1200	125	1410	1200	1470	1135	1690	2105	1090	190	GCP10121

Dimensions in mm for basic model (for guidance only).





# OPEN TIPPING SKIP



# OPEN TIPPING SKIP FOR HEAVY LOADS



For flat products.  
Automatic release.  
Open side facilitates stacking products (perfect for flattened boxes).

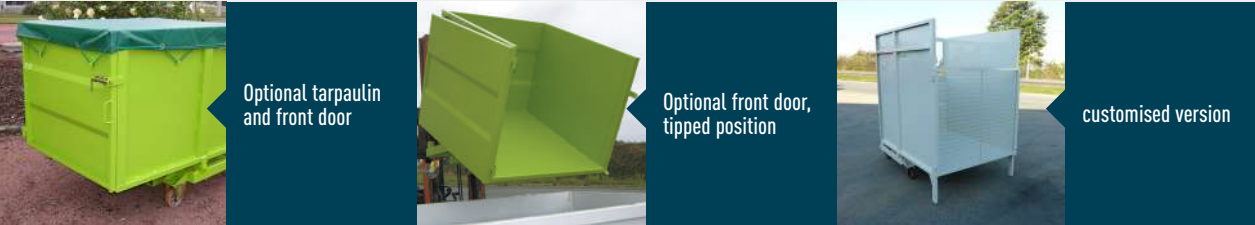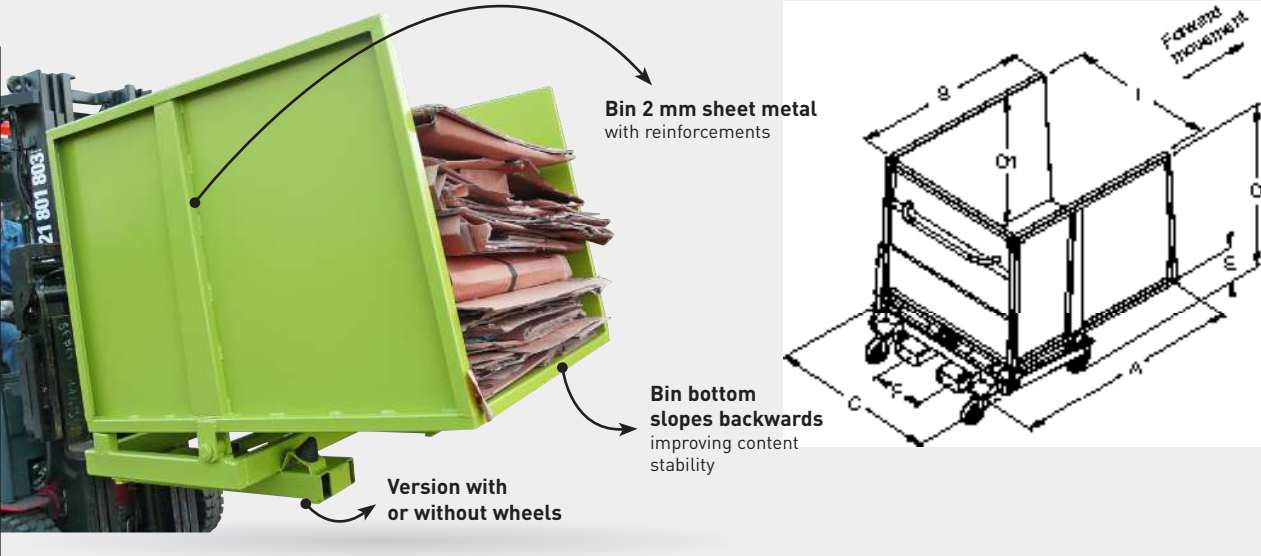


## CHARACTERISTICS

- Capacity : 1150 to 2000 dm<sup>3</sup>
- Safety latch for transport (disengage before tipping)
- Automatically unlocks and tips on contact (anti-slip device). Lever for manual tipping
- Fork sleeves can be modified on request. 5 mm sheet metal. Aperture : 170 x 70 mm. Spacing : see F in table
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Castor-mounted models (forward movement) have 2 fixed + 2 pivoting Ø150 mm alu/polyurethane castors and a handrail
- Safety chain included
- Options on request


Capacity dm <sup>3</sup>	Load kg	Castors Ø	A	B	C	I	D	D1	E	F	Weight kg	Painted ref.
1150	1200	-	1470	1280	1125	1000	1230	930	315	740	197	BCP11000
1150	1200	150	1550	1280	1125	1000	1340	930	430	350	210	BCP11151
1365	1200	-	1470	1280	1325	1200	1230	930	315	740	210	BCP13000
1365	1200	150	1550	1280	1325	1200	1340	930	430	550	224	BCP13151
1700	1200	-	1470	1280	1325	1200	1460	1160	315	740	228	BCP16000
1700	1200	150	1550	1280	1325	1200	1570	1160	430	550	240	BCP16151
2000	1200	-	1470	1280	1525	1400	1460	1160	315	740	240	BCP19000
2000	1200	150	1550	1280	1525	1400	1570	1160	430	740	253	BCP19151

Dimensions in mm for basic model (for guidance only).

Perfect for sheep metal frames and other flat products.  
Automatic release.  
Reinforced for heavy loads.

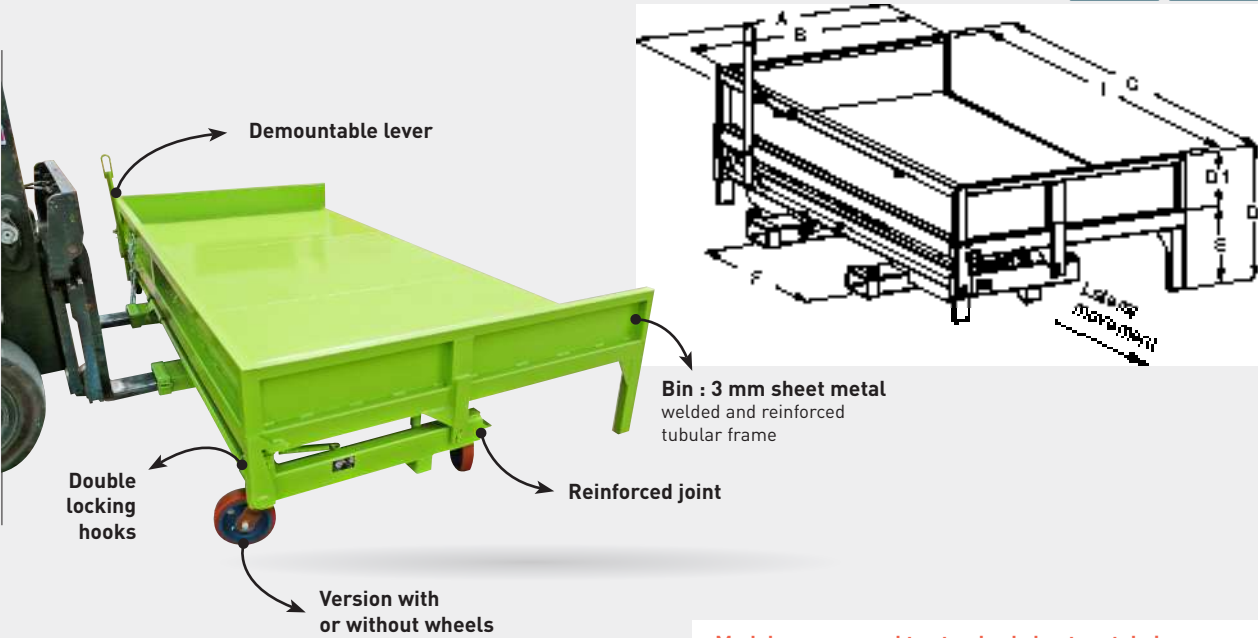

Models correspond to standard sheet metal sizes : 1000 x 2000, 1250 x 2500 and 1500 x 3000. (Other sizes and loads available on request)

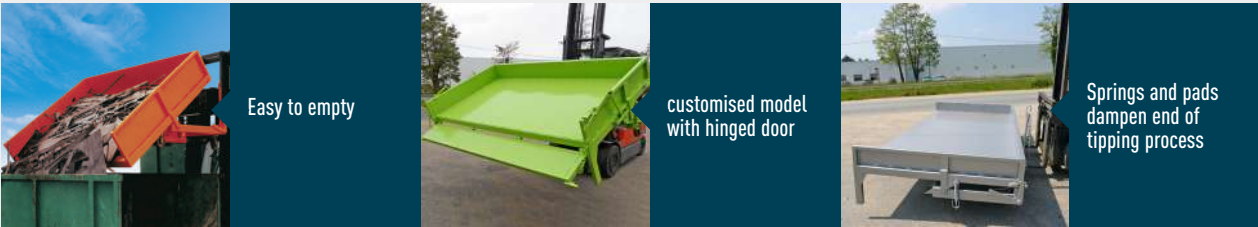

## CHARACTERISTICS

- Capacity : 580 to 990 dm<sup>3</sup>
- Automatically unlocks and tips on contact. Lever for manual tipping
- Fork sleeves can be modified on request : 5 mm sheet metal. Aperture 170 x 70 mm and spacing (F) : 900 mm
- Model without wheels can't be used with pallet truck
- Castor-mounted models (lateral movement) have 2 fixed + 2 pivoting cast iron/polyurethane castors on chassis
- Options on request

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	D1	E	F	Fork CG	Weight kg	Painted ref.
580	2500	-	1295	1100	2230	2100	620	250	370	900	920	320	SQP06000
580	2250	160	1295	1100	2230	2100	715	250	465	900	920	340	SQP06162
880	2500	-	1535	1350	2730	2600	620	250	370	900	940	396	SQP09000
880	2250	160	1535	1350	2730	2600	715	250	465	900	940	417	SQP09162
990	3000	-	1785	1600	3230	3100	570	200	370	900	920	470	SQP10000
990	2800	200	1785	1600	3230	3100	710	200	510	900	920	507	SQP10202

Dimensions in mm for basic model (for guidance only).




# TIPPING SKIP WITH FRONT DOOR



## OPTIONS AND FUNCTIONS OF USE

Minimum bulk - maximum capacity.  
Perfect for collecting wood scraps, sawdust, bark etc...

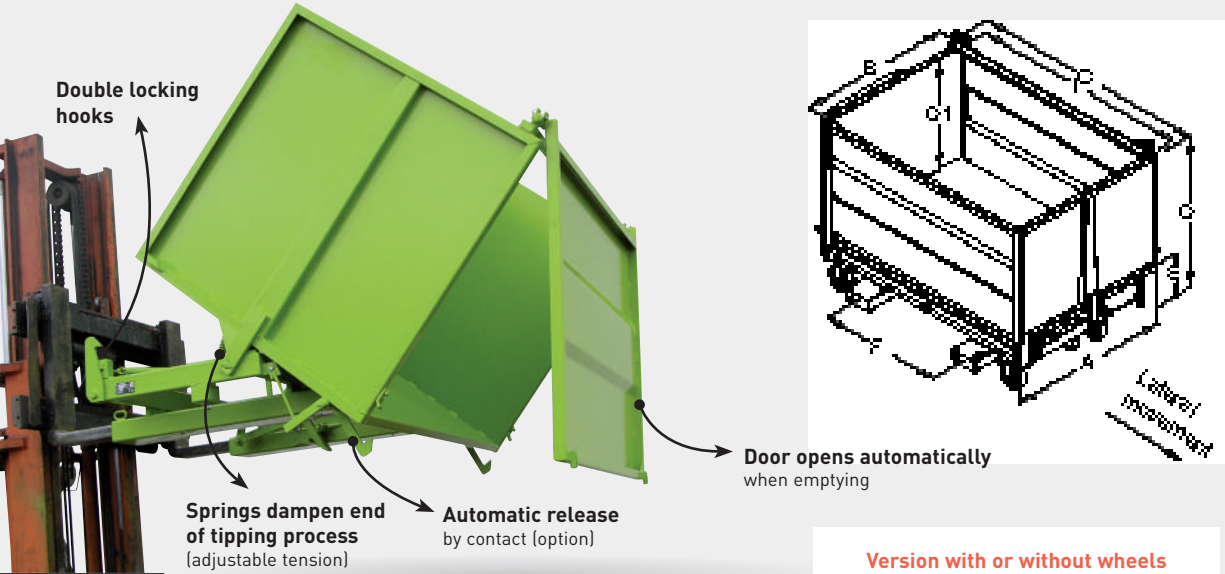

### CHARACTERISTICS

- Capacity : 1000 to 4800 litres
- Bin : 3 mm sheet metal with side bars and pleats
- Bin emptying angle : 43°
- Lever for manual tipping
- Safety latches on lever and door for transport (disengage before tipping)
- Fork sleeves can be modified on request. Aperture: 170 x 70 mm. Spacing : see F in table
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Castor-mounted models have 2 fixed + 2 pivoting castors and a handrail
- Safety chain included
- Options on request

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	D1	F	Weight kg	Painted ref.
1000	2000	-	1240	1030	1400	1250	1160	772	900	260	BNP10000
1000	1800	160P	1240	1030	1445	1250	1260	772	600	276	BNP10161
1200	2000	-	1240	1030	1650	1500	1160	772	900	286	BNP12000
1200	1800	160P	1240	1030	1700	1500	1260	772	850	300	BNP12161
1570	2000	-	1200	1000	1650	1500	1425	1040	900	320	BNP15000
1570	1800	160P	1200	1000	1700	1500	1525	1040	850	337	BNP15161
2100	2000	-	1200	1000	2150	2000	1425	1040	900	375	BNP20000
2100	1800	160P	1200	1000	2200	2000	1525	1040	900	390	BNP20161
2700	2500	-	1520	1300	2150	2000	1435	1040	900	430	BNP27000
2700	2400	200C	1520	1300	2200	2000	1565	1040	900	460	BNP27202
3500	2800	-	1520	1300	2150	2000	1715	1330	900	487	BNP35000
3500	2400	200C	1520	1300	2200	2000	1855	1330	900	519	BNP35202
4800	3500	-	2100	1795	2165	2000	1740	1330	900	614	BNP50000

Castors: P= Alu/polyurethane, C=Cast iron/polyurethane - Dimensions in mm for basic model (for guidance only).






# LOW TIPPING SKIP WITH FRONT DOOR



# SLOPED -BOTTOM SKIP WITH FRONT DOOR




Perfect for collecting wood scraps, glass, sawdust and dust.  
Work table height.

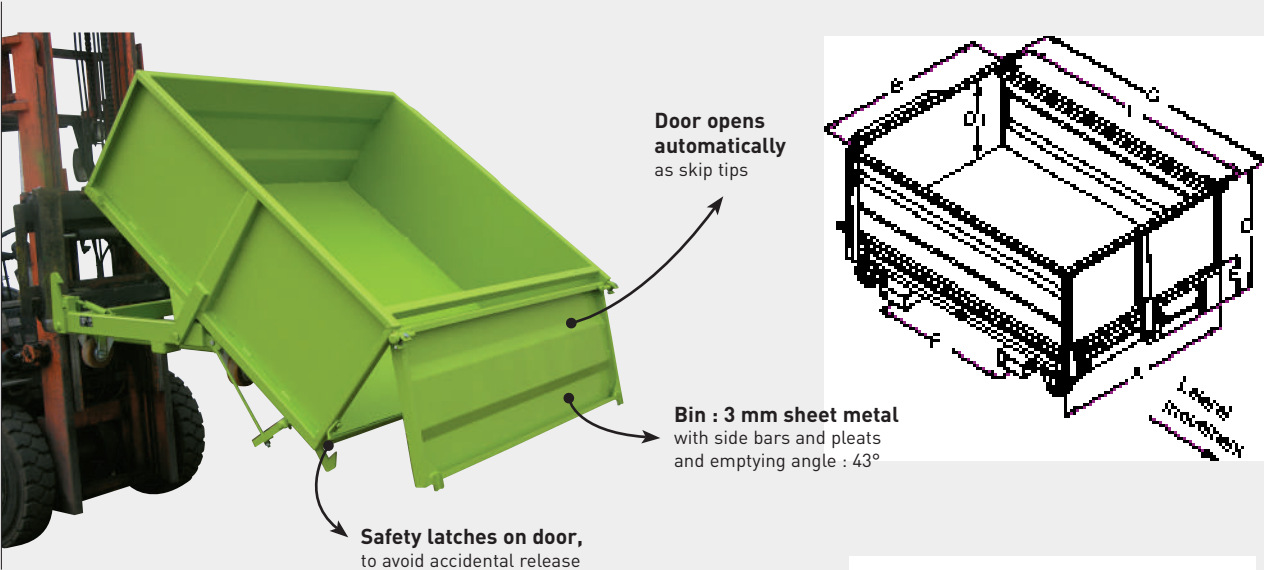

Version with or without wheels

Emptying at dock, on pit or from flatbed vehicle.  
For use with or without forklift.  
120° sloped bottom.

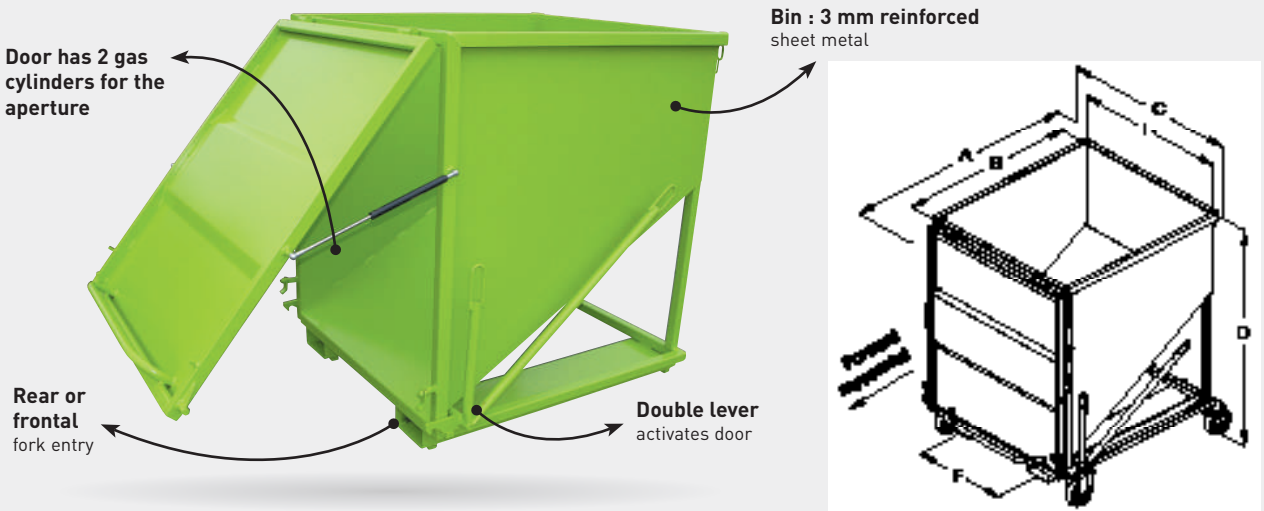

Version with or without wheels



## CHARACTERISTICS

- Capacity : 410 to 1300 litres
- Lever for manual tipping (option: automatic release possible)  
Safety latches on lever
- Springs dampen end of tipping process (adjustable tension)
- Fork sleeves can be modified on request.  
Aperture : 170 x 70 mm.  
Spacing : see F in table
- Pedestal-mounted models or castor-mounted models have 2 fixed and 2 pivoting alu/polyurethane castors and a handrail
- Options: lid with ferrule, leak proof door and visualization window (see BN range)

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	D1	F	Weight kg	Painted ref.
410	1500	-	1000	814	1150	1000	780	495	730	168	BSP05000
410	1200	125	1000	814	1195	1000	850	495	380	180	BSP05121
660	1500	-	1200	1030	1400	1250	780	495	900	210	BSP07000
660	1200	125	1200	1030	1445	1250	850	495	630	223	BSP07121
790	1500	-	1250	1030	1650	1500	780	495	900	230	BSP09000
790	1200	125	1250	1030	1695	1500	850	495	850	243	BSP09121
990	1500	-	1510	1296	1650	1500	780	495	900	268	BSP11000
990	1200	125	1510	1296	1695	1500	850	495	850	280	BSP11121
1050	1500	-	1250	1030	2150	2000	780	495	900	279	BSP12000
1050	1200	125	1250	1030	2200	2000	850	495	900	290	BSP12121
1300	2000	-	1510	1296	2150	2000	780	495	900	318	BSP16000
1300	1200	150	1510	1296	2200	2000	890	495	900	330	BSP16151

Dimensions in mm for basic model (for guidance only).

## CHARACTERISTICS

- Capacity : 500 to 2000 litres
- Safety latch for transport (disengage before tipping)
- Lever and handle facilitate door closing.
- Fork sleeves can be modified on request.  
5 mm sheet metal. Aperture : 170 x 70 mm.  
Spacing : see F in table
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Castor-mounted models (forward movement) have 2 fixed + 2 pivoting alu/polyurethane castors and a handrail
- Safety chain included
- Option : Automatic release by contact
- Automatic door release optional

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	F	Fork pocket aperture	Weight kg	Painted ref.
500	1500	-	1335	1160	1180	1000	900	740	170 x 70	177	FPP05000
500	1200	150	1420	1160	1195	1000	1010	580	170 x 70	186	FPP05151
1000	2000	-	1335	1160	1180	1000	1340	740	170 x 70	227	FPP10000
1000	1800	160	1418	1160	1195	1000	1455	580	170 x 70	240	FPP10161
1520	2000	-	1336	1160	1680	1500	1355	740	170 x 70	279	FPP15000
1520	1800	160	1418	1160	1690	1500	1470	740	170 x 70	290	FPP15161
2000	2000	-	1336	1160	2180	2000	1355	740	170 x 70	338	FPP20000
2000	1800	160	1418	1160	2190	2000	1470	740	170 x 70	350	FPP20161

Dimensions in mm for basic model (for guidance only).




# DROP BOTTOM SKIP WITH HEEL CAGE SAFETY




# DROP BOTTOM SKIP HINGED STIRRUP SAFETY



Full bottom emptying.  
Best size/capacity ratio.  
With patented heel cage safety - no risk of disengaging.

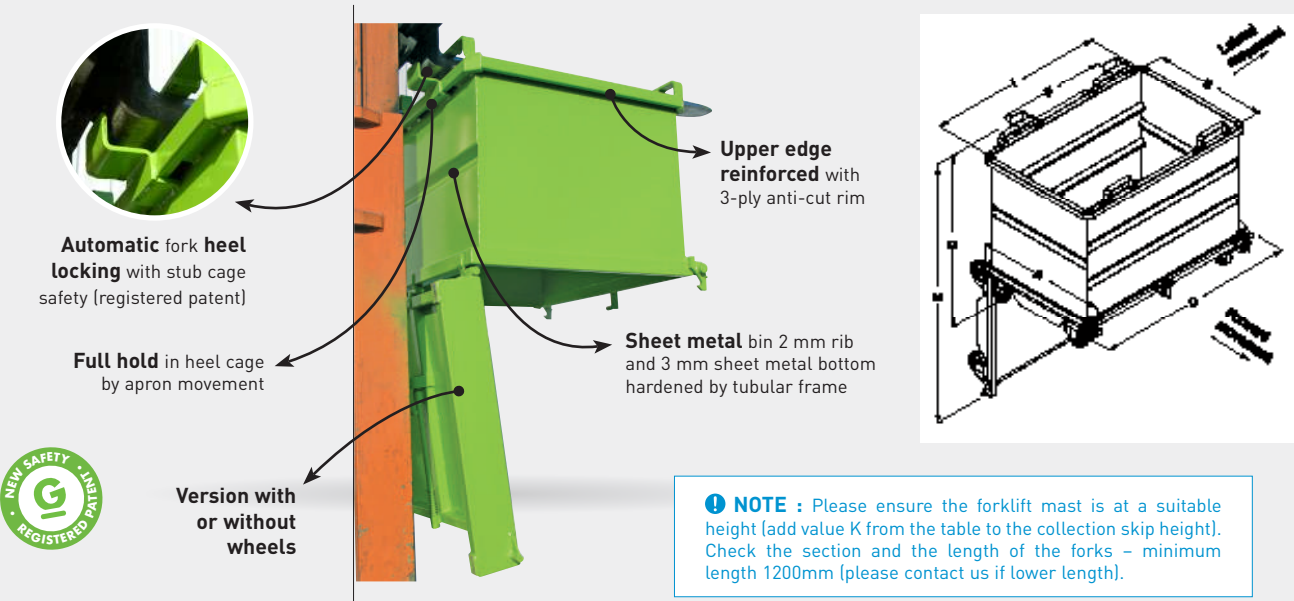

Full bottom emptying.  
Best size/capacity ratio.  
Automatically unlocks.

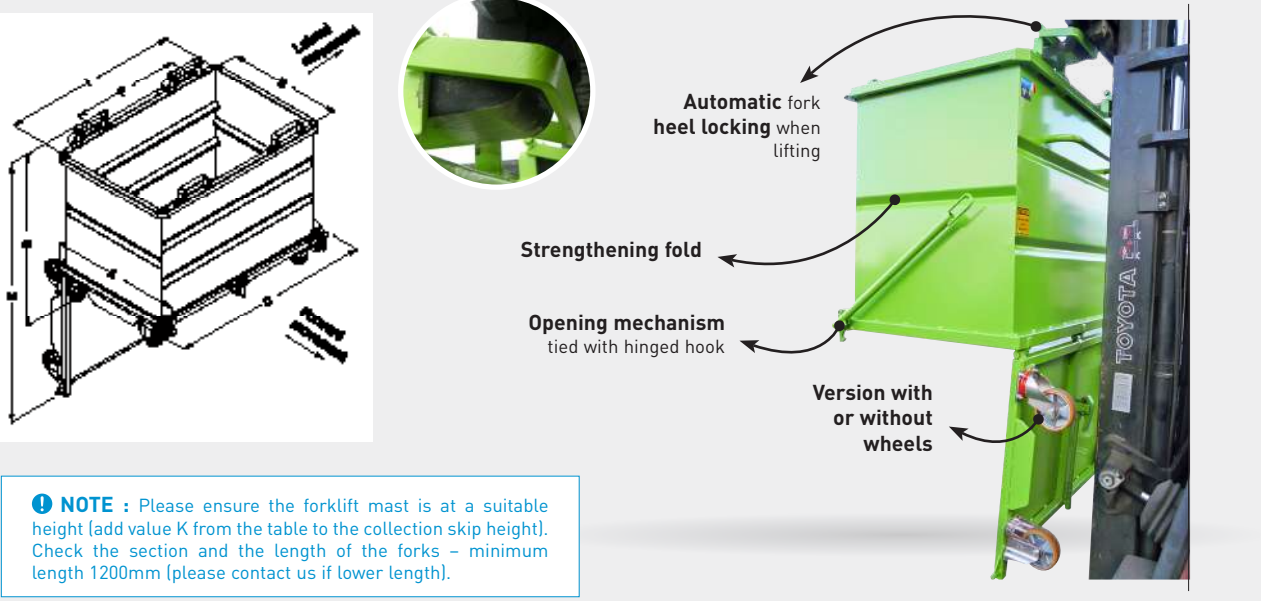

## CHARACTERISTICS

- Capacity : 515 to 2075 litres
- Upper lifting lugs, aperture : 160 x 60 and spacing (F) 700 mm
- Opening mechanism tied with hinged hook
- Automatically unlocks and tips on contact, lever for manual tipping
- Safety latch preventing any unintentional use
- Models without wheels for use with pallet truck
- Caster mounted models have 2 fixed and 2 pivoting castors and a handrail Forward movement except for 2075 L which has lateral motion
- For customised or reinforced versions, please contact us

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	K	Weight kg	Painted ref.
515	1500	-	1010	800	1145	1000	880	1620	125	CAP05000
515	1200	125N	1005	800	1145	1000	930	1620	130	CAP05120
830	1500	-	1000	800	1395	1250	1070	1810	155	CAP08000
830	1200	125N	1005	800	1395	1250	1120	1810	160	CAP08120
1000	1500	-	1010	800	1345	1200	1280	2020	165	CAP10000
1000	1200	150P	1005	800	1345	1200	1380	2020	175	CAP10151
1400	1500	-	1100	900	1395	1250	1425	2265	185	CAP14000
1400	1200	150P	1105	900	1395	1250	1520	2265	195	CAP14151
2075	2000	-	1220	1000	1945	1800	1390	2350	255	CAP20000
2075	1800	160P	1225	1000	1980	1800	1490	2350	267	CAP20161

Castors : N = Nylon, P = alu/polyurethane - Dimensions in mm for basic model (for guidance only).

## CHARACTERISTICS

- Capacity : 515 to 2075 litres
- Upper lifting lugs, aperture : 200 x 65 and spacing (F) 780 mm
- Sheet metal bin 2 mm rib, and 3 mm sheet metal bottom hardened by tubular frame
- Upper edge reinforced with 3-ply anti-cut rim
- Safety latch preventing any unintentional use
- Model without wheels for use with pallet truck
- Caster mounted models have 2 fixed and 2 pivoting castors and a handrail Forward movement except for 2075L which has lateral motion
- For customised or reinforced versions, please contact us
- Options : see P.40


Capacity litres	Load kg	Castors Ø	A	B	C	I	D	K	Weight kg	Painted ref.
515	1500	-	1000	800	1145	1000	920	1620	125	FAP05000
515	1200	125N	1005	800	1145	1000	970	1620	130	FAP05120
830	1500	-	1000	800	1395	1250	1110	1810	155	FAP08000
830	1200	125N	1005	800	1395	1250	1165	1810	160	FAP08120
1000	1500	-	1000	800	1345	1200	1320	2020	165	FAP10000
1000	1200	150P	1005	800	1345	1200	1420	2020	175	FAP10151
1400	1500	-	1100	900	1395	1250	1465	2265	185	FAP14000
1400	1200	150P	1105	900	1395	1250	1565	2265	195	FAP14151
2075	2000	-	1220	1000	1945	1800	1430	2350	255	FAP20000
2075	1800	160P	1225	1000	1980	1800	1530	2350	267	FAP20161

Castors : N = Nylon, P = alu/polyurethane - Dimensions in mm for basic model (for guidance only).



OPTIONS  
AND FUNCTIONS OF USE


FAP CAP

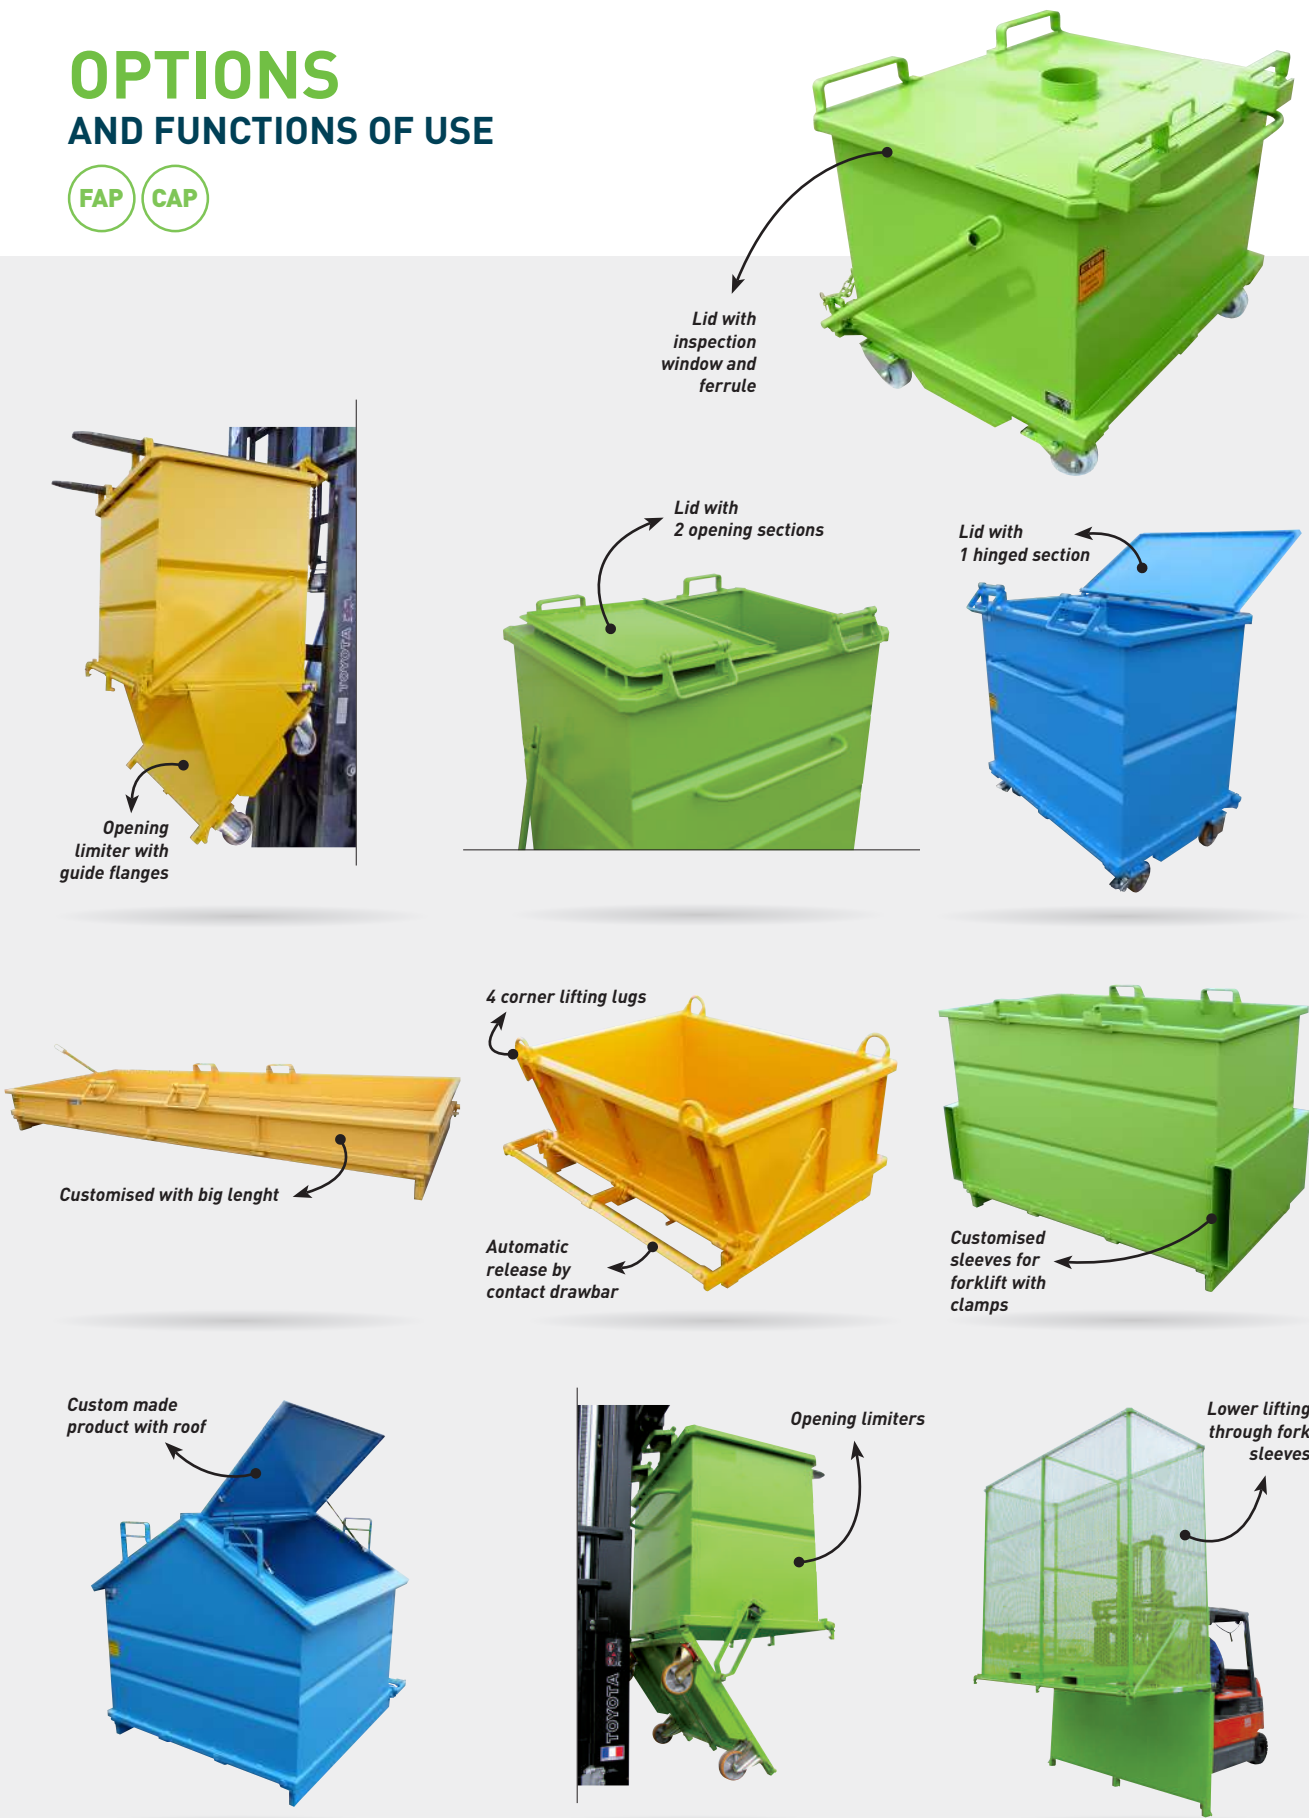


DROP-BOTTOM SKIP  
ESSENTIAL – WORKING LOAD 1000KG



Economical.  
Simplicity, reliability.

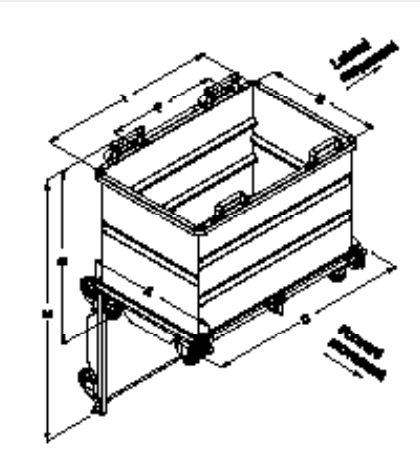

NOTE : Please ensure the forklift mast is at a suitable height (add value K from the table to the collection skip height). Check the section and the length of the forks – minimum length 1200mm (please contact us if lower length).

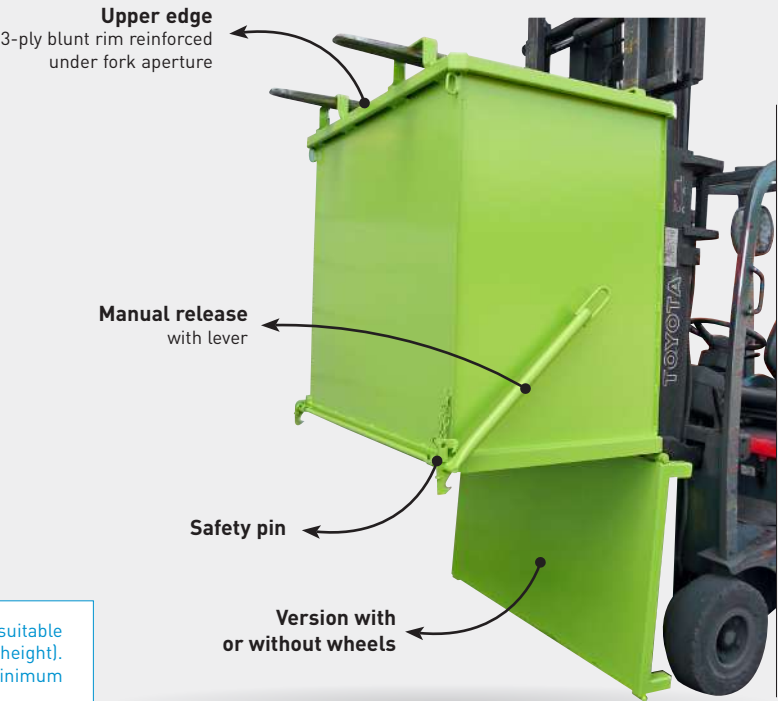

CHARACTERISTICS										
<ul style="list-style-type: none"><li>— 3 capacities : 500, 800, 1000 litres</li><li>— Sheet metal bin 2 mm rib with reinforced corners</li><li>— Upper fork aperture 200 x 80 mm. 700 mm fork spacing (F)</li><li>— Caster-mounted model equipped with 2 fixed and 2 pivoting Ø 125 nylon casters (forward movement)</li><li>— One safety chain included</li></ul>										

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	K	Weight kg	Painted ref.
500	1000	-	865	750	1335	1185	735	1405	90	FEP05000
500	1000	125N	865	750	1335	1185	800	1405	98	FEP05120
800	1000	-	865	750	1335	1185	1125	1792	110	FEP08000
800	1000	125N	865	750	1335	1185	1185	1792	118	FEP08120
1000	1000	-	865	750	1335	1185	1345	2012	125	FEP10000
1000	1000	125N	865	750	1335	1185	1405	2012	133	FEP10120

Dimensions in mm for basic model (for guidance only).



# DROP-BOTTOM SKIP WITH POLYETHYLENE LID



# REINFORCED DROP BOTTOM SKIP FOR AGGREGATES



2 capacities 1280 or 2570 litres, with or without castors.  
In standard: automatic anti-slip fork-blocking devices, opening limiter,  
and automatically unlocks and tips on contact.

## Model CAP

Upper fork aperture 160 x 60 mm  
Spacing (F): 700 mm




## Model FAP

Upper Fork aperture 200 x 65 mm  
Spacing (F): 780 mm




**NOTE :** Please ensure the forklift mast is at a suitable height (add value K from the table to the collection skip height). Check the section and the length of the forks – minimum length 1200mm (please contact us if lower length).

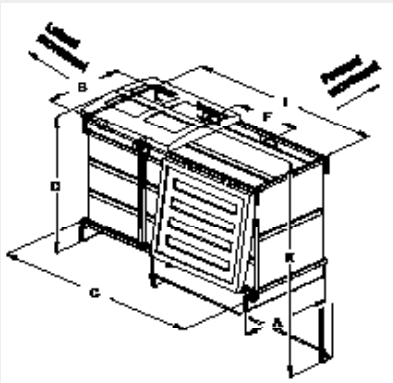

Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	K	Weight kg	FAP painted ref.	CAP painted ref.
1280	1500	-	-	1235	950	1350	1150	1450	2200	210	FAP13000	CAP13000
1280	1200	150	Frw.	1235	950	1350	1150	1550	2200	220	FAP13151	CAP13151
2570	2000	-	-	1220	950	2500	2300	1450	2200	340	FAP25000	CAP25000
2570	1800	160	Lat.	1220	950	2530	2300	1550	2200	350	FAP25161	CAP25161

Dimensions in mm for basic model (for guidance only).

Stackable.  
Load capacity = 2T.  
Perfect for delivering materials.

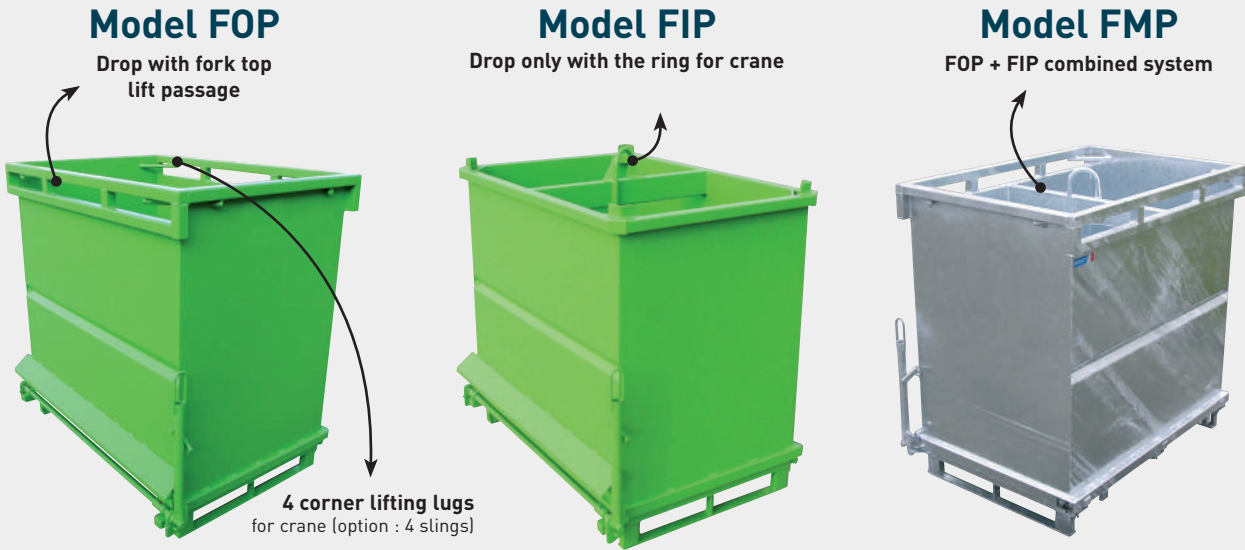

Capacity : 500 and 1000 litres for each model - On base model - Galvanized or painted version



## CHARACTERISTICS

- Heavy-duty bin : 3 mm sheet metal
- Bottom : rigid tubular chassis
- Protection sheet metal on locked system
- Lever with safety latch for manual opening
- Lower fork passage for forklift and pallet truck, on the 4 sides
- For customised or wheel-mounted version, please contact us

Capacity litres	Load kg	Lateral		Forward		Overall height	Weight kg	Painted ref.
		Overall	Interior	Overall	Interior			
500	2000	920	800	1335	1200	760	150	FOP05000
1000	2000	920	800	1335	1200	1290	205	FOP10000
500	2000	920	800	1335	1200	785	138	FIP05000
1000	2000	920	800	1335	1200	1310	190	FIP10000
500	2000	920	800	1335	1200	805	150	FMP05000
1000	2000	920	800	1335	1200	1330	210	FMP10000


Dimensions in mm for basic model (for guidance only).



# EASEL BOTTOM OPENING



For sheet metal frames, plates, glazing.  
Saves ground storage space, compact handling.

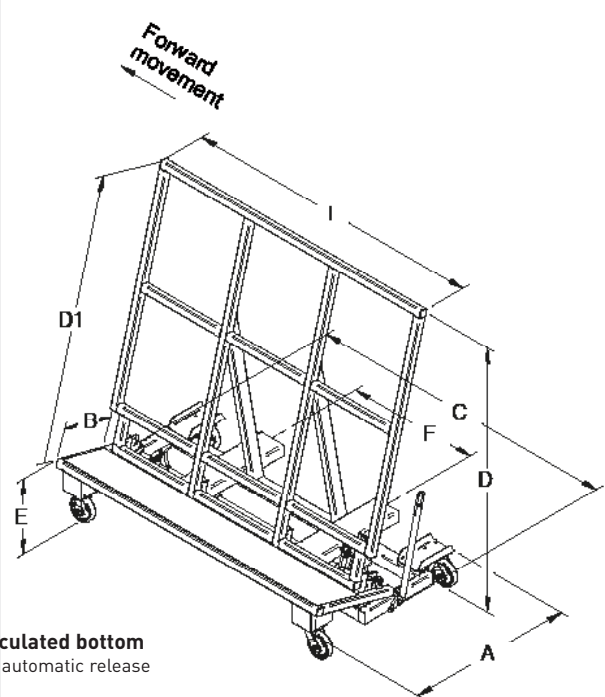

Empties by tilting the bottom

## CHARACTERISTICS

- Load capacity : 2000 kg
- Safety latch preventing unintended use during transport, remove before emptying
- Releases on contact automatically (with anti-slip mechanism) and manually using the lever
- Fork sleeves and spacing F can be modified on request
- Pedestal-mounted model can be used with pallet trucks
- Castor-mounted models have 2 fixed and 2 pivoting cast iron/polyurethane castors (Ø160) – lateral movement
- Safety chain included

Load kg	A	B	C	I	D	D1	E	F	Fork sleeves ins.	Weight kg	Painted ref.
2000	1100	354	2100	2000	1980	1740	386	880	170 x 70	225	SFP20000
2000	1100	354	2100	2000	1980	1740	386	880	170 x 70	245	SFP20162

Dimensions in mm for basic model (for guidance only).



Option poles for damming




Vertical handling

# SKIP

## FOR TELESCOPIC FORK-LIFT



- Dumping by simply tilting the forks
- Reduced height
- Automatic locking at the fork heels
- Suitable for low applications (demolition rubble, mortar, grape pomace under the press, waste under machines, etc.)

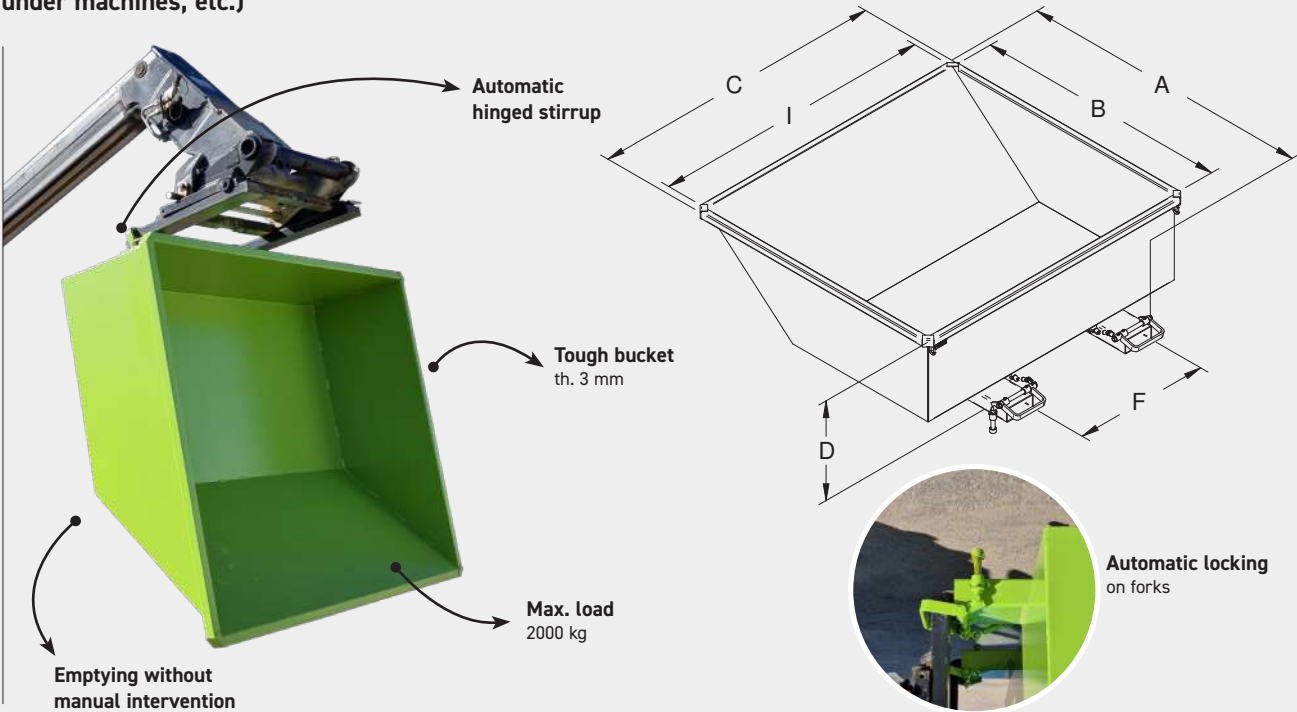

Dump position by tilting the forks



Working height 500 mm



Safe unloading

## SPECIFICATIONS

- Capacities 675 – 1000 - 1200 litres
- Folded 3mm sheet metal bucket
- Front chute for easy emptying
- Tilting by tilting the telescopic truck apron
- Automatic safety features at fork heels for ISO forks without hydraulic translator (thickness 50 mm maximum)
- No pallet truck passage
- Closed fork sleeves, truck connection and centre-distance (F) can be modified to order
- For safety reasons, it is forbidden to shake the bucket in the vertical position
- Options: Sealed body, crane hitching on 4 corner loop and galvanized version
- For made to measure – contact us

Capacity liters	Load kg	A	B	C	I	D	F	Fork sleeves inside section	Weight kg	Painted réf.
675	1500	1730	1494	1200	1120	590	800	170 x 70	145	BTP07000
1000	2000	1730	1494	1745	1660	590	800	170 x 70	175	BTP10000
1200	2000	1730	1494	2080	1995	590	800	170 x 70	193	BTP12000

Dimensions shown in mm excluding options and without engagement.



# SKIP FOR FORKLIFT WITH ROTATING HEAD



# OPTIONS AND FUNCTIONS OF USE

Complete emptying by inversion.

Low-cost.

Stackable.

CHARACTERISTICS													
Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	F	Weight kg	Painted ref.		
500	1500	-	-	890	775	1285	1200	635	740	97	BRP05000		
500	1200	125	Fr	960	775	1285	1200	710	500	110	BRP05121		
1000	1500	-	-	890	775	1285	1200	1175	740	130	BRP10000		
1000	1200	125	Fr	960	775	1285	1200	1245	500	145	BRP10121		
1250	1500	-	-	1100	975	1285	1200	1170	740	150	BRP12000		
1250	1200	125	Fr	1160	975	1285	1200	1240	500	165	BRP12121		
1500	1500	-	-	1100	975	1560	1475	1140	740	164	BRP15000		
1500	1200	125	La	1100	975	1650	1475	1210	740	178	BRP15121		
2000	1500	-	-	1100	975	1560	1475	1485	740	190	BRP20000		
2000	1200	125	La	1100	975	1650	1475	1560	740	207	BRP20121		

Dimensions in mm for basic model (for guidance only).





# HOPPERS


## HOPPERS

<b>FC/FD</b>	Helmet hopper .....	50
<b>FG</b>	Guillotine hopper .....	52
<b>FT</b>	Drop bottom hopper .....	53
<b>TB-F</b>	Hopper for big-bags on feet .....	54
<b>TB-L</b>	Filling hopper and big-bag lift .....	55
<b>TSS</b>	Tailor-made special hoppers .....	56






HELMET  
HOPPER

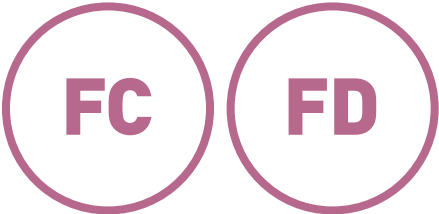

OPTIONS  
AND FUNCTIONS OF USE

Central emptying by trap with helmet.  
Suitable for all types of non-cohesive material, from powder to pebbles.  
Regulated overflow.

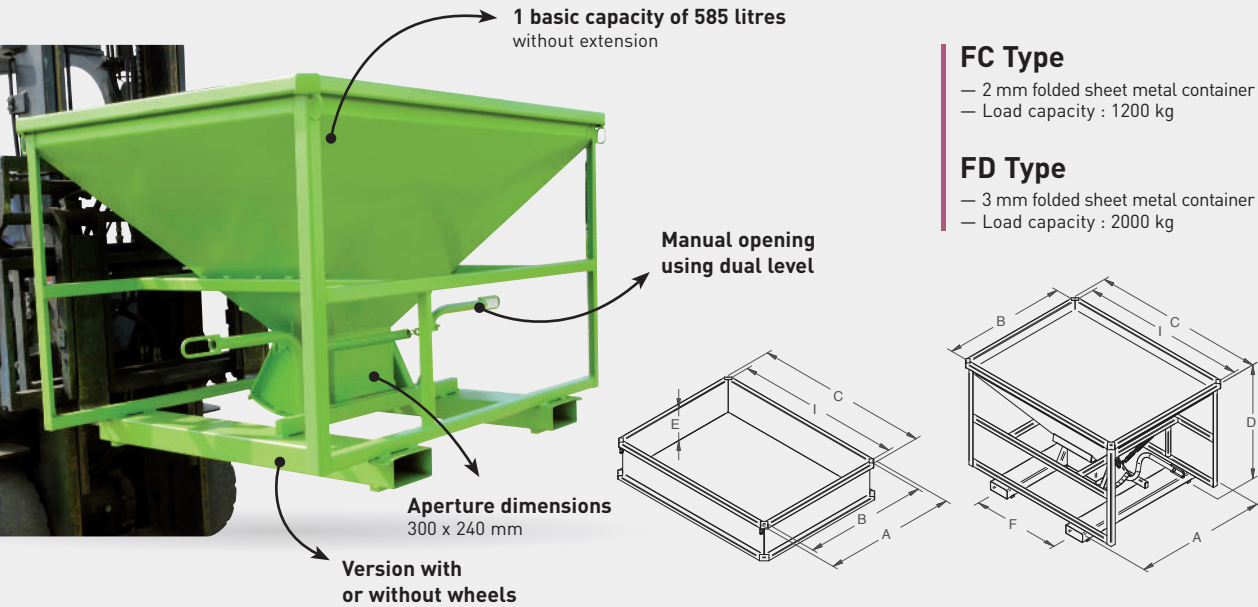

- FC Type**
- 2 mm folded sheet metal container
  - Load capacity : 1200 kg
- FD Type**
- 3 mm folded sheet metal container
  - Load capacity : 2000 kg



- CHARACTERISTICS**
- 1 basic capacity of 585 litres and 2 adaptable extension frames increasing capacity to 1085 or 1585 litres
  - Controlled emptying flow, return spring on the helmet
  - Helmet hinges mounted on bearings
  - Fork sleeves aperture : 170 x 70 mm. Spacing (F) : 850 mm-modifiable on request
  - Pedestal mounted models with pallet truck access points - Stackable
  - Castor mounted models have 2 fixed and 2 pivoting castors Ø125 alu/polyurethane on FC hopper and Ø160 cast iron/polyurethane on FD hopper with handrail, lateral motion
  - For customised production, please contact us

	Capacity litres	With	A	B	C	I	D	E	Weight kg	Painted ref.
FC Model : hopper thickness 2mm										
Hopper load 1200 kg	585	-	1200	1120	1580	1500	1050	-	150	FCP05000
	585	castors	1200	1120	1670	1500	1110	-	160	FCP05121
Extension	for 1085 L	-	1225	1120	1605	1500	-	300	40	REP20000
	for 1585 L	-	1225	1120	1605	1500	-	600	65	REP25000
FD Model : hopper thickness 3mm										
Hopper load 2000 kg	585	-	1200	1120	1580	1500	1050	-	205	FDP05000
	585	castors	1200	1120	1670	1500	1160	-	225	FDP05162
Extension	for 1085 L	-	1225	1120	1605	1500	-	300	60	REP30000
	for 1585 L	-	1225	1120	1605	1500	-	600	100	REP35000

Dimensions in mm for basic model (for guidance only).

FOR CUSTOMISED  
PRODUCTION  
See Page 56






# GUILLOTINE HOPPER



# DROP-BOTTOM HOPPER



For transport and distribution of aggregates.  
Central emptying through gate.  
Complete or partial dumping.

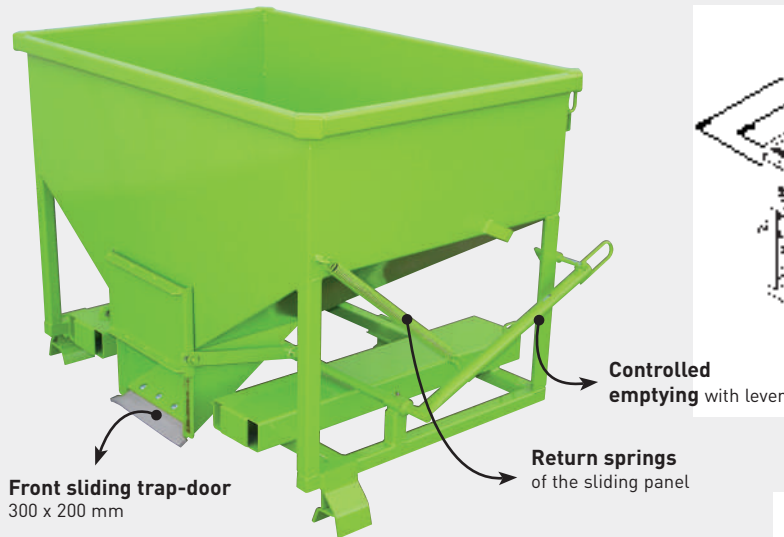

Version with or without wheels




CHARACTERISTICS	
— Capacity from 500 to 1400 litres	
— Bin : 3 mm sheet metal	
— Lever locks in position for complete emptying	
— Fixed-foot models are stackable	
— Safety chain included	
— Castor-mounted models have 2 fixed + 2 pivoting Ø125 mm alu/polyurethane castors and a handrail - forward movement	
— For customised products, please contact us	
— Available options include : gate blocking device (pre-set notches) and a waterproof guillotine	

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	F	Weight kg	Painted ref.
500	1000	-	920	800	1340	1200	970	700	160	FGP05000
500	1000	125	980	800	1340	1200	1030	700	170	FGP05121
750	1300	-	920	800	1340	1200	1230	700	185	FGP07000
750	1200	125	980	800	1340	1200	1290	700	195	FGP07121
1000	1700	-	1130	1000	1650	1500	1220	700	210	FGP10000
1000	1200	125	1180	1000	1650	1500	1280	700	220	FGP10121
1400	2200	-	1130	1000	1650	1500	1485	700	255	FGP14000
1400	1200	125	1180	1000	1650	1500	1545	700	265	FGP14121

Dimensions in mm for basic model (for guidance only).

Channeled emptying through base.  
Fork bottom lift.

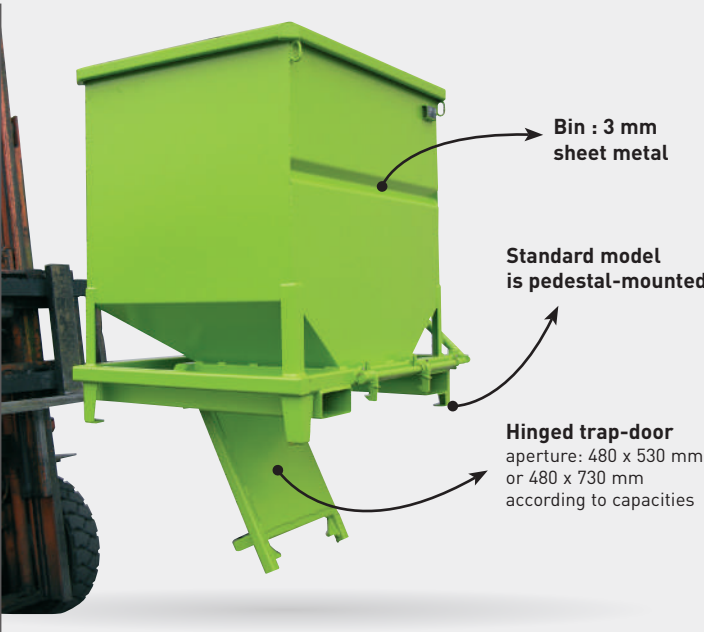

CHARACTERISTICS	
— Capacities from 750 to 1500 litres	
— Empties via lower hinged trap-door. Aperture : <ul style="list-style-type: none"><li>• 480 x 530 mm (750 and 1000 L models)</li><li>• 480 x 730 mm (1250 and 1500 L models)</li></ul>	
— Lever for manual opening, remote control possible	
— Fork sleeves aperture : 170 x 70 mm. Spacing (F) : 750 mm	
— Safety chain included	
— For customised products, please contact us	


Capacity litres	Load kg	A	B	C	I	D	F	Weight kg	Painted ref.
750	1500	950	800	1350	1200	1095	750	195	FTP07000
1000	2000	950	800	1350	1200	1355	750	220	FTP10000
1250	2250	1150	1000	1645	1500	1190	750	250	FTP12000
1500	2500	1150	1000	1645	1500	1355	750	270	FTP15000

Dimensions in mm for basic model (for guidance only).



# HOPPER

## FOR BIG-BAG ON FEET



- Use with loading bucket to fill big-bags quickly.
- Clean work space.
- 2 versions: with removable or fixed legs



- ### CHARACTERISTICS
- Tubular base reinforced with gusset plates
  - Hopper: 3 mm sheet metal with reinforcing ribs
  - Chute aperture: 500 x 500 mm
  - Clearance below hooks: 1650 mm
  - 1 model TBP05000, simplified structure with fixed legs, width 1.70m (no options possible)
  - **Tip:** place a pallet under big-bag facilitating its removal, and never have burden on hooks
  - Available options include: double flat helmet or flowregulating sliding gate, according to load and product type (contact us)
  - Other sizes available on request

Capacity litres	Forward		Lateral		D	Hook spacing	Weight kg	Painted ref.
	Interior (I)	Overall (C)	Interior (B)	Overall (A)				
490	1700	1800	1000	1100	2030	1044 x 847	162	TBP05000
830	1700	1900	1000	1200	2355	1044 x 860	221	TBP08000
830	2100	2300	1000	1200	2355	1076 x 840	243	TBP10000
1220	2500	2700	1000	1200	2600	1086 x 846	287	TBP11000
1460	3000	3200	1000	1200	2630	1149 x 845	317	TBP13000


Dimensions in mm for basic model (for guidance only).

# FILLING HOPPER

## AND BIG-BAG LIFT



- Filling and handling of the big-bag.
- 3 widths.
- Permissible load 2 tonnes.
- Approved by body of control.

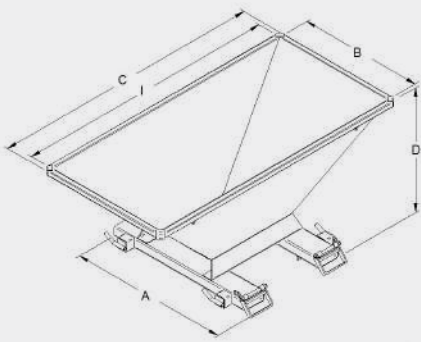

- ### CHARACTERISTICS
- 3 mm steel panel hopper with reinforcement pleats
  - 500 x 500 mm outlet channel
  - Forks gripped in 5 mm thick sleeves, 170 x 55 int. passage, 680 mm between forks
  - Distance between hooks 900 x 975 mm

**ATTENTION :** Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.



Capacity litres	A	B	C	I	D	F	Weight kg	Painted ref.
830	1280	1000	1780	1700	870	680	170	TBP28000
830	1280	1000	2180	2100	910	680	176	TBP30000
1460	1280	1000	3080	3000	1140	680	233	TBP33000

Dimensions in mm for basic model (for guidance only).



# TAILOR-MADE SPECIAL HOPPERS



# TAILOR-MADE SPECIAL HOPPERS



Tell us your technical requirements and we will build your hoppers to measure !

Opening control by manual lever or handle.  
Controlled and channeled emptying.  
Painted, galvanized or stainless steel finish.

Version on base or on wheels.  
Various chutes.



Sealed sliding hatch



Sliding hatch and special downspout



Hopper with breathing pipes



Diaphragm valve




Lever butterfly valve



Handwheel butterfly valve



Offset helmet hopper



Dual-helmet hatch



Sliding hatch on external rollers




Spherical ball valve



Articulated rotating hatch



Pinch valve

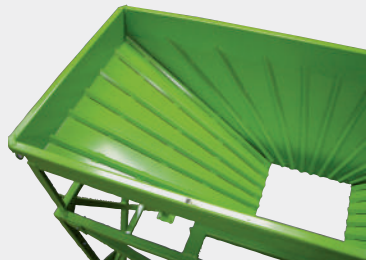


Reinforced  
by anti-punching flanges



Sealed sliding hatch



Crane grip helmet hopper



Round chute, sealed  
by eccentric lever



Basic sliding hatch  
for light products



Flow adjustment sliding hatch with  
reduction gearing and angle gearing



# SHOVELS & BUCKETS

## SHOVELS & BUCKETS

<b>GB</b>	Big-bag filler bucket with hydraulic flap - 2T load .....	64-65
<b>GVL</b>	Hydraulic bulk bucket load 1.5 to 3T .....	63
<b>GVT</b>	Hydraulic bulk bucket load 1 to 1.5T .....	62
<b>PCH</b>	Loading shovel hydraulic tilting .....	61
<b>PCM</b>	Loading shovel mechanical tilting .....	60





# LOADING SHOVEL

## MECHANICAL TILTING




# LOADING SHOVEL


## HYDRAULIC TILTING



For use with forklift.  
Manual tipping.  
For loading bulk products from ground level.

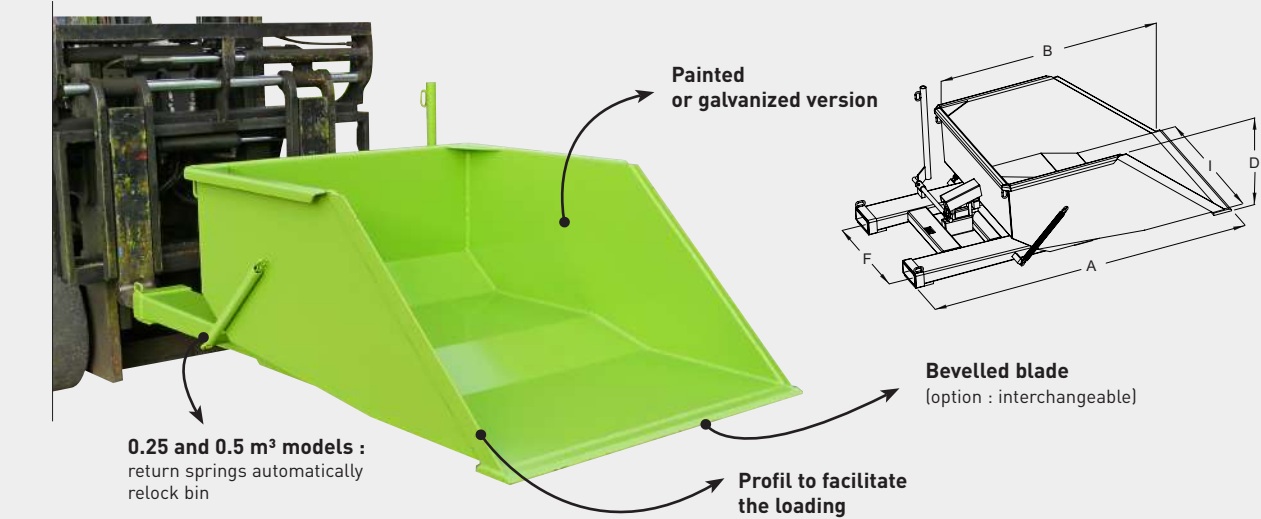

For use with forklift.  
Hydraulic tipping.  
Comfort of use.  
For loading bulk products from ground level.

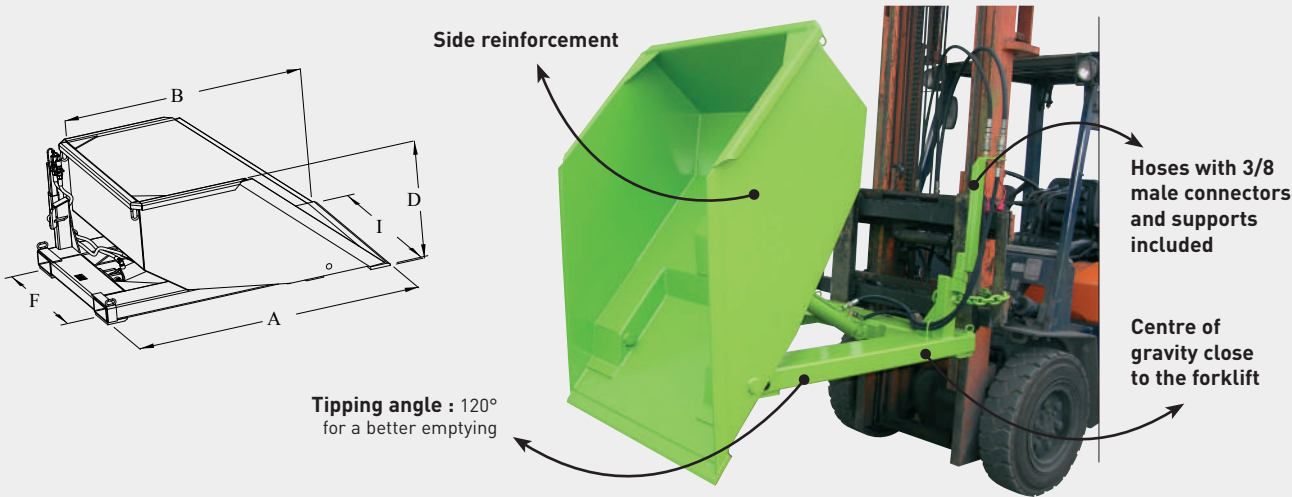

### CHARACTERISTICS

- Capacity 0.25 to 2.5 m<sup>3</sup>
- Flat bottom : 5 mm sheet metal (0.25 m<sup>3</sup> to 0.8 m<sup>3</sup> models) or 6 mm sheet metal (1.5 m<sup>3</sup> to 4 m<sup>3</sup> models)
- Beveled blade, 400 HB, 15 mm sheet metal
- Welded band reinforces fork sleeves entry points
- Tipping angle : 120°
- Metal casing protects locking spring and hook
- Safety chain included

Capacity m <sup>3</sup>	Load kg	A	B	I	D	F	Fork sleeves ins.	Fork CDG	Weight kg	Painted ref.
0.25	1000	1720	1100	750	490	470	170 x 65	1060	168	PMP07502
0.5	1500	1940	1300	1000	560	700	170 x 65	1060	220	PMP10005
0.8	2000	1950	1300	1300	760	700	170 x 65	1060	270	PMP13010
1.5	2000	1950	1500	1500	800	900	170 x 65	1110	353	PMP15015
2	2500	1855	1500	2150	800	900	170 x 70	1050	445	PMP20020
2.5	2500	1855	1500	2150	1010	900	170 x 70	1030	470	PMP20025

Dimensions in mm for basic model (for guidance only).

### CHARACTERISTICS

- Capacity : 0.25 m<sup>3</sup> to 4 m<sup>3</sup>
- Flat bottom : 5 and 6 mm following capacities
- Beveled blade, 400 HB, 15 mm sheet metal
- Hydraulic dumping : connect a double-acting cylinder to forklift (side shift carriage) 4 m<sup>3</sup> model has 2 cylinders
- Hoses with 3/8 male connectors and supports included

Capacity m <sup>3</sup>	Load kg	A	B	I	D	F	Fork sleeves ins.	Fork CDG	Weight kg	Painted ref.
0.25	1000	1590	1270	750	450	535	170 x 70	850	210	PHP07502
0.5	1500	1590	1300	1000	650	785	170 x 70	700	256	PHP10005
0.8	2000	1620	1300	1300	740	700	170 x 70	720	309	PHP13010
1.5	2000	1790	1500	1500	820	900	170 x 70	780	395	PHP15015
2	2500	1790	1500	2150	820	900	170 x 70	800	457	PHP20020
2.5	3000	1790	1500	2150	1020	900	170 x 70	780	488	PHP20025
3	3000	1880	1700	2150	1070	900	170 x 70	750	584	PHP20030
4	3500	1880	1700	2500	1220	1000	170 x 70	700	704	PHP25040

Dimensions in mm for basic model (for guidance only).



# HYDRAULIC BULK BUCKET

## LOAD 1 TO 1.5 T.

GVT

For use with forklift.  
For loading products (grain, chips, fertilisers, sand, etc.) from ground level.  
Capacity 0.25 to 1.1 m<sup>3</sup>



- CHARACTERISTICS
- Capacity 0.25 and 0.5 m<sup>3</sup>, tipping by 1 double-acting cylinder
  - Capacity from 0.8 to 1.1 m<sup>3</sup>, tipping by 2 double-acting cylinders
  - 5 mm heavy-duty scoop
  - Articulation joints have bearings and grease nipples
  - Hydraulic connection with 2 double-acting cylinders (hoses with 3/8 male connectors)
  - Safety chain included
  - Option interchangeable blade

Capacity m <sup>3</sup>	Load kg	Overall depth	Bin depth	Scoop width	Centre interior height	Center to center forks	Fork sleeves ins.	1200 fork CDG	Weight kg	Painted ref.
0.25	1000	1285	720	1130	340	700	170 x 70	1050	190	GNP02001
0.5	1000	1384	950	1240	510	700	170 x 70	1080	230	GNP05001
0.8	1500	1620	1230	1500	700	800	170 x 70	870	377	GNP08002
1	1500	1620	1230	1750	700	900	170 x 70	870	407	GNP10002
1.1	1500	1620	1230	2000	700	900	170 x 70	870	440	GNP11002


Dimensions in mm for basic model (for guidance only).

# HYDRAULIC BULK BUCKET

## LOAD 1.5 TO 3 T.

GVL

Direct lift on forks.  
Loading close to apron.  
U-shaped scoop - complete emptying.

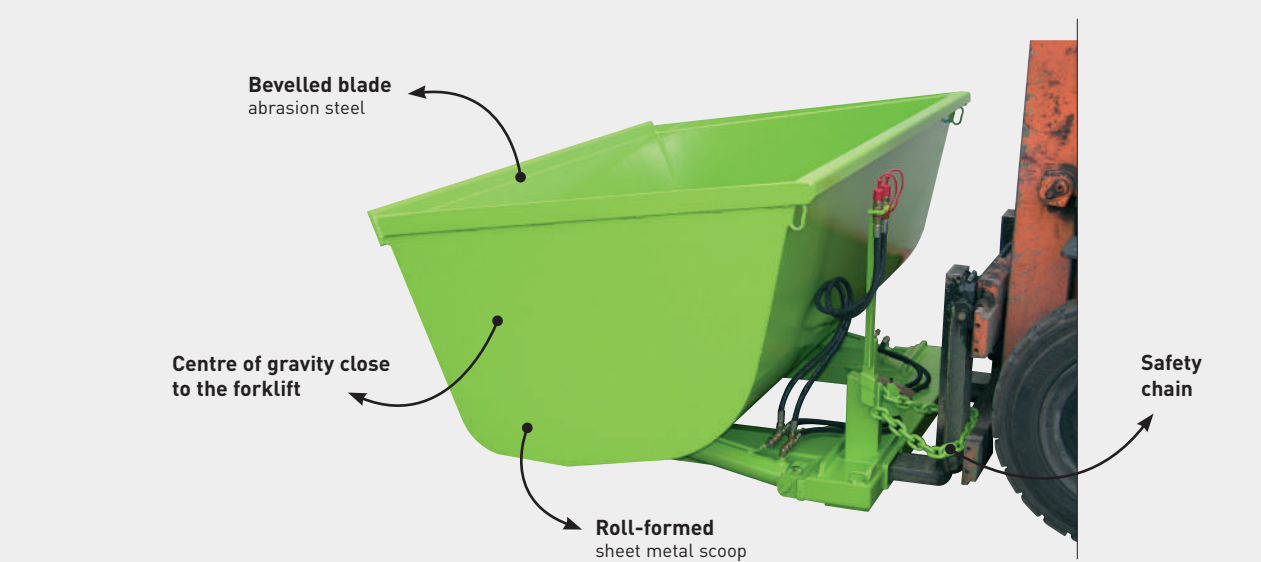

- CHARACTERISTICS
- Capacity : 0.25 to 3 m<sup>3</sup>
  - 5 mm or 6 mm heavy-duty scoop
  - Articulation joints have bearings and grease nipples
  - Hydraulic dumping : connects 2 double-acting cylinders to forklift (side shift carriage)
  - Hoses with 3/8 male connectors and supports included
  - Option interchangeable blade

Capacity m <sup>3</sup>	Load kg	Overall depth	Bin depth	Scoop width	Centre interior height	Center to center forks	Fork sleeves ins.	1200 fork CDG	Weight kg	Painted ref.
0.25	1000	1500	770	1000	425	460	170 X 70	880	260	GLP02503
0.5	1500	1520	1000	1250	500	500	170 X 70	880	385	GLP05003
1.1	2000	1450	1260	1500	730	800	170 X 70	790	437	GLP11003
1.3	2000	1450	1260	1750	730	900	170 X 70	790	464	GLP13003
1.5	2000	1450	1260	2000	730	900	170 X 70	795	492	GLP15003
2	2500	1700	1590	2000	860	900	170 X 70	810	648	GLP20004
2.4	2500	1785	1700	2000	990	900	170 X 70	810	702	GLP24004
3	3000	1785	1700	2500	990	1000	170 X 70	815	783	GLP30004

Dimensions in mm for basic model (for guidance only).





Yes, I recommend the GB bucket, it is very convenient and we save a lot of time...  
I have just filled 10 big-bags in 10 minutes!

With the GB filler bucket, loading and conditioning in big-bags has never been so easy!



1. Loading



2. Conditioning



3. Handling

# BIG-BAG FILLER BUCKET

## WITH HYDRAULIC FLAP - 2T LOAD



Direct lifting on forks.  
Simultaneous material pick-up from the ground/floor and big-bag filling.  
Certified by an approved body  
Increased productivity and safety - Accurate and fast filling




Filling productivity  
(10 big bags  
in 10 minutes)



Ideal for loading sand,  
gravel, cereals,  
aggregates, etc.

4 exterior hooks  
for big-bag 1m<sup>3</sup>



4 interior hooks  
for big-bag 0.25  
and 0.5 m<sup>3</sup>


Precise dosing using  
the flap controlled  
directly from the forklift

**REGULATORY VERIFICATION:** Before use, check the adequacy between the lifting accessory, the fork-lift/crane and the use.

**RECOMMENDED FORKLIFT:** Capacity 4.5T - with 1200 mm max fork length / only 1 auxiliary hydraulic connection is needed

### SPECIFICATIONS

- Capacity 1430 litres for loading 1m<sup>3</sup> big-bags
- Pick-up width 2080 mm
- 2 x 100x50 double-acting cylinders for the loading function
- 1 x 40x25 double-acting cylinder for the cover opening function
- Automatic system for controlling the 2 functions via a single hydraulic connection
- Caution:** The 2 functions run one after the other without any dead time.
- 3/8" push-pull connection to accessory (hose to the fork-lift not supplied)
- Cover hatch 350 x 450 mm
- Locks on forks with 8 mm diameter lifting chains
- Removable counter blade
- 4 quick-release big-bag sling points
- 250 or 500 litre big-bag filling possible with optional kit
- Bag lifting MWL 2 T



1- lower the bucket  
and fill it



2- raise the  
bucket, hook on  
the big-bag



3- operate the hatch  
to check the  
emptying



4- remove the  
big-bag and repeat  
the cycle

For loading big-bag of:			Load kg	Overall profile	Pick-up width	Overall height	Center distance	Fork sleeves inside section	Weight kg	Painted ref.
0,25 m <sup>3</sup>	0,5 m <sup>3</sup>	1 m <sup>3</sup>								
		x	2000	1800	2080	1550	900	188 x 88	780	GBP10000
x	x	x	2000	1800	2080	1550	900	188 x 88	800	GBP10001

Dimensions shown in mm excluding options and without engagement.



# ACCESSORIES

## ACCESSORIES

<b>AM</b>	Muti-function hitching .....	69
<b>AT</b>	Trailer for forklift trucks .....	68
<b>BP</b>	Pallet tipper .....	70
<b>CC</b>	Adjustable rack-system hoist arm .....	72
<b>CH</b>	Frame .....	74
<b>CHS</b>	Special custom easels .....	75
<b>CN</b>	Snow-plow blade .....	71
<b>CR-B</b>	Jib for Big-Bag .....	76
<b>CR-C</b>	Lifting jib 1 hook .....	77
<b>CR-F</b>	Lifting jib .....	80
<b>CR-H</b>	Hydraulic spreader for welded wire mesh .....	82
<b>CR-T</b>	Jib for welded wire mesh .....	81
<b>CRS</b>	Customised lifting accessories .....	85
<b>CS-A CS-F</b>	Big-Bag loader .....	78
<b>CS-O</b>	Big-Bag loader upper grip .....	79
<b>EP</b>	Spur .....	84
<b>FQ</b>	Customised forks widener .....	73
<b>FR</b>	Fork extension sleeves .....	86
<b>MP</b>	Plasterboard handler .....	92
<b>PC</b>	End-of-forks protection .....	87
<b>QL</b>	Mobile delivery ramp .....	88
<b>RB</b>	Barrel inverter fitted to forklift truck forks .....	89
<b>RC</b>	Bin turner bottom grip .....	90
<b>RP</b>	Bin turner upper grip .....	91





# TRAILER FOR FORKLIFT TRUCKS

AT

- Safe moving and easily leveling trailer, mobile home, caravan...
- Traffic on private roads.
- Forklift fork grip 1200 length max. in sleeves section int.170x70 – Fork spacing (middle):800mm.
- Compatible with front and telescopic forklift.


Ref. ATP10000



Ref. ATP12000



Ref. ATP15000

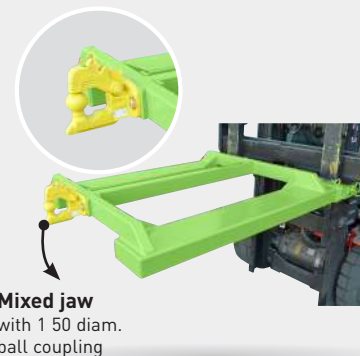

## CARACTÉRISTIQUES

### Ref. ATP10000


- Model equipped with a right-angled ball coupling
- Enables a wide range of movement
- Vertical static load on the ball : Max. 120 kg
- Towable weight : Max 2T
- Weight 79 kg

### Ref. ATP12000

- Model equipped with a combination jaw pin with one ball coupling
- Can be handled via a coupling ball or ring
- Max. Static vertical load :
  - On the ball coupling : 120 kg
  - On the jaw : 120 kg
- Max. towing weight :
  - On the ball coupling : 1.5T
  - On the jaw : 3.5T
- Weight 80 kg

### Ref. ATP15000

- Model equipped with a reinforced mixed hook
- Prized by professionals for its safety and robustness
- Usable for trailers with ring and with coupling head
- The mixed hook with its nippers and coupling allows 2 uses
- Reinforced attachment to the heels of the forks
- Static vertical load on the ball hook: 375 kg
- Maximum towable load on the ball hook: 3T5
- Weight 83 kg

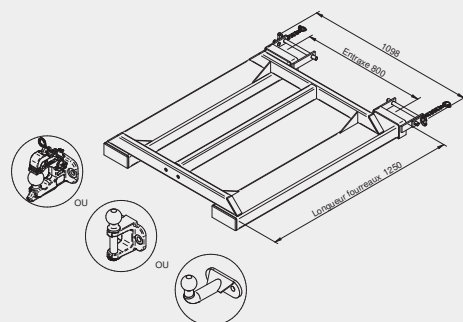

# MULTI-FUNCTION HITCHING


AM



- All-in-one tool – inspection body approved
- For fitting on forklift forks.
- 2 models


## AMP30000 Model

FOR CLASS III and II

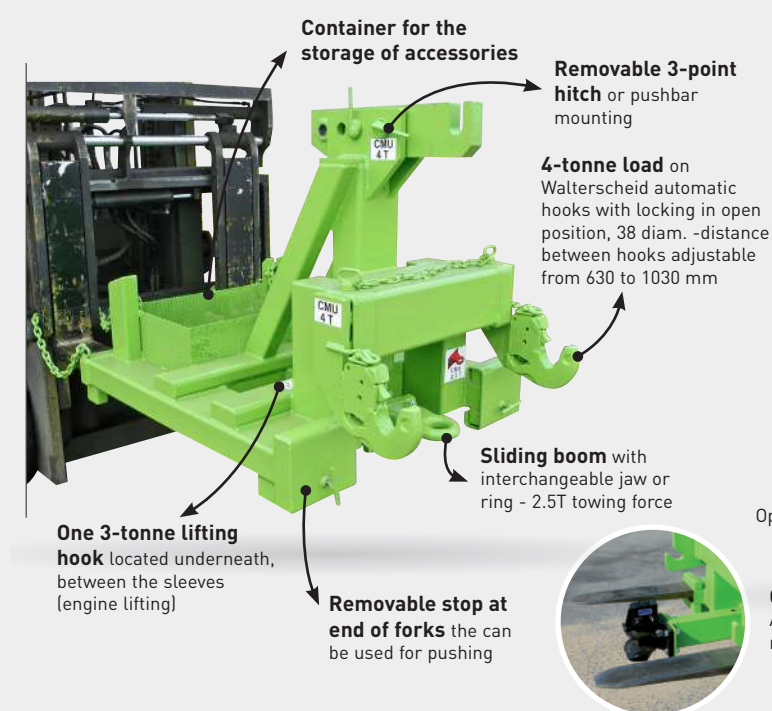

## Réf. AMP05000

For towing and lifting

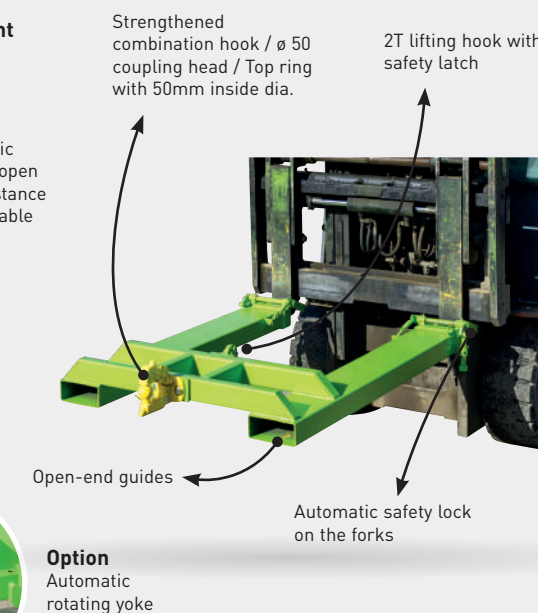

⚠ **ATTENTION** : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

## CHARACTERISTICS

### AMP30000

- Handling of agricultural machines
- Made-to-measure according to the application from the basic version, AMP30000.
- Forklift truck fork grip
- Three-point towing with hooks and adjustable push bar boom
- Telescopic boom with hook for towing trailer, spreader, etc...
- Type-approved by a regulatory control body
- Options: hydraulic fork grip and removable boom arm



## CHARACTERISTICS

### AMP05000

- Fork pick-up in guides with an inside section of 170x70 – centre distance 800mm
- Static vertical load on the combination hook: 375kg
- Maximum towable load on the ball hitch: 3T5
- 2T load on the inner lifting hook
- Fork guides, length 1250mm
- Weight 80kg



# PALLET TIPPER




# SNOW-PLOW BLADE



Effortless pallet unloading.  
For use with forklift.  
Pallet securely held.




Metal or rubber blade interchangeable.  
Easy to use with forklift.  
Quick and efficient snow clearance.

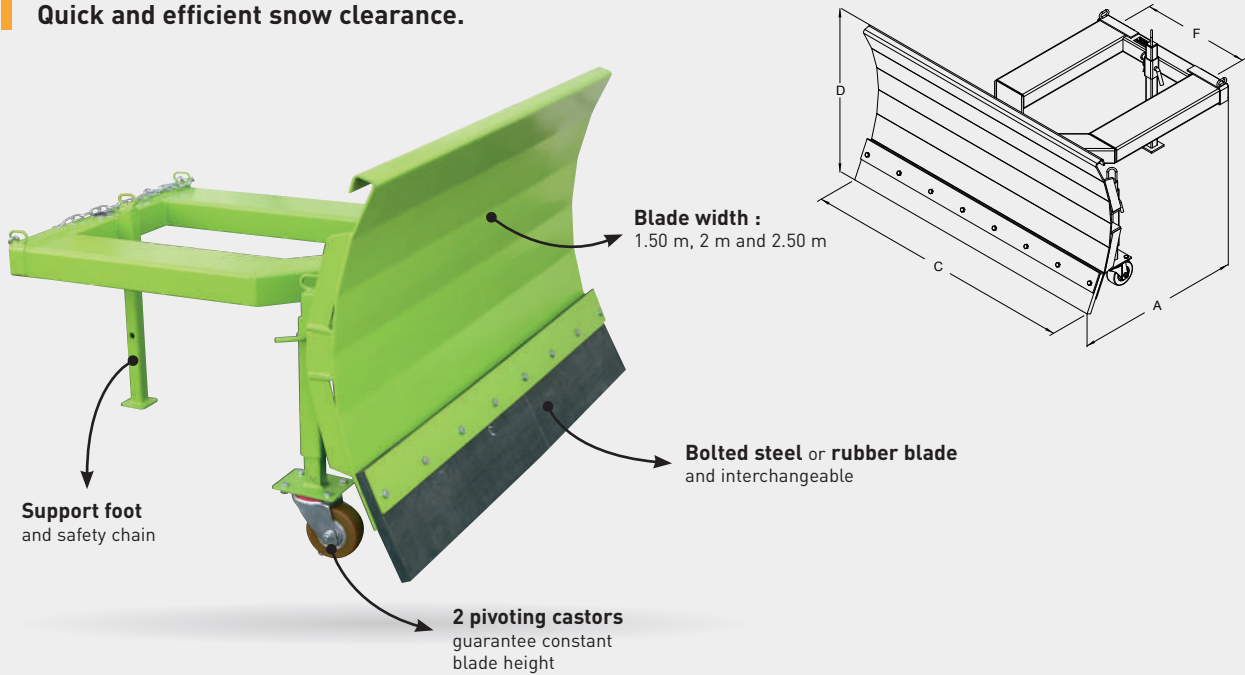

## CHARACTERISTICS

### Patented model - Ref. BPP05000

- Overall dimensions : 580 x 1745 x 465 mm
- Weight 125 kg
- Maximum length of the charge on the pallet : 1100 mm (clearance for the claws)
- Lever for manual tipping
- Fork sleeves aperture : 145 x 55 mm. Spacing : 388 mm
- 2 end-stop limit cables

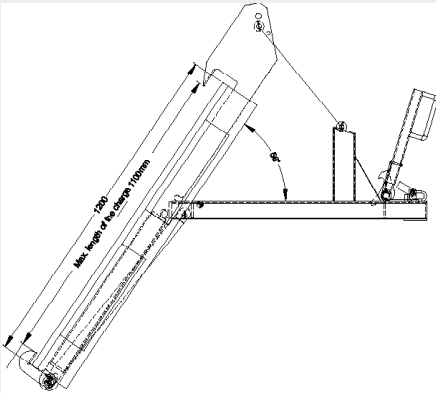

## UNLOAD PALLET CONTENTS EFFORTLESSLY (BUNDLED BOXES, PLASTICS, BAGS, ETC.).



## CHARACTERISTICS

### 2 MODELS :

- With highly-resistant rubber scrapper (65 shores), 2 pivoting castors guarantee constant blade height. Prevents ground damage when clearing snow. Blade height (D) 825 mm
- With bolted steel blade (400 HB), can be used throughout the year for leveling, clearing or cleaning surfaces
- Blade height (D) 800 mm

Length blade mm (C)	Castors Ø	A	F	Fork sleeves ins.	Weight kg	Steel blade ref.	Rubber blade ref.
1500	-	1270	600	170 x 70	180	CNP15000	-
1500	125	1270	600	170 x 70	190	CNP15121	CNP16121
2000	-	1270	600	170 x 70	215	CNP20000	-
2000	125	1270	600	170 x 70	225	CNP20121	CNP21121
2500	-	1270	600	170 x 70	250	CNP25000	-
2500	125	1270	600	170 x 70	260	CNP25121	CNP26121

Dimensions in mm for basic model (for guidance only).




ADJUSTABLE RACK-SYSTEM  
HOIST ARM

CC

Secure handling of long loads :  
piles, metal sheets, timber, bundles, etc.  
Type-approved by regulatory body.

Manufactured to request.  
Tailor-made to your requirements !

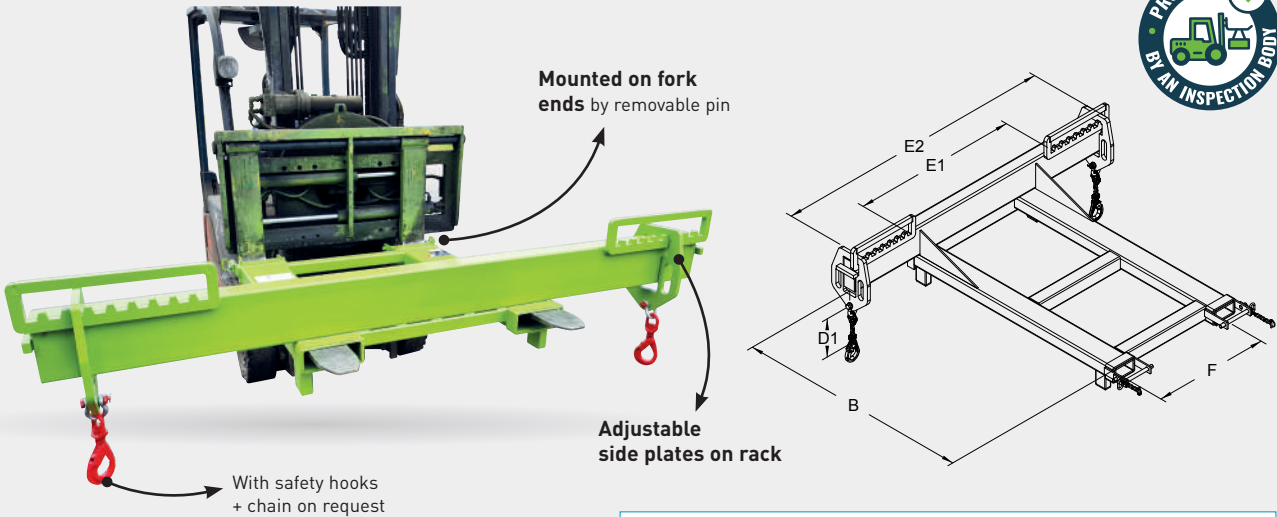

**! ATTENTION :** Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.



TABLE TO BE COMPLETED AND SENT TO US FOR A FREE QUOTATION

Distance from the bulkhead to the hooks (mm)	Min. separation between hooks (mm)	Max. separation between hooks (mm)	Chain length required (mm)	Distance between sleeves (mm)	Forklift capacity (tonne)	Cross-section and length of forklift forks (mm)	Type of load	Dimensions (mm) L x W	Weight of the load (kg)
B	E1	E2	D1	F					

This table can be downloaded from the CC page of the website.


CUSTOMISED  
FORKS WIDENER

FQ

Secure handling of long loads: packets sheets, wood etc...  
Economical purchase compared to a hydraulic system.  
Locking system on the heels of the forks.



Made to measure.  
Send us your technical requirements. Customised to suit your needs.

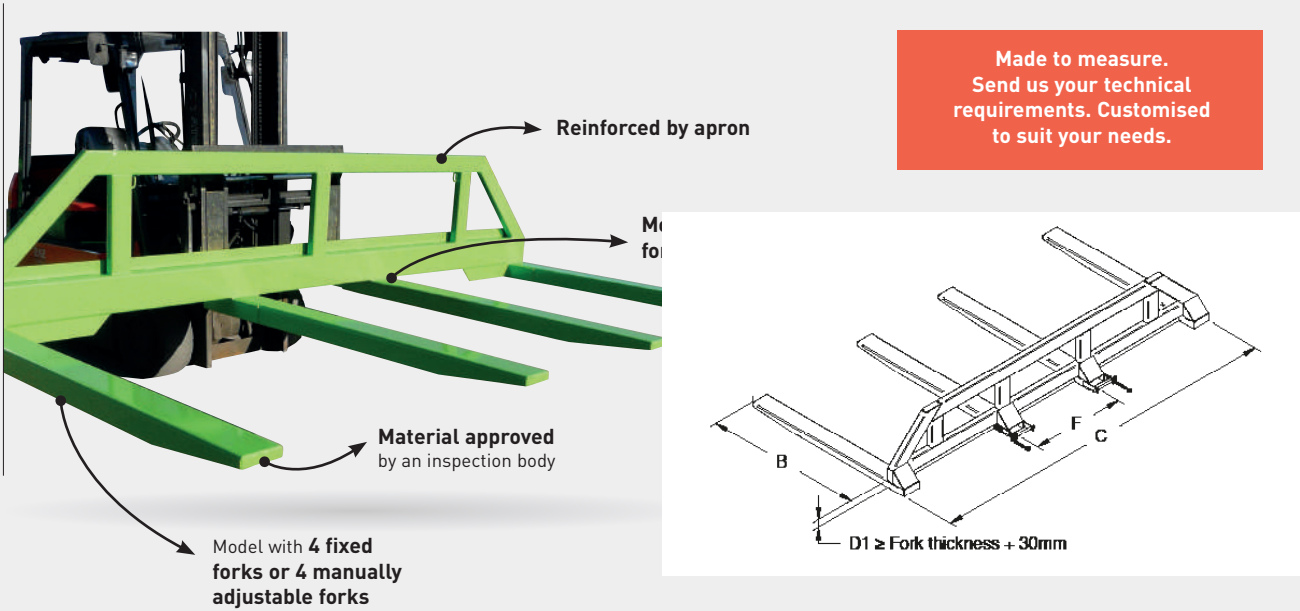

**! ATTENTION :** Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.



TABLE TO COMPLETE AND RETURN TO US FOR A FREE QUOTATION

Effective length (mm)	Effective Height under pallet (mm)	Overall width (mm)	Max spacing of carriage (mm)	Truck capacity (tonne)	Forks section and length (mm)	Type of load	Dimensions (mm) L x W	Weight Load (kg)
B	D1	C	F					

Table to download from our website (see FQ page).



For safely handling and transporting joinery, plates, etc.  
3 models.

Ref. CHP15000  
Maximum load 3000 kg



Ref. CHP25000  
Maximum load 1500 kg



Ref. CHP08000  
Maximum load 800 kg



CHARACTERISTICS

Ref. CHP15000

- Easel with inclined supports
- Support side rails and cross-members covered with interchangeable rubber section
- Special manufacturing on request

Ref. CHP25000

- Easel with inclined supports
- Forklift uses lower loops with 200 x 80 mm apert. and spacing (F) can be changed on request
- 2 vertical side ramps for fitting slings

Ref. CHP08000

- Forklift uses lower loops with 200 x 80 mm apert. and spacing (F) can be changed on request
- Cross-members covered with interchangeable rubber section
- 4 side loops for slings

Handling truck

- Reinforced frame on 4 wheels (2 fixed + 2 pivoting with brake Ø 160 alu/polyurethane or 200 iron/polyurethane for CHP16202) to move the loaded frame easily
- Handling truck Ref. CHP18161 for CHP08000
- Handling truck Ref. CHP16161 for CHP25000
- Handling truck Ref. CHP16202 for CHP15000

Load kg	A	B	C	I	D	D1	F	Fork sleeves ins.	Weight kg	Painted ref.
800	1200	560	2330	2210	2400	2100	800	200 x 80	175	CHP08000
1500	1700	600	2120	2000	2430	2130	800	200 x 80	215	CHP25000
3000	1700	580	2120	2000	2430	2130	800	170 x 70	305	CHP15000

Dimensions in mm for basic model (for guidance only).

Send us your technical requirements and we will make the easel to fit !

Security, comfort, efficiency.  
Easel with forks grip or crane grip.  
Loading and transport in security.

Storage facility.  
Easy handling for wood frame panels,  
woodworking, metal, glass...





# LIFTING CROSS FOR BIG-BAG



Secure handling.  
Approved by a control organization.  
2 models.

**ATTENTION :** Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.




## CROSS LIFTING BY CRANE



Cleats restraint straps (height 100 mm)

Maximum load : 1700 kg

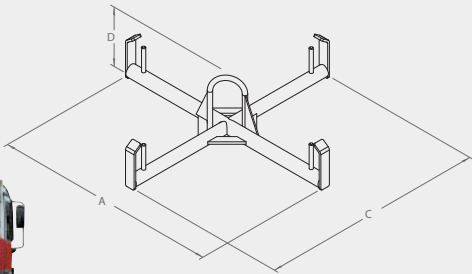

### CHARACTERISTICS

#### Ref. CRP40000

- For loading and unloading bigbag with crane truck or handling hoist
- Manufacturing in round tube Ø 45 mm
- For custom designed products, contact us

Load kg	A	C	D	Weight kg	Painted ref.
1700	915	915	230	18	CRP40000


Dimensions in mm for basic model (for guidance only).

## LIFTING FORKS GRIP



Ref. CRP50000  
4 hooks with safety latch

Ref. CRP51000  
4 hooks with quick release

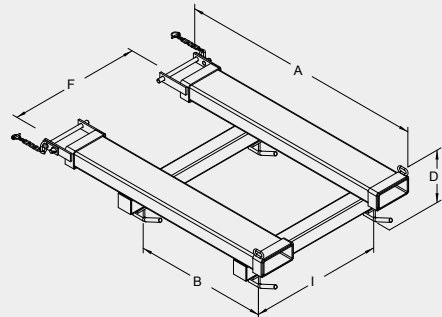

Maximum load : 2000 kg

### CHARACTERISTICS


#### REF. CRP50000 & CRP51000

- Direct mounting on forks with fork heel locking device
- Fork sleeves 170 x 70 mm and fork spacing (F) can be modified on request

Load kg	A	B	C	I	D	F	Weight kg	Painted ref.
2000	1300	700	1000	700	250	700	80	CRP50000
2000	1300	700	1000	700	280	700	80	CRP51000

Dimensions in mm for basic model (for guidance only).

# LIFTING JIB 1 HOOK




Quickly transforms your forklift into a lifting device.  
Quick mounting on forks.  
Approved by an inspection body.  
2 models.

**ATTENTION :** Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.




## Ref. CRP20000 Maximum load 3000 kg

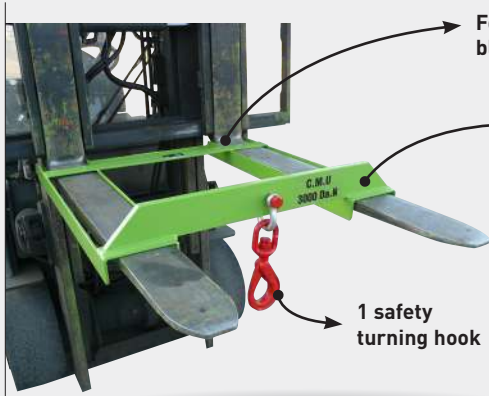


Fork heel blocking device

Set the jib on the forks vertically

1 safety turning hook

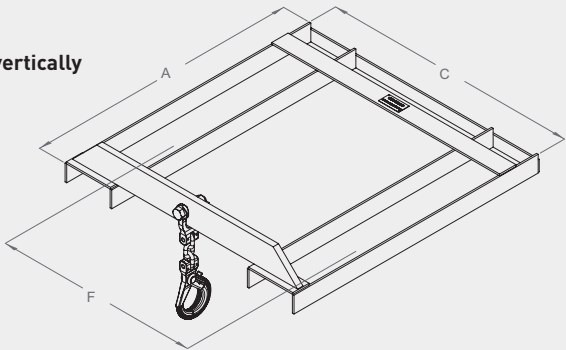


## Ref. CRP25000 Maximum load 5000 kg

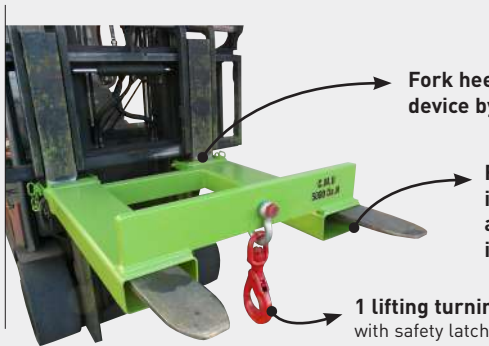

Fork heel blocking device by axis

Forks inserted into fork sleeves aperture th. 4 mm ins. 190 x 90 mm

1 lifting turning hook with safety latch

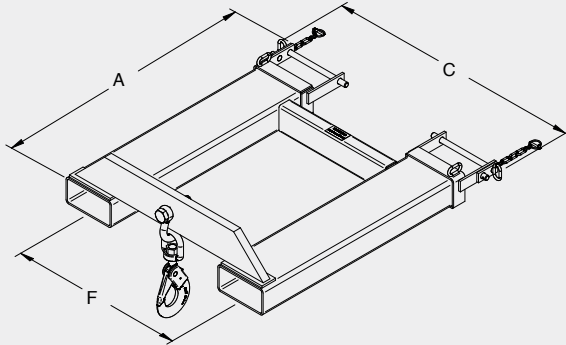

Load kg	A	C	F	Fork sleeves ins.	Weight kg	Painted ref.
3000	915	845	670	160 x 60	30	CRP20000
5000	1045	985	670	190 x 90	75	CRP25000

Dimensions in mm for basic model (for guidance only).



BIG-BAG LOADER

CS-A CS-F




For transporting Big-Bags.  
Direct mounting on forks of forklift truck.  
Approved by an inspection body.

⚠ **ATTENTION** : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

MODEL CS-A

With or without hooks versions


Bar ext. Ø : 118 mm  
Effective length : 1.70 m

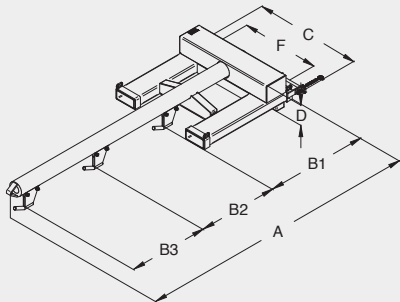

MODEL CS-F

Forward loading  
2 hooks

Load 2 x 1T



CHARACTERISTICS

- Maximum load 2000 kg
- 1 Fork heel blocking device
- Fork sleeves aperture and spacing (F) can be modified on request
- For customised products, please contact us

Model CS-A

Nber hooks	Load kg	A	B1	B2	B3	C	D	F	Fork sleeves ins.	Weight kg	Painted ref.
0	2000	2520	Bar without hooks			950	235	700	170 x 70	227	CSP20000
2	2 x 1000	2520	955	1050	-	950	290	700	170 x 70	230	CSP22000
3	3 x 660	2520	780	700	700	950	290	700	170 x 70	235	CSP23000

Dimensions in mm for basic model (for guidance only).

Model CS-F

Load kg	A	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
2 x 1000	1370	800	250	380	170 x 70	77	CSP52000

Dimensions in mm for basic model (for guidance only).


BIG-BAG LOADER  
UPPER GRIP




Safe handling of Big-Bags.  
Direct mounting on forks.  
2 models with 1 or 2 hooks.  
Approved by an inspection body.

⚠ **ATTENTION** : Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

Ref. CSP31000  
Load 1T on 1 hook



Ref. CSP32000  
Load 2T on 2 hooks

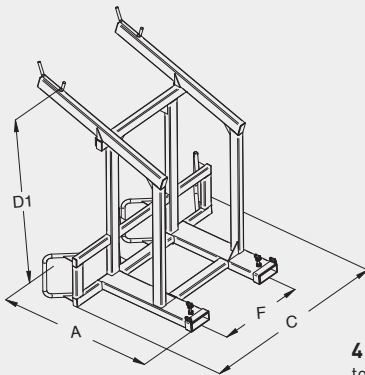

Load kg	A	C	D1	1200 fork CG	Fork sleeves ins.	F	Weight kg	Painted ref.
1T	1310	890	1570	605	165 x 55	700	102	CSP31000
2 x 1T	1310	1580	1570	626	165 x 55	700	137	CSP32000

Fork sleeves aperture and spacing (F) can be modified on request - Dimensions in mm for basic model (for guidance only).



# LIFTING JIB

CR-F




Quick mounting on forklifts.  
Approved by an inspection body.  
2 models.

**ATTENTION :** Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.

## LIFTING JIB

Automatic fork heel grip system (for forks th. max. 50 mm)

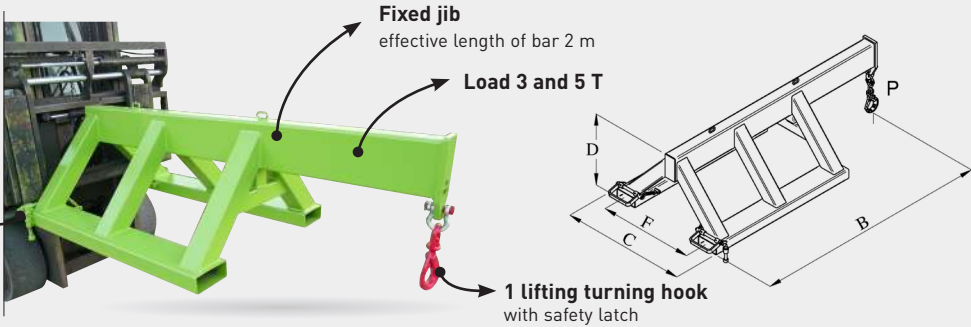

### CHARACTERISTICS


Ref. CRP31300 – 3T  
Ref. CRP31500 – 5T  
— Raised beam to save lifting height

Load kg	B	C	D	F	Fork sleeves ins.	Weight kg	Painted ref.
3000	2000	1060	615	800	192 x 112	160	CRP31300
5000	2000	1080	615	800	192 x 112	181	CRP31500

Dimensions in mm for basic model (for guidance only).

## ADJUSTABLE LIFTING JIB

Automatic fork heel grip system (for forks th. max. 50 mm)

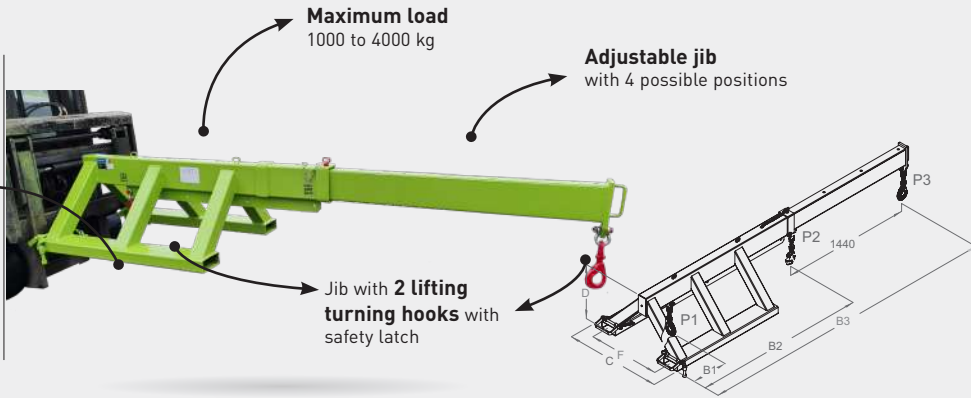


### CHARACTERISTICS

Ref. CRP30000  
— Adjustable jib : 1960 to 3400 mm  
— Maximum load : 1000 to 4000 kg (see table for details)  
— Check forklift capacity and suitability before use

B1	B2	B3	C	D	F
395	1960	3400	1060	635	800
Fork sleeves ins.		Weight kg	Painted ref.		
170 x 70		216	CRP30000		

Dimensions in mm for basic model (for guidance only).

Useful max. load: CRP30000

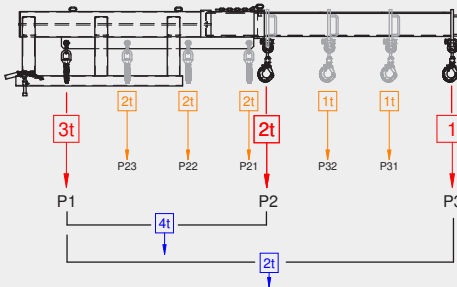


# JIB FOR WELDED WIRE MESH

CR-T



Safe and user-friendly handling of welded wire mesh.  
Approved by an inspection body.

Video

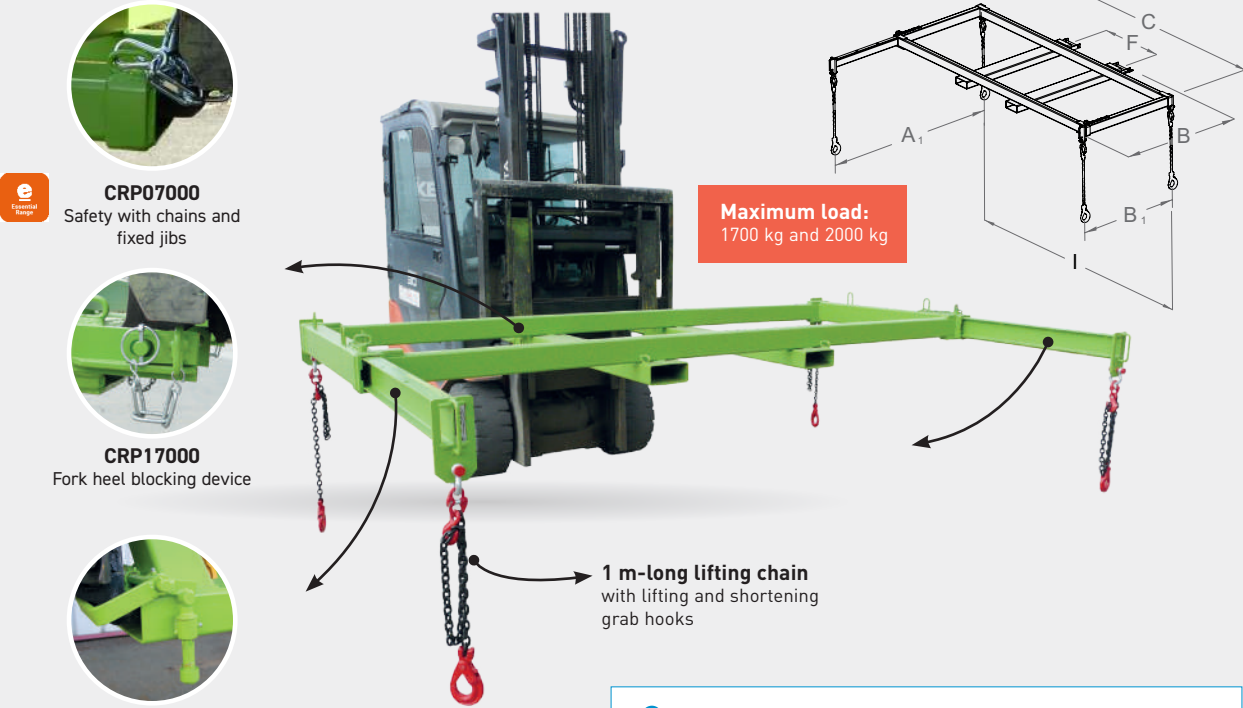

**ATTENTION:** Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.



### CHARACTERISTICS

- Maximum load: 1700 kg and 2000 kg
- Jib width: 3000 mm
- On CRP17000 and CRP27000: 2 adjustable cross-bars: 1200 to 2000 mm with latch (4 fixed positions)
- Fork sleeves aperture: 170 x 70 mm in 5 mm sheet metal. Spacing: see F in table. Can be modified on request
- With a safety device on the fork heels
- Detachable and interchangeable booms
- On CRP07000 Fixed nondetachable booms

Load kg	B1	B	A1	C	I	F	Fork sleeves ins.	Weight kg	Painted ref.
1700	-	2200	2000	3100	3000	800	170 x 70	209	CRP07000
1700	1170	1500	2000	3100	3000	800	170 x 70	208	CRP17000
2000	1170	1500	2000	3100	3000	800	170 x 70	226	CRP27000

Dimensions in mm for basic model (for guidance only).




# HYDRAULIC SPREADER FOR WELDED WIRE MESH

CR-H

OPTIONS  
AND FUNCTIONS OF USE

Quick and secure unloading of trucks.  
Can handle piles.  
Type-approved by regulatory body.

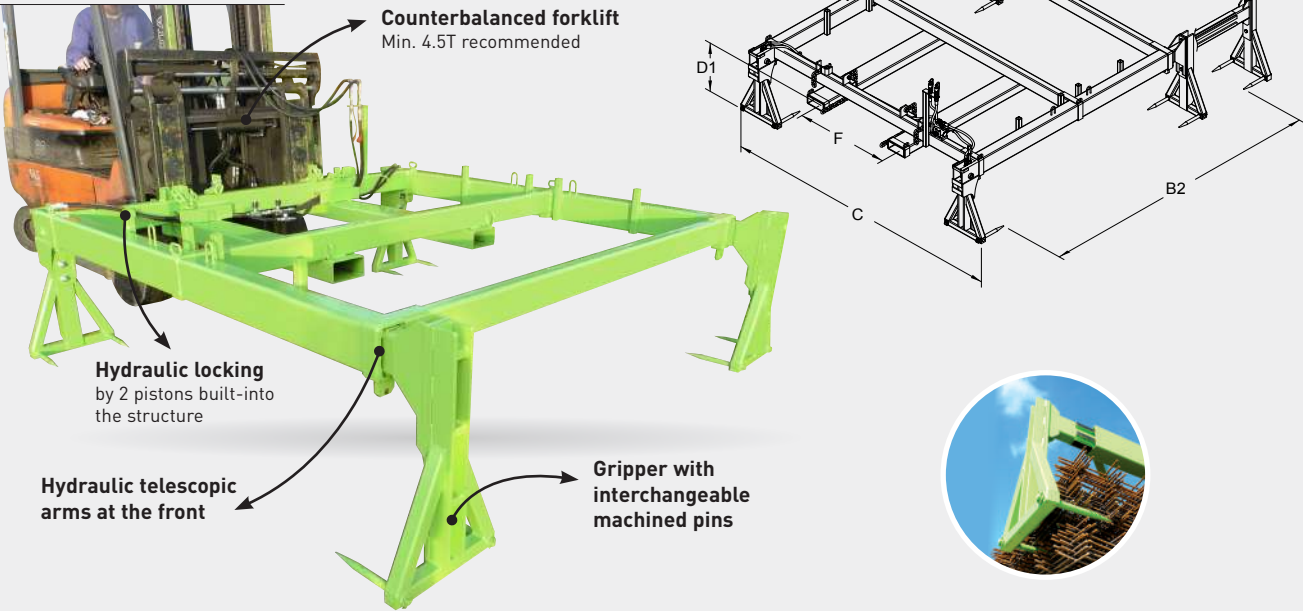

**! ATTENTION :**  
Prior to use, accessory + forklift  
acceptance procedures must be  
carried out by your authorised  
inspection body.

**! The most popular model !**  
The CRP57000 can move all types of  
stacks, but for loads longer than 4.80 m,  
careful of bending when stacking !

**! Versatile model !**  
The CRP79000 new model with its  
stands 3 pins accepts multiple formats  
from 3 to 6 m in length.

CHARACTERISTICS

- Permissible weight 2000 kg
- Can be fitted to counterbalanced or telescopic forklift truck forks
- Enables 2.40 m wide piles to be handled (for special 2 m width select the RGP option) and 3 to 6 m long piles, depending on the references
- Supplied with hoses fitted with 3/8 male couplings mounted fitted on support on left
- Remains securely fitted to the forklift truck by 12 mm diam. chains
- Delivered disassembled with 4 claws to bolt

Recommended wire meshing (width 2.40 m)	B2	C	D1	F	Fork sleeves ins.	Weight kg	Painted ref.
Length from 3 to 4.80 m	2670	2695	460	900	170 x 70	490	CRP57000
Length from 3.60 to 6 m	2670	3895	430	900	170 x 70	670	CRP78000
Length from 3 to 6 m	2670	3895	430	900	170 x 70	675	CRP79000
Length from 4.80 to 6 m	2670	3895	430	900	170 x 70	590	CRP77000


Dimensions stated in mm, excluding options, and not contractually binding.



CRP78000 and CRP79000 models equipped with stands with 3 pins  
for picking up parcels 3.60 to 6 m long or 3 to 6 m long x 2.40 m wide



Hydraulic assembly  
with adjustment for telescopic arm

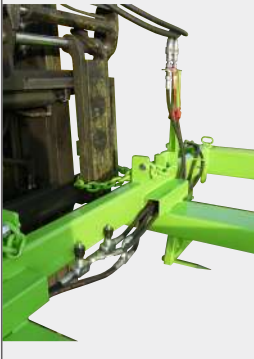


OPTIONS

- **FWP** : Quick and secure unloading  
of Adaptation for 4-forks truck
- **ELP** : 4 1m-lifting chains with  
safety and grab hooks (for retail  
outlet mesh, manual use as CR-T)
- **RGP** : Set of 4 extendable claws for  
special size 2m wire mesh, can be  
fitted on CRP57000 and CRP67000

ELP Option  
4-chain lifting kit



RGP Option Gripper reduction kit  
(fixed by pins)

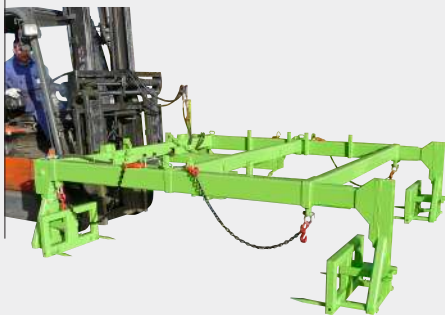


Quick and secure unloading of lorries





For transporting carpet rolls, fabric, paper, etc.  
Easy to use with forklift.  
2 models.

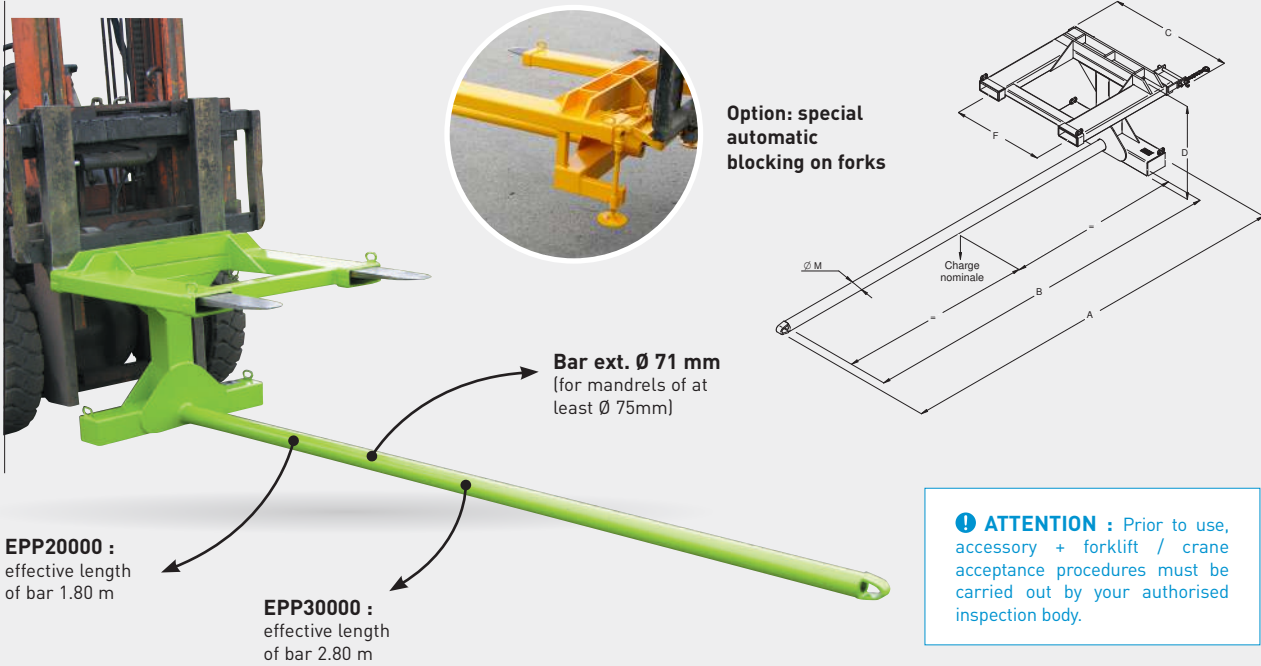

**! ATTENTION :** Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.

CHARACTERISTICS

- Safety by 1 fork heel blocking device
- Fork sleeves aperture and spacing (F) can be modified on request
- For customised products, please contact us
- Approved by an inspection body

Load kg	A	C	D	F	Fork sleeves ins.	Weight kg	Painted ref.
600	2200	930	715	700	155 x 55	137	EPP20000
400	3200	930	715	700	155 x 55	160	EPP30000

Dimensions in mm for basic model (for guidance only).

TABLE TO BE COMPLETED AND SENT TO US FOR A FREE QUOTATION

Effective length required (mm) (mini 3/4 Lg load) B	Length of the load (mm)	Outer diameter of the load (mm)	Inside diameter of the load (mm) M	Type of load	Weight Load (kg)	Spacing of carriage (mm) F	Forks section and length (mm)	Truck capacity (tonne)

This table can be downloaded from the EP page of the website.

Send us your technical requirements and we will make the lifting accessory to fit !

Approved by inspection authority.  
Safely handles all loads (bigbag, rollers, coils, nozzles, panels, parts, sheeting, netting, etc.).  
Easily mounted on forks.  
With safety locking mechanism on fork heel.



**! ATTENTION :** Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.






# FORK EXTENSION SLEEVES

FR

Quick and secure fit.  
Reinforced fork sleeves in th. 5 mm.  
Length according to the ISO 13284 standard.

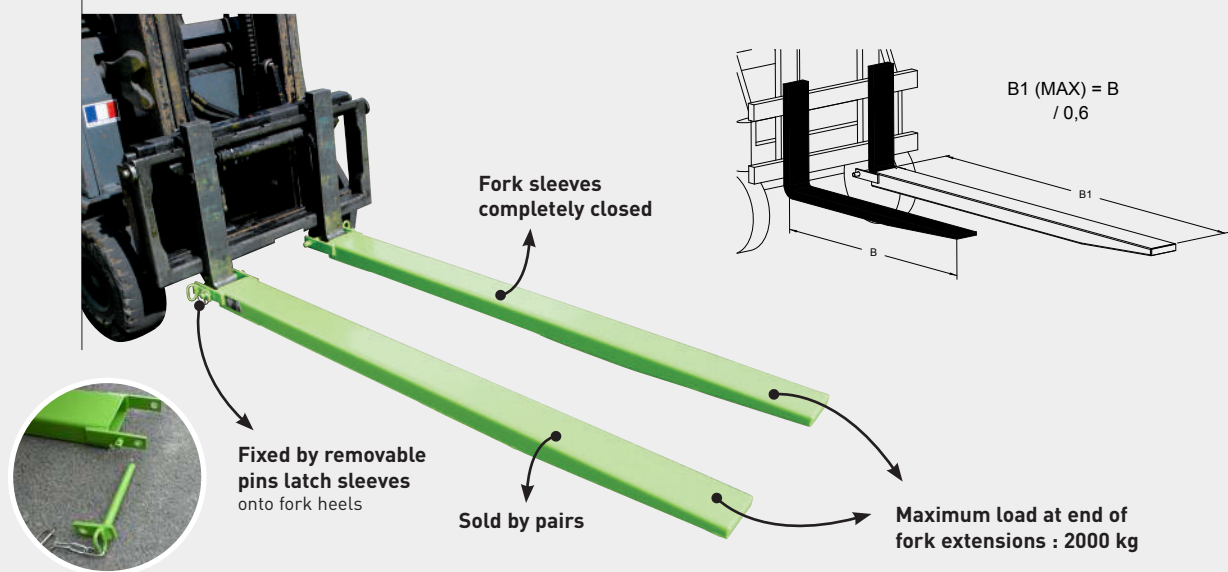

## CHARACTERISTICS

- Select model based on fork dimensions (W x H x L)
- According to the ISO 13284 Standard length extensions must conform to the following formula : Maximum length of extension (B1) = Length of the original truck forks (B) / 0.6
- For customised fork sleeves with other dimensions, please contact us


Max. fork dimensions	Extension sleeve aperture FR	Length (mm) B1	Weight kg	Painted ref. (pair)
40 x 80	50 x 100	1500	38	FRP10015
45 x 100	55 X 120	1700	49	FRP12017
	55 X 120	2000	58	FRP12020
45 x 125	60 x 145	1700	57	FRP14517
	60 x 145	2000	67	FRP14520
50 x 150	65 x 170	2000	77	FRP17020

Dimensions in mm for basic model (for guidance only).

# END-OF-FORKS PROTECTION

PC

Forks protected during movements of forklift trucks when unladen, on traffic lanes.  
Safety guaranteed.

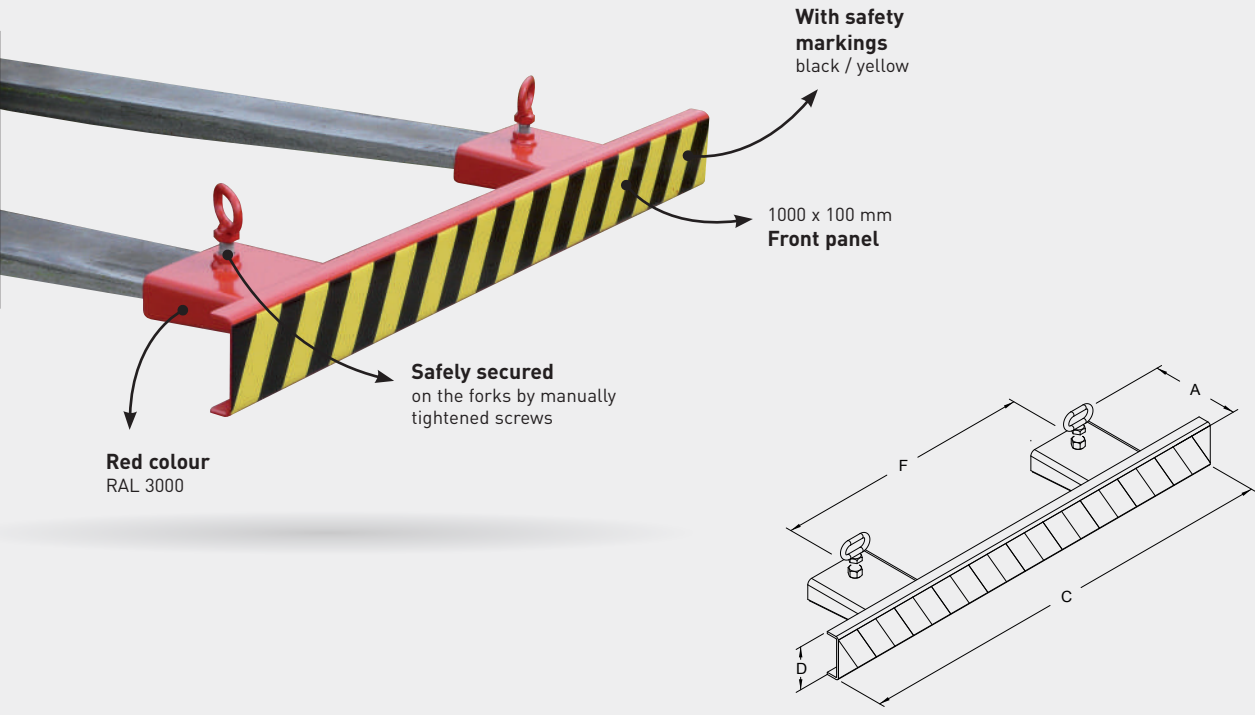

## CHARACTERISTICS

- Sleeve inlet cross-section of 145 x 40 mm and distance between sleeves (F) can be adjusted on request
- Robust construction, 5 mm thick
- Other dimensions can be made-to-measure : talk to us

A	C	D	F	Fork sleeves ins.	Weight kg	Painted ref.
205	1000	100	600	145 x 40	12	PCP10000


Dimensions in mm for basic model (for guidance only).



# MOBILE DELIVERY RAMP

QL

Handling equipment or pallets of materials on site  
Ideal for rental companies  
Truck + pallet jack

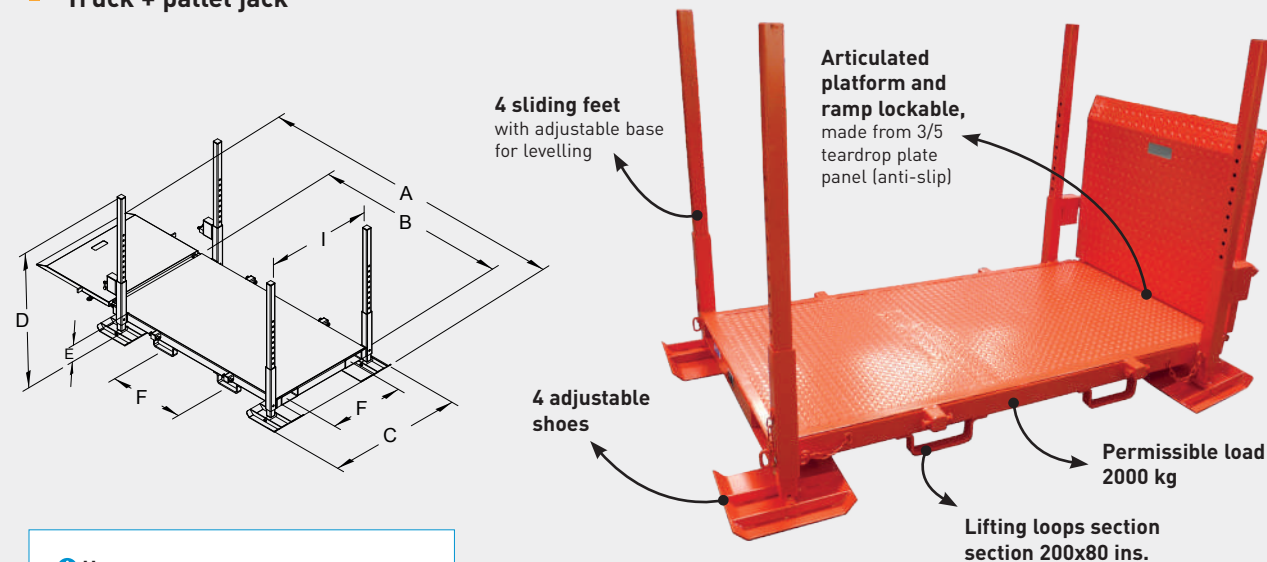

## Use

- The ramp enables you to pass above ground drainage or trenches and compensate for uneven ground.
- It enables a pallet to be delivered to a garage or enclosed area.
- Unload, wherever you wish, in spite of difficult to access sites or sites that are difficult to move around.
- Once the platform is stabilised, remove your pallet with your pallet lift/truck cranes.
- Unload using your pallet truck.

Load kg	A	B	C	I	D	E	F	Fork sleeves ins.	Weight kg	Painted ref.
2000	2790	1800	1260	980	1300	190	700	170 x 70	270	QLP20000

Dimensions in mm for basic model (for guidance only).



- Unloading by pallet lift  
- 4 lashing points for ratchet-straps



Displacement unladen with forks in forks section 170x70 fixed distance 700 mm



Pallet unloaded at difficult to access site



Special trailer bed



Special unloading



Can also be made with 2 removable mesh drop panels and 1 steel-panel bottom

# BARREL INVERTER FITTED TO FORKLIFT TRUCK FORKS

RB

For standard metal barrels, 572 mm in diam.  
For handling, transportation and controlled draining of barrels.  
3 models.

## CHARACTERISTICS


### COMMON TO THE 3 MODELS :

- Permissible load 350 kg
- Fork grip in sleeves with a int. cross-section of 170 x 70 mm
- Fork end grip safety system with removable pin
- Barrel is held in position by articulated steel belt and adjustable eccentric closure with safety pin
- 360 degree rotation with stops in all positions
- Options on RBP20000 : remote control by chain steering wheel, special distance between forks, different barrel diameters (on request) depending on options


## Ref. RBP30000

Lower centre-section grip tilter - Weight 80 kg

Tilted by reduction gearing (20 turns of the hand-wheel to move 90 degrees) with automatic braking system

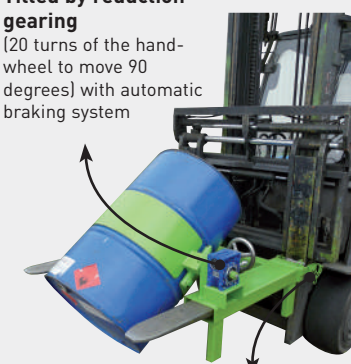

Safety system on fork end provided by removable pin

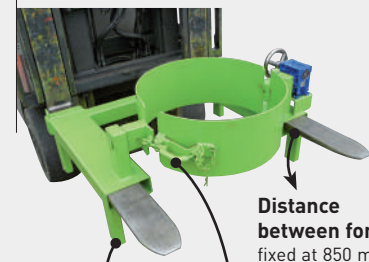

Height of feet adapted to the central and vertical grip of the barrel

Adjustable eccentric closure


## Ref. RBP20000

Upper grip inverter - Weight 130 kg



## Ref. RBP10000

Barrel inverter for rotating head forklift - Weight 70 kg

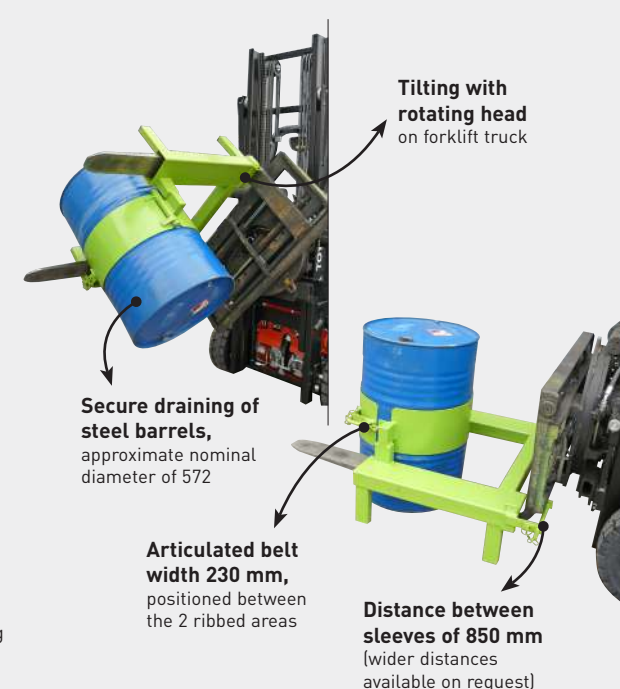




# BIN TURNER

## BOTTOM GRIP

RC

Perfect for reduced lift height.  
Bottom scoop by forks.  
Calibrated for your bins.  
Max. load 500 kg.

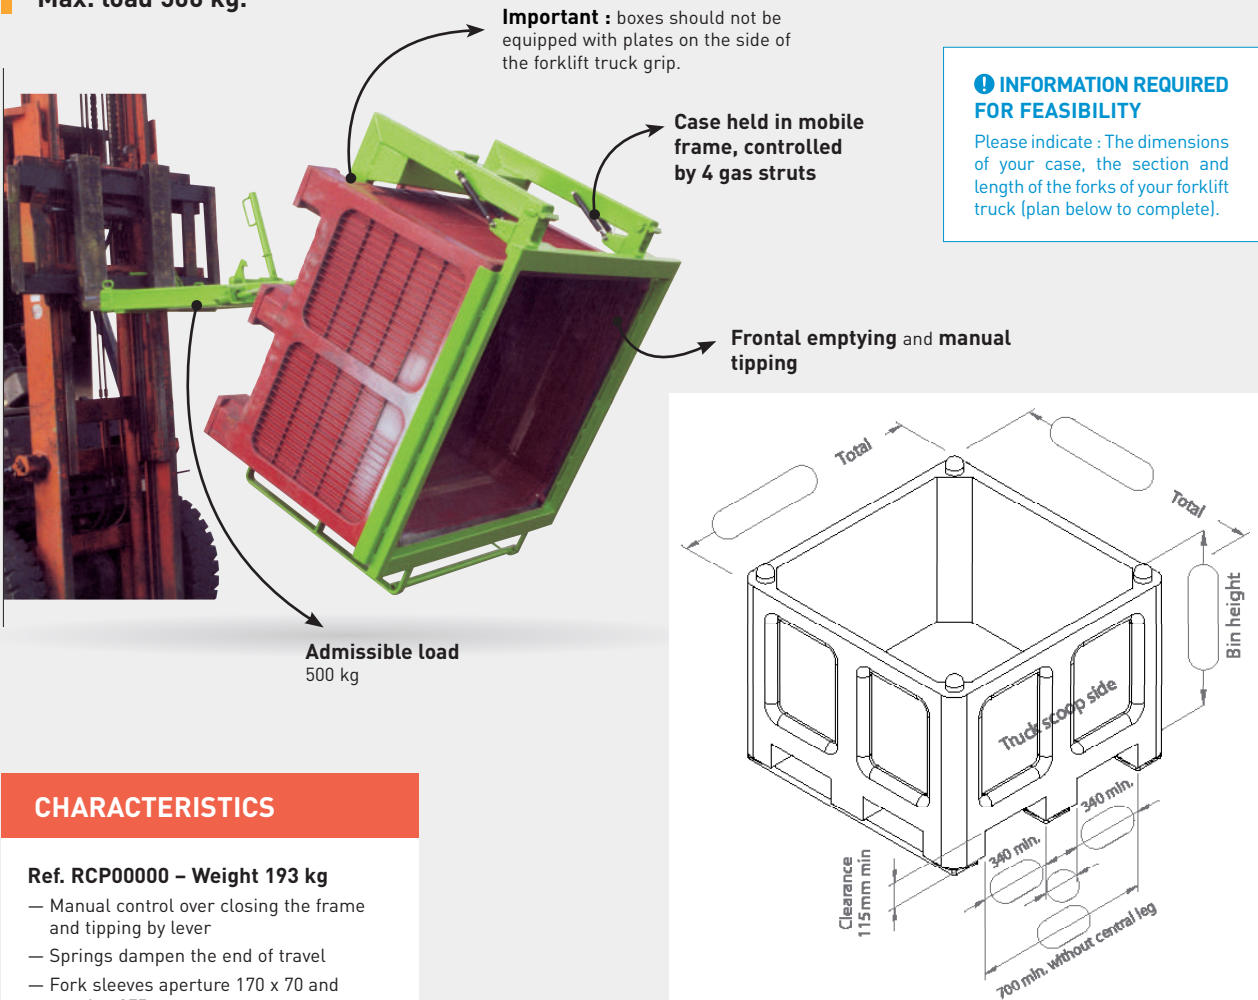

### ! INFORMATION REQUIRED FOR FEASIBILITY

Please indicate : The dimensions of your case, the section and length of the forks of your forklift truck (plan below to complete).

### CHARACTERISTICS

**Ref. RCP00000 – Weight 193 kg**

- Manual control over closing the frame and tipping by lever
- Springs dampen the end of travel
- Fork sleeves aperture 170 x 70 and spacing 375 mm
- Safety locking mechanism on 1 fork heel

Table to download from our website (see RC page).  
One of your bin is necessary to fit our RC.



# BIN TURNER

## UPPER GRIP

RP

Suitable for all types of cases.  
Upper lifting using forklift truck.  
Load max 1500 kg depending on model.


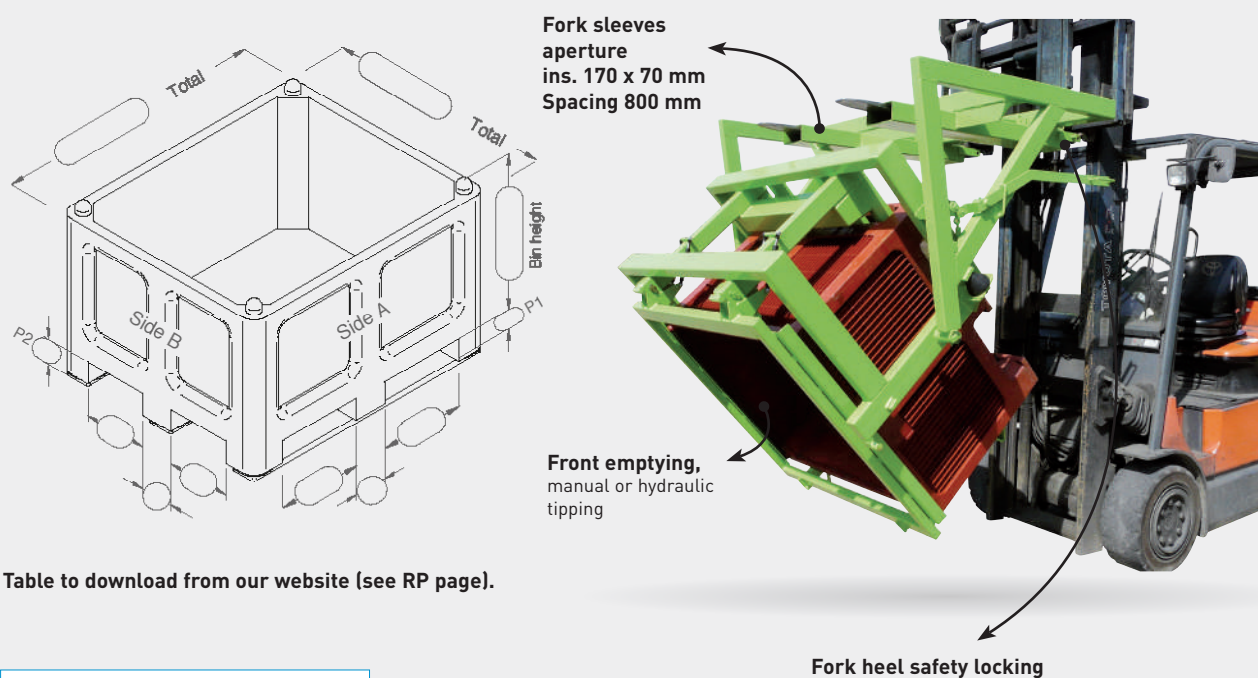


Table to download from our website (see RP page).

### ! INFORMATION REQUIRED FOR FEASIBILITY

Please indicate : The dimensions of your case by filling in the above diagram. – forklift side indicated by A or B, bearing in mind there must be a minimum gap of 90mm (mark P1-P2). Cross section of your forks – Lifting height of forklift mast – Height of container.

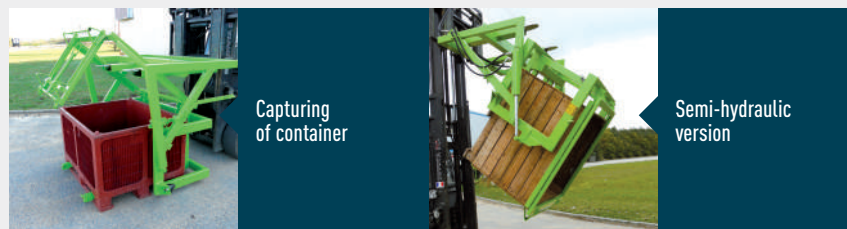

### CHARACTERISTICS

One of your bin is necessary to fit our RP.

#### 4 MODELS :

**Manual version**  
Ref. RPP00000 for loads > à 500 kg

- Case stays inside the mobile frame mobile, fitted with 4 gas struts
- Frame closing and tipping controlled manually by lever

**Manual version**  
Ref. RPP10000 for loads < à 500 kg

- Case stays inside the mobile frame mobile, fitted with 4 gas struts
- Frame closing and tipping controlled manually by lever

**Semi-hydraulic version**  
Ref. RPP20000

- Load capacity 1500 kg
- Works exactly like the manual version with regards to the mobile frame.
- Hydraulic switch actuated by 2 double-action jacks (to connect to forklift).

**Fully hydraulic version**  
Ref. RPP30000

- Larger frame and hydraulic tipping (to connect to forklift)
- Customised production available - Contact us



# PLASTERBOARD HANDLER

MP

# VISUAL AND KINEMATIC DESCRIPTION OF THE USE OF THE BOARD HANDLER

MP


Facilitates distribution of single units by sliding plasterboards of different thicknesses.  
An innovative feature that prevents musculoskeletal problems.  
Approved by a regulatory body.  
Vertical storage.



## CHARACTERISTICS

### Board carrier trolley Ref. MPP20000

- Permissible load 2000 kg
- Trolley with 4 high-density polyethylene feet
- Two forklift truck fork grips in 165 x 55 int. sleeves, distance between sleeves 660 mm
- 1 central grip for handling with the spreader
- Removal support arms with polyurethane wheels
- Painted equipment - Weight 244 kg

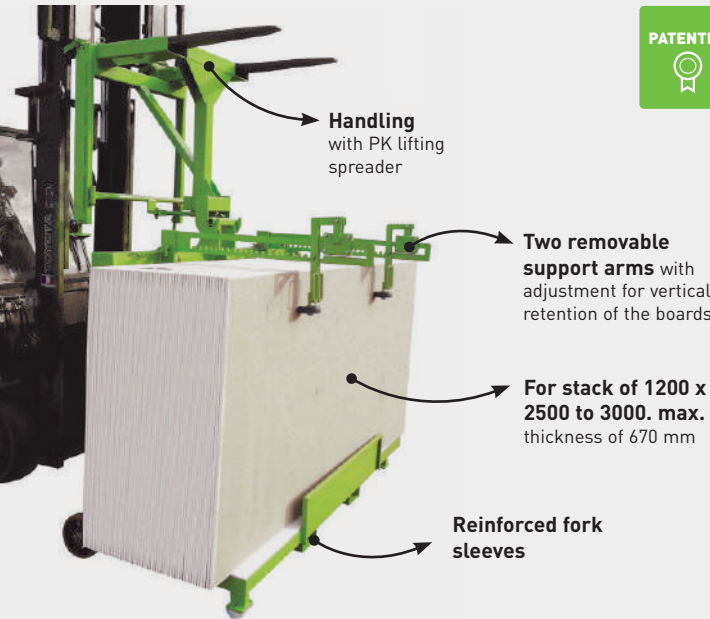

Boards are loaded onto the trolley



Stack placed on trolley



Adjustable retaining arms fitted



PK spreader put on forklift truck



Handling trolley gripped by the spreader - Lever is unclipped by automatic locking of the hook onto the handling trolley with no intervention from the forklift driver



Trolley tilted vertically, the 4 high-density polyethylene feet prevent the ground from being marked



Trolley in unloading position before removal of the PK spreader



Lever clipped on to enable the spreader to be unhooked and removed



Easy loading by just sliding the boards to the right - After loading, the adjustment arms need to be repositioned to hold the remaining boards




## CHARACTERISTICS

### Handling spreader Ref. PKP20000

- 1 single spreader can manage a range of board holder trolleys
- Fork grips in 170 x 70 int. sleeves, distance between sleeves 660 mm
- Gripping hook with automatic locking system and manual unlocking lever located next to the bulkhead
- Weight 86 kg



**! ATTENTION :** Prior to use, accessory + forklift / crane acceptance procedures must be carried out by your authorised inspection body.

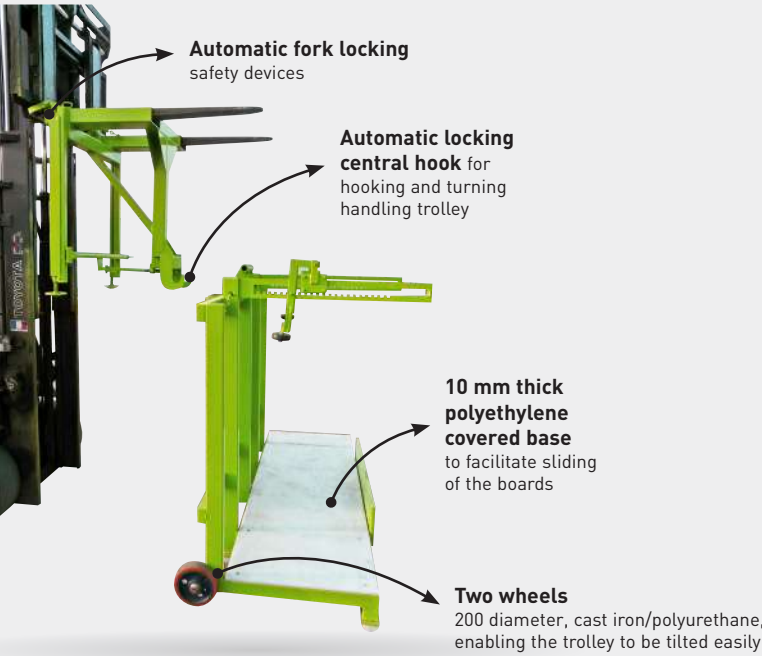



# OPTIONS

## OPTIONS FINISH/BLOCKING/RELEASE

### Finishing choice :

Stainless steel, galvanized version or customised paintwork



### Blocking on forks (BFP)



### Automatic release (DAP) :

by pressure, by contact, by drawbar






# OPTIONS

## LIDS

**Sliding lid (CLP)**

plastic strips or metal version

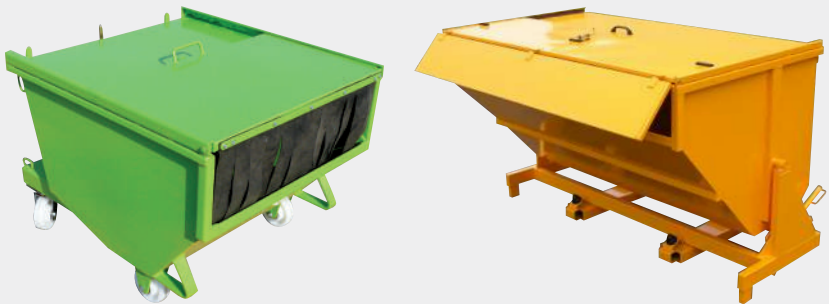

**Dead-light**

(OPP)



**For stacker**



**Clamps hold**

on tipping bin



**Clamps hold**

on drop bottom skip



**Hinged two parts lid**

(COP)




**Folding lid**

on BR



**Custom removable lid**

(COS)

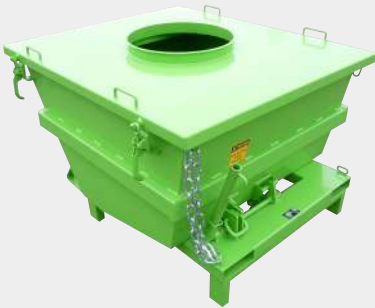

**Guide flanges**

(FLP)



**Fork sleeves on 3 sides**

(PTP)



**Fixed lid**

with virole (CVP)



**Articulated lid**

with 1 ferrule (VIP)



**Special cover**

Lockable, opening with gas compass



**Opening limiter**

(LOP)




**Noise reduction coating**





# OPTIONS

**Grille and drain tap**  
(GRP)

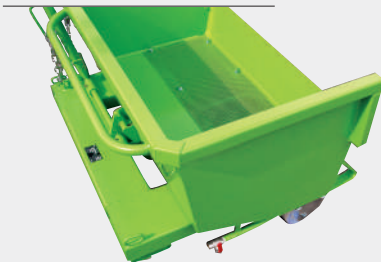

**Leakproof door**  
with foam seal (FEP)



**Adhesive letters**  
(MAP)



**4 lifting lugs**  
(BAP)



**Security by screw**



**Draw bar hitching**  
(TRP10000)



**Tarpaulin or netting**  
(FBP)




**Leakproof inspection window**  
on lid - (TEP)



**Deceleration cylinder**  
for end of tipping process (VRP)



**Hydraulic tipping**  
1 or 2 cylinders (BHP)



**Lid**  
with aluminum roller shutter



**Customized leak-proof lid**  
with ferrule on tipping skip



**Cross fork sleeves**  
on FAP/CAP models (FVP)



OTHER OPTIONS  
CONSULT US



# CUSTOM MADE PRODUCTS

## CUSTOM MADE PRODUCTS



### IMAGINE, INNOVATE, CREATE, GAIN YOUR TRUST...



With **recognized know-how**, an ability to listen and professional expertise, we add to our wide range of standard products with tailor-made products to become your ideal partner and offer you :

- Unique expertise in the analysis of your requirements
- Personalised advice
- Solutions to each of your issues
- A proactive service
- Guaranteed quality, reliability and safety




**Our design office works** every day to invent and develop products to provide you with solutions adapted to your requirements and the regulations (EC).

**The contract manager** is your contact with all the company's services. They guide you through the development of your project and answer all of your questions.

**Talk to us and benefit from our experience.**



**A tailor-made product designed to meet all your requirements !**

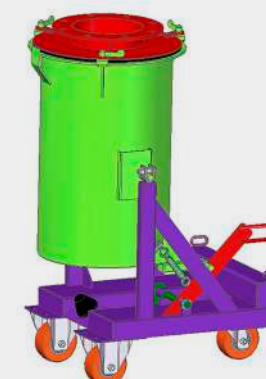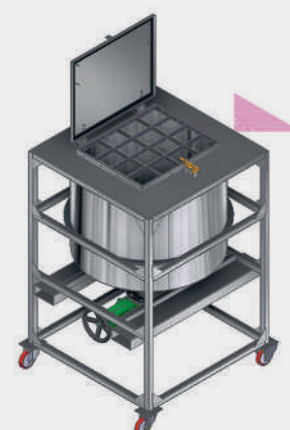



# CUSTOM MADE PRODUCTS

**Multi-compartment skip**  
Tilting or opening bottom



**Adaptation fork sleeves**  
For lift truck with clamps



**Skip**  
for machine environment



**Wire mesh version**



**Faggot mould**



**BR-C skip**  
with command of opening lid  
with pedal



**Special spur**



**Adaptation**  
with hinged tipping




**Bin with opercule**  
or special glass hatch



**Specific adaptation**


**Geared motor**

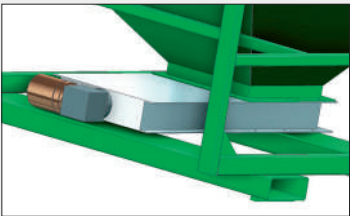

**Hydraulic vibrator**



**GPS-plotter**

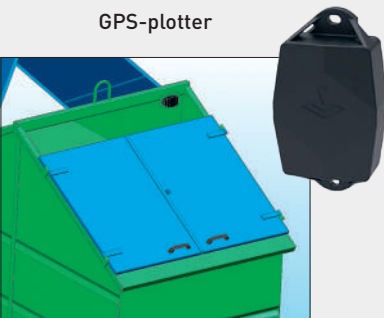



# CUSTOM MADE PRODUCTS


**Skip**  
with double-axle steering



**Mounting on specific wheels**  
For use with or without



**Special skip**  
for telescopic truck



**Truck**  
for fire equipment



**Truck**  
Handling





**Grab point**



**Open-bottom skip**  
with special lid



**Open sides**  
for long products

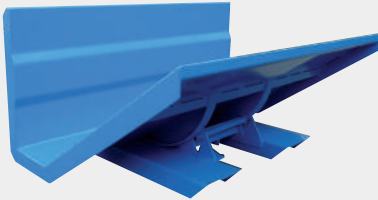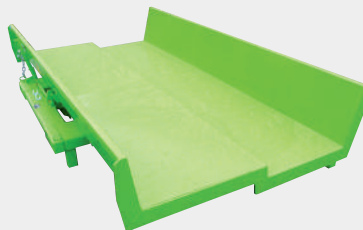

**Mobile ramp**  
special QL





# CUSTOM MADE PRODUCTS

**Reinforced skips**  
Steelworks / foundry / aspiration



**Hydraulic tilting**  
on tipping skip



**Retarder cylinder**



**Sloped bottom skip**  
special



## TELL US WHAT YOU NEED AND WE'LL MAKE THE SKIP TO FIT!



FOR A FREE ESTIMATE, PLEASE FILL IN THE FORM BELOW AND RETURN IT TO US.


Company : .....  
Contact/Name : .....  
Address : .....  
Post code : ..... City : .....  
Tel. : ..... Fax : ..... E-mail : .....  
Sphere of activity : .....

### YOUR TECHNICAL REQUIREMENTS

Type of products handled : .....  
Estimated load : .....  
FINISH : Painted ☐ galvanized ☐ Stainless steel ☐ Food-safe paint ☐ Leak proof bin ☐  
TYPE : Pedestal-mounted model ☐ Castor-mounted model ☐ 2 fixed + 2 pivoting ☐ 4 pivoting ☐  
Forward movement ☐ Lateral movement ☐  
For use with : Forklift ☐ Stacker ☐  
Tipping system : Manual ☐ Hydraulic ☐  
QUANTITY : .....  
DESIRED OPTIONS AND/OR COMMENTS : .....  
.....

### DIMENSIONS REQUIRED

A (overall depth) : .....  
or  
B (interior depth) : .....  
C (overall width) : .....  
or  
I (interior width)) : .....  
D (overall height) : .....  
F (fork sleeves spacing) : .....  
Dimensions of your forks : ..... X .....

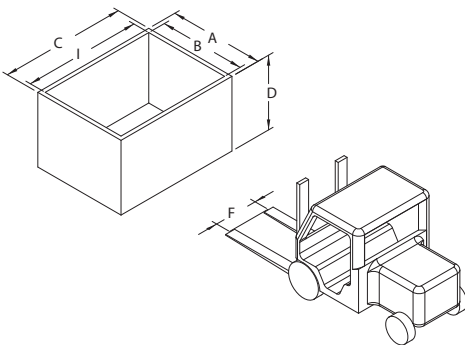




NOTES

# ADD COLOUR TO YOUR WORKING ENVIRONMENT!

Our products are coated with a green polyurethane paint. As standard, we also offer the range of RAL colours below. Other RAL colours are available as an option so that our products can integrate seamlessly into your environment.

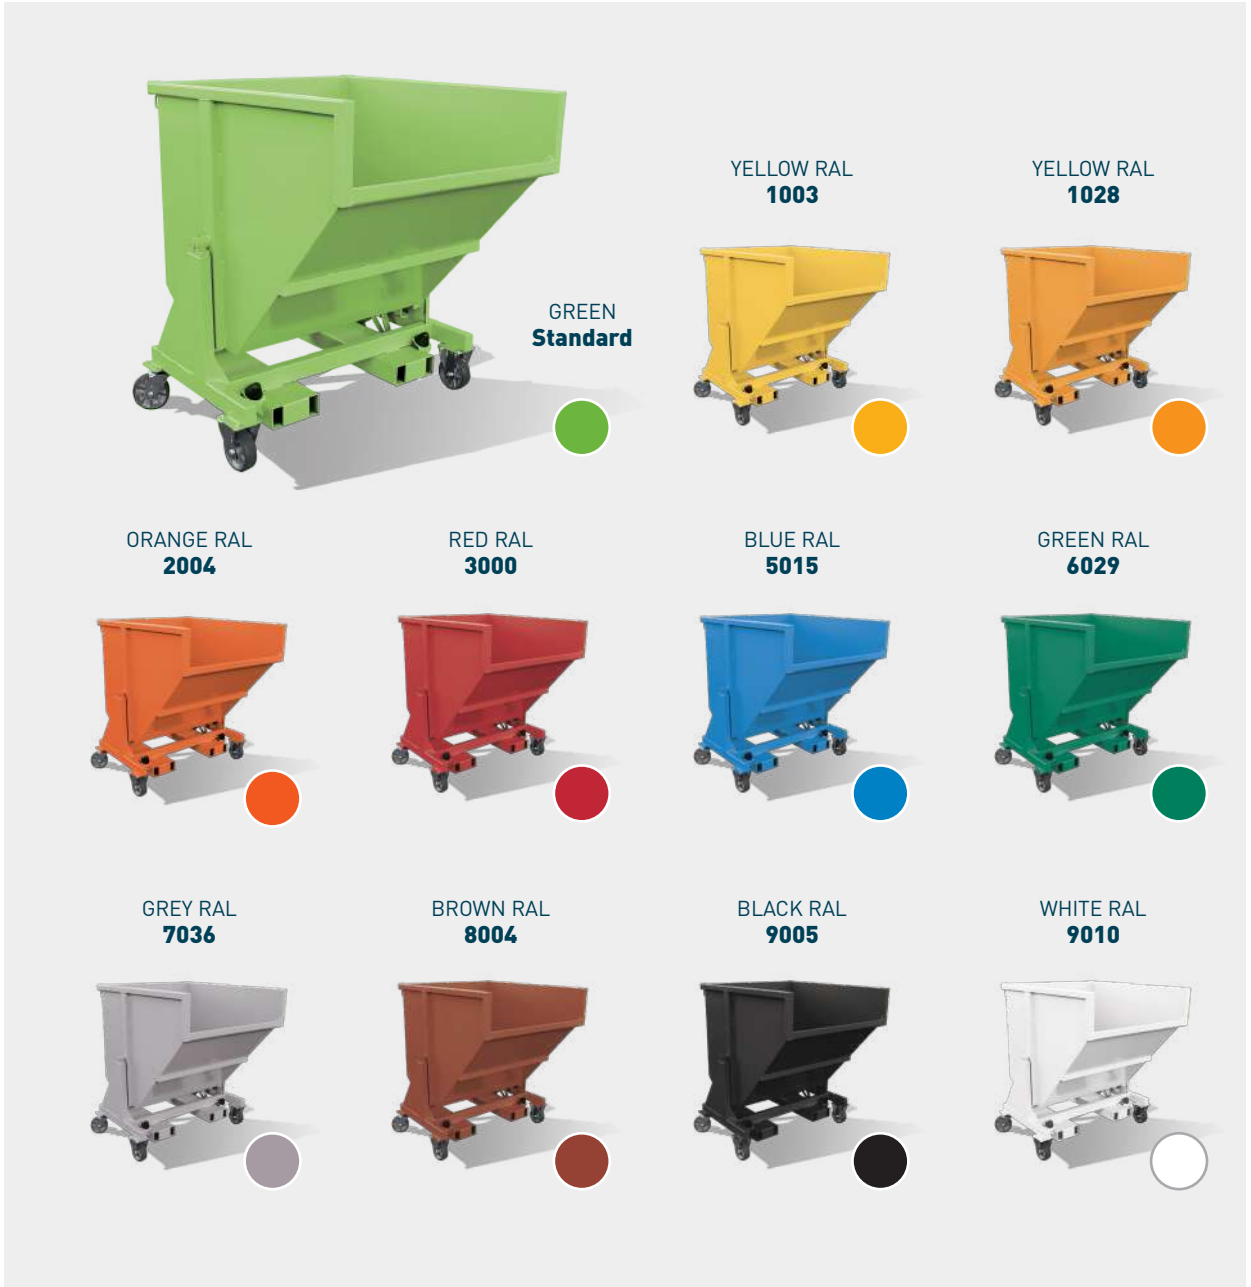



# To facilitate your work on the web

WEB SITE



Find our equipment on  
**[www.goubard.fr](http://www.goubard.fr)**.



## Contact us.

Z.A. de Suzerolle nord  
49140 Seiches-sur-le-Loir

**T. +33 (2) 41 76 36 52**  
**M. [export@goubard.fr](mailto:export@goubard.fr)**

VISIT CARD



## Watch our demo videos on **Youtube**.

The trick ? Activate the bell  
to be alerted at every product release!

YOUTUBE

LINKEDIN



## Follow our news on **Linkedin**.

And log in to your sales  
executive if you wish.

Do you want to stop receiving the Goubard catalogue in paper format?  
Let us know, so that we only send you the link to the digital catalogue.