



TIPPING SKIP HIGH-CAPACITY

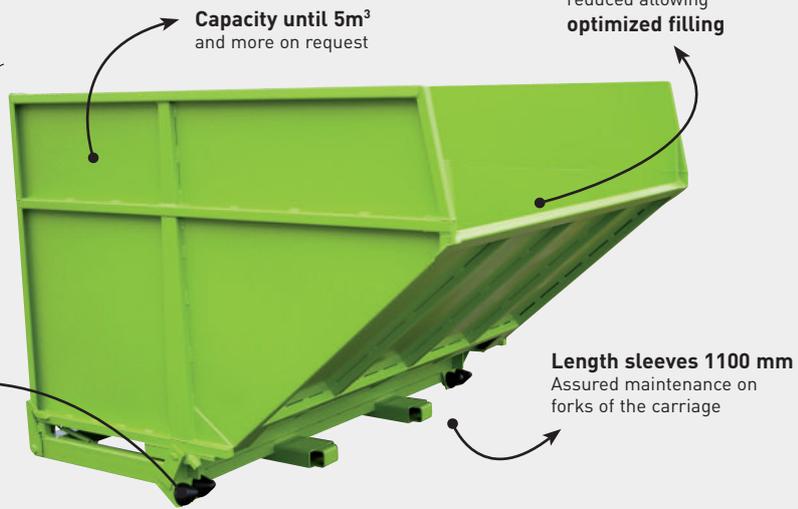

High-capacity.
For low-density, voluminous or bulky waste.

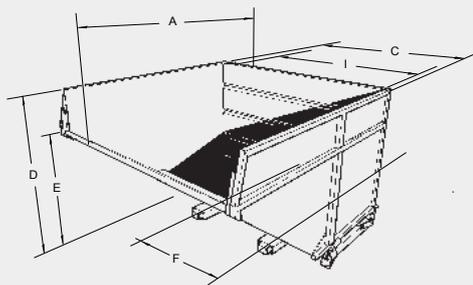

Emptying onto heap



Hydraulic tipping system



Great volume with reduced height

CHARACTERISTICS

- Capacity : 1300 to 4600 litres
- Bin : 3 mm sheet metal with reinforcements
- Upper edge : 3-ply blunt rim
- Safety latch for transport (disengage before tipping)
- Lever for manual tipping (automatic on request)
- Fork sleeves : reinforced entry points, aperture 170 x 70 mm and fork spacing (F) can be modified on request
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Safety chain included
- Castor mounted models : contact us

Capacity litres	Load kg	A	C	I	D	E	F	Weight kg	Painted ref.
90 series - Int. bin height 900 mm									
1300	2000	2000	1155	1000	1190	1060	730	308	AGP13000
2000	2000	2000	1630	1500	1190	1060	900	360	AGP20000
2600	2300	2000	2130	2000	1190	1060	900	431	AGP30000
130 series - Int. bin height 1300 mm									
3800	2600	2090	2130	2000	1510	1130	900	495	AGP40000
140 series - Int. bin height 1400 mm									
4600	3000	2090	2330	2200	1610	1140	900	565	AGP50000

Dimensions in mm for basic model (for guidance only). Centre of gravity (1200 forks) = 1000