

JIB FOR WELDED WIRE MESH



Safe and user-friendly handling of welded wire mesh.
Approved by an inspection body.




CRP07000
sécurité par chaînes



CRP17000
Fork heel blocking device



CRP27000
Automatic blocking on forks

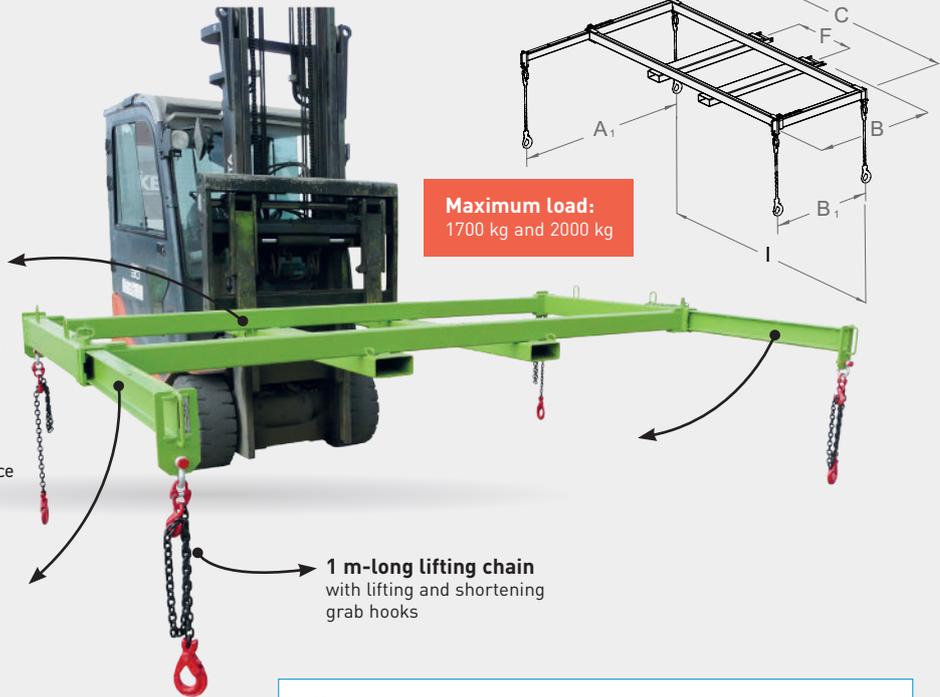

Maximum load:
1700 kg and 2000 kg

1 m-long lifting chain
with lifting and shortening
grab hooks

! ATTENTION: Prior to use, accessory + forklift acceptance procedures must be carried out by your authorised inspection body.



CRP07000 –
version with fixed
booms



Chain with hook
and grab hook



Chains stowed
after use

CHARACTERISTICS

- Maximum load: 1700 kg and 2000 kg
- Jib width: 3000 mm
- On CRP17000 and CRP27000: 2 adjustable cross-bars: 1200 to 2000 mm with latch (4 fixed positions)
- Fork sleeves aperture: 170 x 70 mm in 5 mm sheet metal. Spacing: see F in table. Can be modified on request
- With a safety device on the fork heels
- Detachable and interchangeable booms
- On CRP07000 Fixed nondetachable booms

Load kg	B1	B	A1	C	I	F	Fork sleeves ins.	Weight kg	Painted ref.
1700	-	2200	2000	3100	3000	800	170 x 70	209	CRP07000
1700	1170	1500	2000	3100	3000	800	170 x 70	208	CRP17000
2000	1170	1500	2000	3100	3000	800	170 x 70	226	CRP27000

Dimensions in mm for basic model (for guidance only).