


REINFORCED AUTO TIPPING SKIP



For heavy waste.
(rubble, waste of building site, metals).
Catch with the heel of the forks.

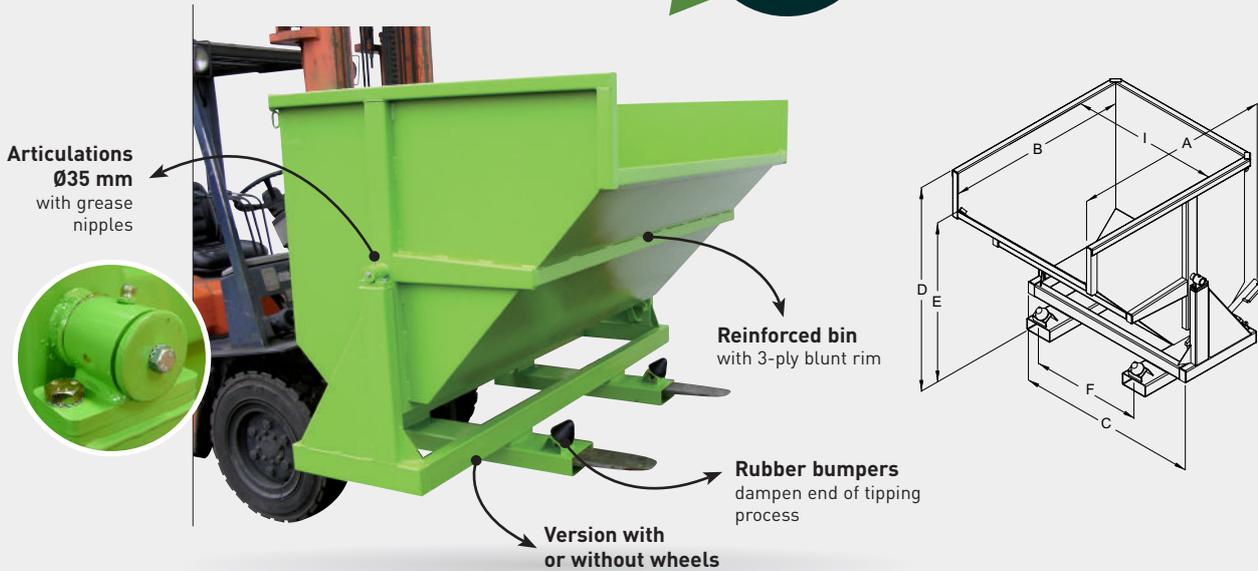

CHARACTERISTICS

- Capacity : 550 to 2500 litres
- Reinforced bin with 3-ply blunt rim
- Stiffeners reinforce bin front, sides and bottom
- Rigid tubular chassis : 4 and 5 mm sheet metal
- Safety latch for transport (disengage before tipping)
- Open-end fork guides, except ref. INP25000
- Lever for manual tipping
- Fork sleeves can be modified on request. Aperture : 170 x 70 mm. Spacing : see F in table
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Safety chain included
- Options on request

Capacity litres	Load kg	Castors Ø	Movement	A	B	C	I	D	E	F	Weight kg	Painted ref.
80 series - Bin height 800 mm												
550	2000	-		1250	1200	1000	750	1250	1080	740	180	INP05000
550	1800	160 P	Fwd.	1280	1200	1000	750	1295	1125	310	194	INP05161
750	2000	-		1250	1200	1250	1000	1250	1080	740	205	INP08000
750	1800	160 P	Fwd.	1280	1200	1250	1000	1295	1125	560	217	INP08161
950	2500	-		1250	1200	1500	1250	1250	1080	900	220	INP10000
950	2400	160 F	Lat.	1280	1200	1500	1250	1295	1125	810	240	INP10162
1150	2500	-		1250	1200	1750	1500	1250	1080	900	240	INP12000
1150	2400	160 F	Lat.	1280	1200	1750	1500	1295	1125	900	260	INP12162
100 series - Bin height 1000 mm												
950	2500	-		1300	1220	1250	1000	1400	1140	740	230	INP11000
950	2400	160 F	Fwd.	1330	1220	1250	1000	1460	1210	560	250	INP11162
1450	2800	-		1300	1220	1750	1500	1400	1140	900	285	INP15000
1450	2400	160 F	Lat.	1330	1220	1750	1500	1460	1210	900	305	INP15162
1950	3000	-		1300	1220	2250	2000	1400	1140	900	320	INP20000
1950	2400	160 F	Lat.	1330	1220	2250	2000	1460	1210	900	340	INP20162
120 series - Bin height 1200 mm												
2500	3000	-		1470	1325	2250	2000	1625	1280	900	372	INP25000

Lat. : Lateral movement - Fwd. : Forward movement - Castors : P= Alu/polyurethane, C=Cast iron/polyurethane
Dimensions in mm for basic model (for guidance only).