


BIG-BAG FILLER BUCKET

WITH HYDRAULIC FLAP - 2T LOAD



- Direct lifting on forklis.
- Simultaneous material pick-up from the ground/floor and big-bag filling.
- Certified by an approved body
- Increased productivity and safety - Accurate and fast filling

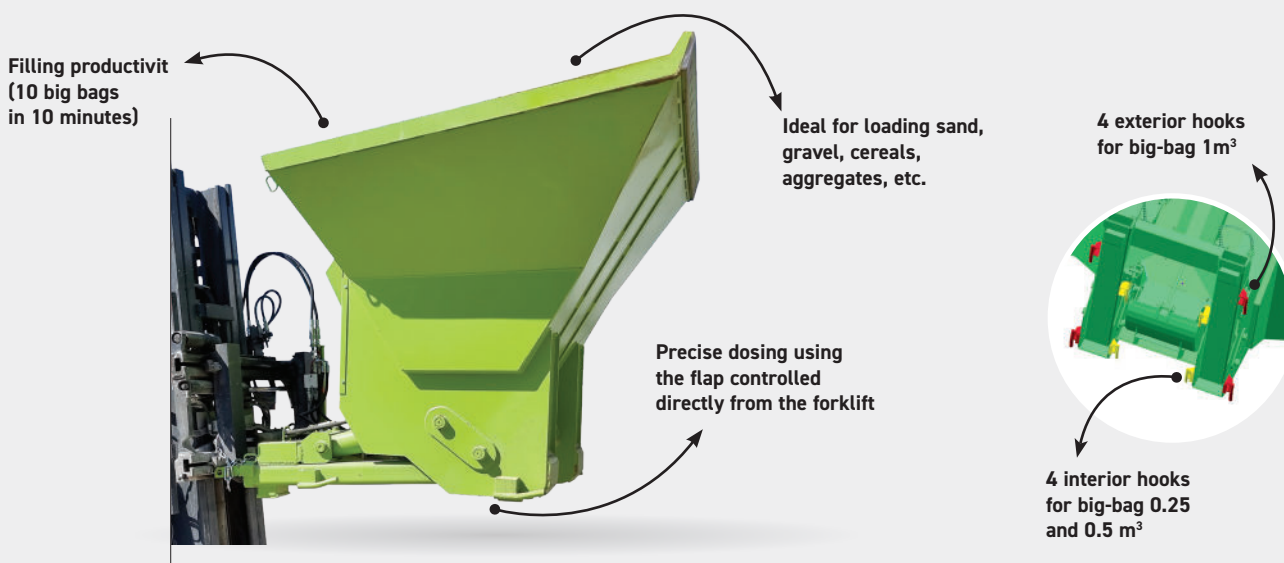

REGULATORY VERIFICATION: Before use, check the adequacy between the lifting accessory, the fork-lift/crane and the use.

RECOMMENDED FORKLIFT: 4.5T capacity forklift truck - with forks length 1200 max / forks Lg 1000 max and 3T forklift for GBP05000. Only 1 auxiliary hydraulic connection is required

SPECIFICATIONS

- Capacity 1430 litres for loading 1m³ big-bags
- Pick-up width 2080 mm
- 2 x 100x50 double-acting cylinders for the loading function
- 1 x 40x25 double-acting cylinder for the cover opening function
- Automatic system for controlling the 2 functions via a single hydraulic connection
- Caution:** The 2 functions run one after the other without any dead time.
- 3/8" push-pull connection to accessory (hose to the fork-lift not supplied)
- Cover hatch 350 x 450 mm
- Locks on forks with 8 mm diameter lifting chains
- Removable counter blade
- 4 quick-release big-bag sling points
- 250 or 500 litre big-bag filling possible with optional kit
- Bag lifting MWL 2 T



For loading big-bag of:			Load kg	Overall profile	Pick-up width	Overall height	Center distance	Fork sleeves inside section	Weight kg	Painted ref.
0,25 m ³	0,5 m ³	1 m ³								
x	x		1100	1430	1630	1275	900	188 x 88	650	GBP05000
		x	2200	1800	2080	1550	900	188 x 88	780	GBP10000
x	x	x	2200	1800	2080	1550	900	188 x 88	800	GBP10001

Dimensions shown in mm excluding options and without engagement.