


DROP-BOTTOM SKIP

ESSENTIAL – WORKING LOAD 1000KG



Economical.
Simplicity, reliability.

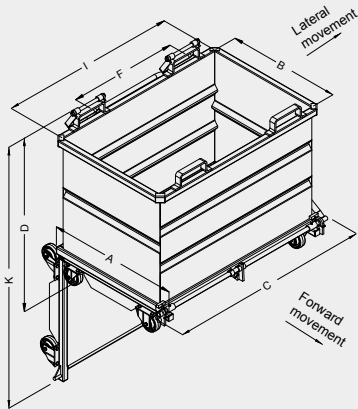

Upper edge
3-ply blunt rim reinforced
under fork aperture

Manual release
with lever

Safety pin

**Version with
or without wheels**



NOTE : Please ensure the forklift mast is at a suitable height (add value K from the table to the collection skip height). Check the section and the length of the forks – minimum length 1200mm (please contact us if lower length).



CHARACTERISTICS

- 3 capacities : 500, 800, 1000 litres
- Sheet metal bin 2 mm rib with reinforced corners
- Upper fork aperture 200 x 80 mm. 700 mm fork spacing (F)
- Caster-mounted model equipped with 2 fixed and 2 pivoting Ø 125 nylon casters (forward movement)
- One safety chain included

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	K	Weight kg	Painted ref.
500	1000	-	865	750	1335	1185	735	1405	90	FEP05000
500	1000	125N	865	750	1335	1185	800	1405	98	FEP05120
800	1000	-	865	750	1335	1185	1125	1792	110	FEP08000
800	1000	125N	865	750	1335	1185	1185	1792	118	FEP08120
1000	1000	-	865	750	1335	1185	1345	2012	125	FEP10000
1000	1000	125N	865	750	1335	1185	1405	2012	133	FEP10120

Dimensions in mm for basic model (for guidance only).