

# VACUUM-READY TIPPING SKIP




- Waste collector for vacuum extractor.
- Withstands up to 40 kPa.
- Versatile connections.

## TIPPING REDUCED-HEIGHT-GA

### CHARACTERISTICS

- Capacity : 520 litres
- Leak-proof bin : 3 and 4 mm sheet metal with non-deformable reinforcements
- Automatically unlocks and tips. Lever for manual tipping
- Pedestal-mounted models can be used with pallet trucks (under fork sleeves)
- Castor-mounted models (forward movement) have a handrail and 2 fixed + 2 pivoting Ø125 mm alu/polyurethane castors
- For customised products, please contact us
- Safety chain included

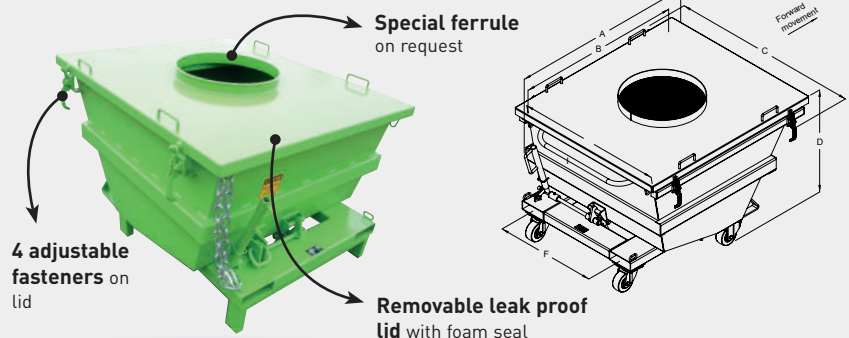


Capacity litres	Load kg	Castors Ø	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
520	1200	-	1370	1160	1200	1000	820	700	165 x 55	205	GAP05000
520	1200	125	1370	1160	1200	1000	850	700	165 x 55	215	GAP05121

Dimensions in mm for basic model (for guidance only). D : overall height not including ferrules

## SLOPED BOTTOM - IA

### CHARACTERISTICS

- Capacity : 530, 1000 and 1500 litres
- Bin : 3 mm sheet metal with 4 mm non-deformable reinforcements
- Fixed welded leak proof lid with rimless ferrule
- Lever for manual door opening
- Safety chain included
- Pedestal-mounted models can be used with pallet trucks (between fork sleeves)
- Castor-mounted models (forward movement) have a handrail and 2 fixed + 2 pivoting Ø160 mm alu/polyurethane castors
- For customised products, please contact us

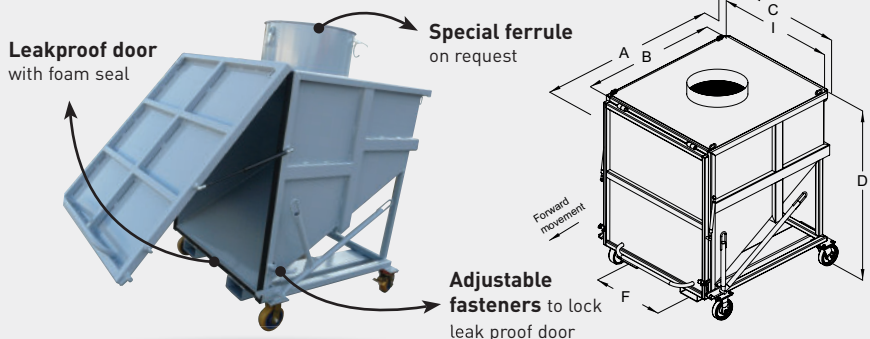

Capacity litres	Load kg	Castors Ø	A	B	C	I	D	F	Fork sleeves ins.	Weight kg	Painted ref.
530	2000	-	1030	800	1200	1000	1025	740	170 x 70	240	IAP05000
530	1800	160	1110	800	1200	1000	1155	580	170 x 70	252	IAP05161
1000	2000	-	1340	1160	1200	1000	1370	740	170 x 70	337	IAP10000
1000	1800	160	1420	1160	1200	1000	1485	620	170 x 70	349	IAP10161
1500	2000	-	1340	1160	1710	1500	1370	740	170 x 70	400	IAP15000
1500	1800	160	1420	1160	1710	1500	1485	740	170 x 70	412	IAP15161

Dimensions in mm for basic model (for guidance only). D : overall height not including ferrules